





Dear friends,

The whole team of NEDES, s.r.o. would like to thank You very much for your kindness and trust during this difficult period, but also during the entire history of our operation on the market.

We value our customers and our mutual cooperation very much. Thank You for any feedback, we are pleased, that our approach is appreciated by the ever increasing sales of our products to customers. Our goal is to continue to develop new products of the highest quality and bring them to the European market.

We believe, that You will continue to be a part of us, because that is especially our driving force for high performance.

Milí priatelia,

v mene celého tímu spoločnosti NEDES s.r.o. Vám srdečne ďakujeme za prejavenu priazeň a dôveru v tomto neľahkom období, ale aj počas celej histórie nášho fungovania na trhu.

Veľmi si vážime svojich zákazníkov a našu vzájomnú spoluprácu. Ďakujeme za každú spätnú väzbu a sme radi, že náš prístup je oceňovaný stále narastajúcim predajom nami ponúkaných produktov zákazníkom. Naším cieľom je aj naďalej vyvíjať nové výrobky s najvyššou kvalitou a prinášať ich na Európsky trh.

Veríme, že aj naďalej budete našou súčasťou, pretože najmä to je našou hnacou silou, ktorá nás ženie k vysokým výkonom.

Ing. Erik KOTLAN, PhD.
konateľ spoločnosti / director of company

LED STREET LIGHTS

06 - 13



LED HIGHBAY LIGHTS

14 - 17



LED EMERGENCY LIGHTS

18 - 19



LED CEILING LIGHTS

SERIES 1, 2, 4, 5, 6

20 - 24



LED CEILING LIGHTS

SERIES 7

25 - 33






**LED CEILING LIGHTS
SERIES 8**

34 - 45



LED DOWNLIGHTS

46 - 49

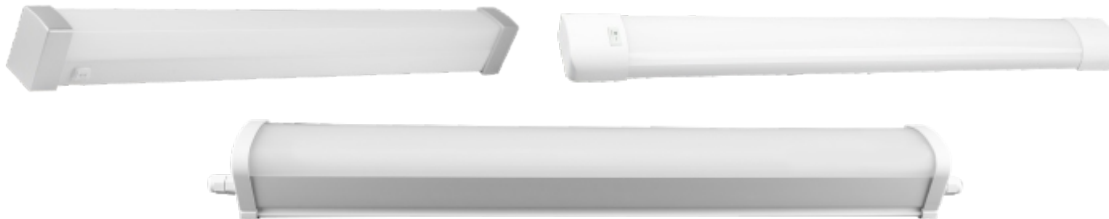

LED LINEAR LIGHTS

50 - 59



LED DESK LAMP

60 - 74

LED FLASH LIGHTS

75 - 90



LED PANELS

91 - 107



LED FLOOR LIGHTS & GARDEN LIGHTS

108 -119



CONECTORS

120



LED FLOOD LIGHTS

121 - 137





LED BULBS
138 - 166



LED TUBES
167 - 169



CABLE TIES
171 - 177





INSULATION TAPE
178 - 181



LAMP HOLDERS
182 - 183

35W


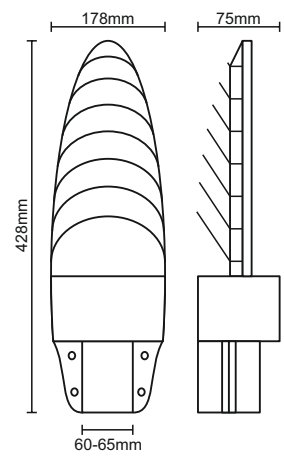


art.nr.: LSL121
tup: SL1-35W/4000K

3850 Lm 4000K AC 90-260V 35W 70W -25°C +50°C IP65 Ra≥70 50.000 50.000 h 0% 100% $\le 1.0\text{sec}$ 130° Hg free UV free



60W


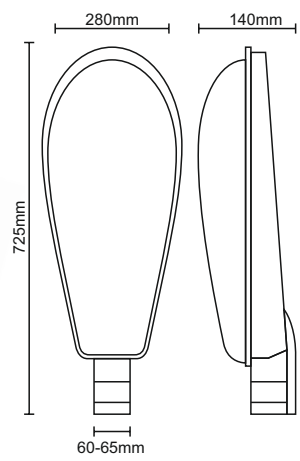


art.nr.: LSL222
tup: SL2-60W/4000K

9000 Lm 4000K AC 100-240V 60W 150W -25°C +50°C IP66 Ra≥70 50.000 50.000 h 0% 100% $\le 1.0\text{sec}$ 130° Hg free UV free



50W

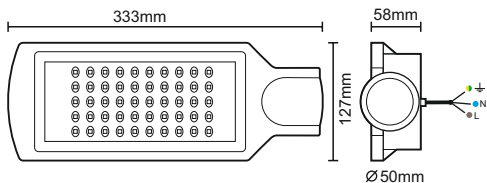



art.nr.: LSL322
typ: SL3-50/4000K



1/12

5000 Lm	4000K	AC 170-400V	50W 80W	-20°C +50°C	IP65	IK07	20.000	35.000 h	0% 100%	Light bulb icon	<1.0sec	60x140°	Hg free	UV free
---------	-------	-------------	---------	-------------	------	------	--------	----------	---------	-----------------	---------	---------	---------	---------

100W

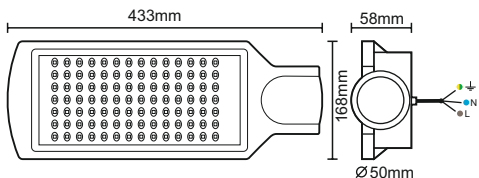

art.nr.: LSL323
typ: SL3-100/4000K



1/10

10000 Lm	4000K	AC 170-400V	100W 170W	-20°C +50°C	IP65	IK07	20.000	35.000 h	0% 100%	Light bulb icon	<1.0sec	60x140°	Hg free	UV free
----------	-------	-------------	-----------	-------------	------	------	--------	----------	---------	-----------------	---------	---------	---------	---------

ACCESS ADAPTER





art.nr.: AAS11

USED FOR:
LSL3



1/24

60W

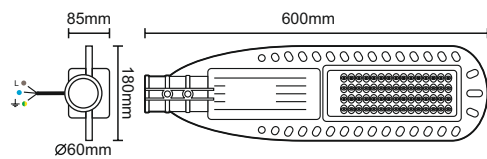



art.nr.: LSL422
tup.: SL4-60/5000K

- 8700 Lm
- 5000K
- AC 100-305V
- 60W 140W
- 25 °C +50 °C
- IP65
- IP08
- 30.000
- 50.000 h
- 0% 100%
- Light bulb icon
- <1.0sec
- 50x120°
- Hg free
- UV free

1 / 10



80W

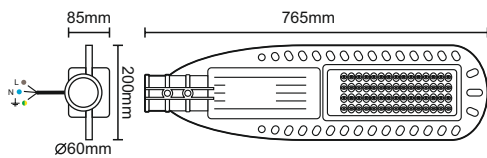



art.nr.: LSL423
tup.: SL4-80/5000K

- 11600 Lm
- 5000K
- AC 100-305V
- 80W 200W
- 25 °C +50 °C
- IP65
- IP08
- 30.000
- 50.000 h
- 0% 100%
- Light bulb icon
- <1.0sec
- 50x120°
- Hg free
- UV free

1 / 10



40W

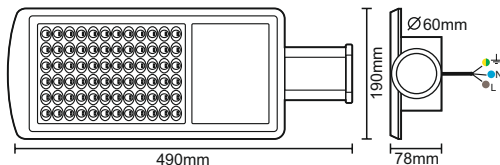



art.nr.: LSL511
tvp: SL5-40/2700K



1 / 10

5400 Lm	2700K	AC 100-277V	40W 90W	-25°C +50°C	IP65	IK08	30.000	50.000 h	0% 100%		<1.0sec	70x140°	Hg free	UV free
---------	-------	-------------	---------	-------------	------	------	--------	----------	---------	--	---------	---------	---------	---------

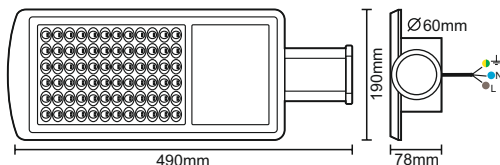

art.nr.: LSL521
tvp: SL5-40/5000K



1 / 10

5800 Lm	5000K	AC 100-277V	40W 90W	-25°C +50°C	IP65	IK08	30.000	50.000 h	0% 100%		<1.0sec	70x140°	Hg free	UV free
---------	-------	-------------	---------	-------------	------	------	--------	----------	---------	--	---------	---------	---------	---------


60W



art.nr.: LSL512
tup: SL5-60/2700K

8100 Lm	2700K	AC 100-277V	60W 140W	-25°C +50°C	IP65	IK08	30.000	50.000 h	0% 100%	☔	<1.0sec	70x140°	Hg free	UV free
---------	-------	-------------	----------	-------------	------	------	--------	----------	---------	---	---------	---------	---------	---------

1 / 10

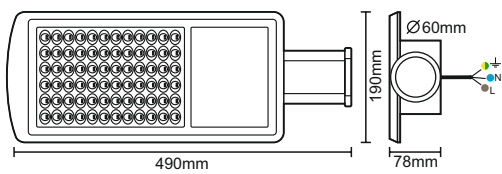



60W





art.nr.: LSL522
tup: SL5-60/5000K

8700 Lm	5000K	AC 100-277V	60W 140W	-25°C +50°C	IP65	IK08	30.000	50.000 h	0% 100%	☔	<1.0sec	70x140°	Hg free	UV free
---------	-------	-------------	----------	-------------	------	------	--------	----------	---------	---	---------	---------	---------	---------

1 / 10

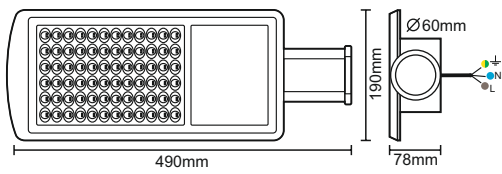


80W

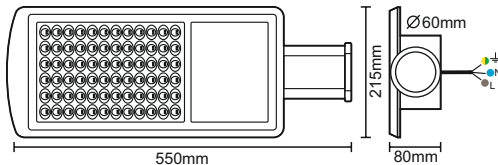

art.nr.: LSL513
tvp.: SL5-80/2700K



1 / 10

10800 Lm

2700K

AC 100-277V

80W 200W

-25°C +50°C

IP65

IK08

30.000

50.000 h

0% 100%





<1.0sec

70x140°

Hg free

UV free

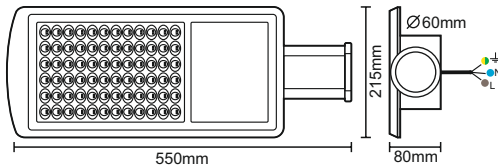

art.nr.: LSL523
tvp.: SL5-80/5000K



1 / 10

11600 Lm

5000K

AC 100-277V

80W 200W

-25°C +50°C

IP65

IK08

30.000

50.000 h

0% 100%



<1.0sec

70x140°

Hg free

UV free



80W

40W



SEOUL
SEOUL SEMICONDUCTOR

ZH DRIVER

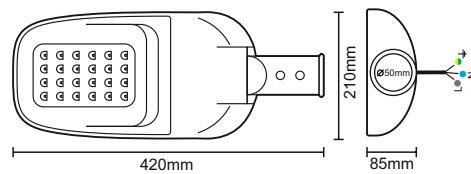

art.nr.: LSL621/RP

typ.: SL6-40/5000K/RP

5800
Lm

5000K

AC
100-277V

40W
90W

-25 °C
+50 °C

IP65

IK08

30.000

50.000 h

0% 100%

UV free

<1.0sec

36x106°

Hg free

UV free

1 / 10



8 585040 905666



Ø 50 → Ø 50

USED FOR:
LSL3
LSL4

art.nr.: **AAS01**



Ø 60 → Ø 50

USED FOR:
LSL3
LSL4

art.nr.: **AS02**



Ø 60 → Ø 50

USED FOR:
LSL3
LSL4

art.nr.: **AAS02**



Ø 60 → Ø 60

USED FOR:
LSL1
LSL2
LSL4

art.nr.: **AAS03**



150W
DIMMABLE / 1 - 10V
SENSOR 5.8GHz



LED
Philips

SOSEN
DRIVER


ENERGY LABEL

енергия - ενεργεια

A++ A+ A B C D E

A++

150 kWh/1000h

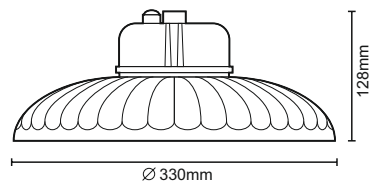

art.nr.: **LU112/SR**

typ: HB02/150W/S01/10/5000K/SR

22500 Lm | 5000K | AC 90-305V | 150W 2100W | -30°C +50°C | IP65 | IK08 | 30.000 | 50.000 h | 0% 100% | <1.0sec | 90° | Hg free | UV free



ACCESS
REMOTE CONTROLLER



art.nr.: **RLU112**

CR2025 | 3V

1 / 100



USED FOR:
LU112/SR

ACCESS
BRACKET





art.nr.: **HU12**

1 / 50



USED FOR:
LU112/SR

DIMMABLE / 1-10V
100W

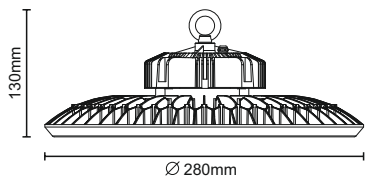



art.nr.: LU221/1

tip: HB03/100W/ZH1/10/5000K



DIMMABLE / 1-10V
150W

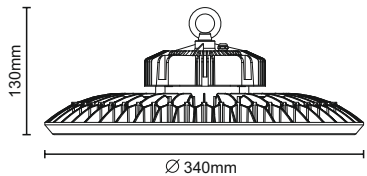



art.nr.: LU222/1

tip: HB03/150W/ZH1/10/5000K



DIMMABLE / 1-10V
200W

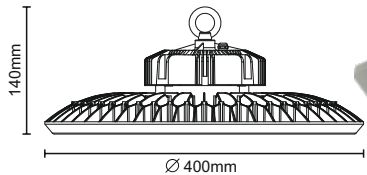



art.nr.: LU223/1

tip: HB03/200W/ZH1/10/5000K



150W
DIMMABLE / DALI

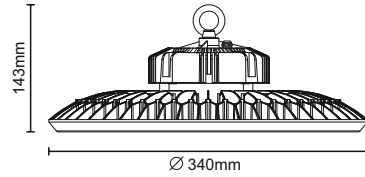

art.nr.: **LU222/DALI**


typ: HBO3/150W/SO/DALI/5000K



ACCESS
REMOTE CONTROLLER



art.nr.: **RLU2/1**

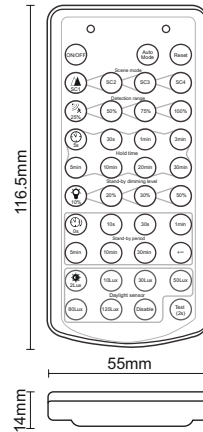

USED FOR:
SM2/1


ACCESS
SENSOR 5.8GHZ



art.nr.: **SM2/1**



L: ● (12V) ---- ● (12V)
N: ● (Dim-) ---- ● (GND&Dim-)
E: ● (Dim+) ---- ● (Dim+)

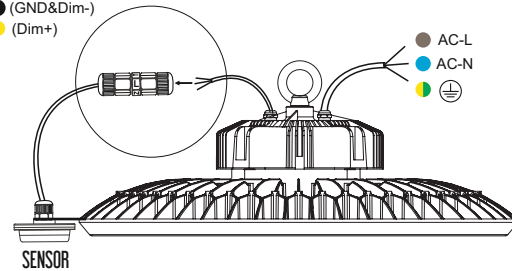

USED FOR:
LU221/1
LU222/1
LU223/1



USED FOR:
LU221

art.nr.: HU21



1/50



USED FOR:
LU222

art.nr.: HU22



1/50



USED FOR:
LU223

art.nr.: HU23



1/50



USED FOR:
LU221

art.nr.: CU21/60



1/100



USED FOR:
LU222

art.nr.: CU22/60



1/100



USED FOR:
LU223

art.nr.: CU23/60



1/100



USED FOR:
LU221

art.nr.: CU21/120



1/100



USED FOR:
LU222

art.nr.: CU22/120



1/100



USED FOR:
LU223



art.nr.: CU23/120



1/100




3W
LED EMERGENCY

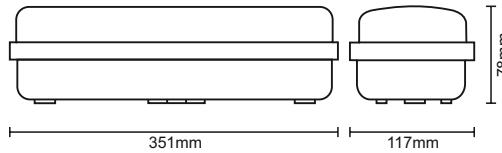

art.nr.: LEL101



tup: EML01/3W/3H/6000K



1 / 12



1W
LED EMERGENCY

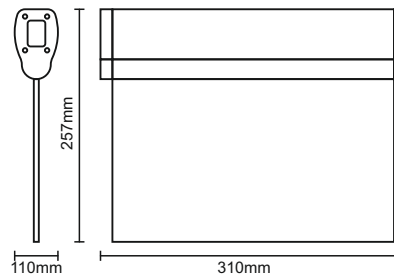

art.nr.: LEL201



tup: EML02/1W/3H/6000K



1 / 10



2W
LED EMERGENCY

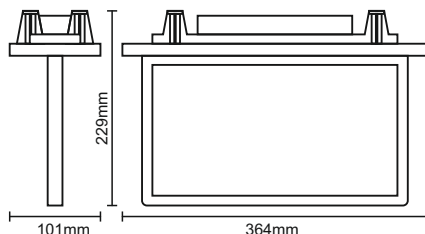



art.nr.: **LEL301**
 typ: EML03/2W/3H/6000K



1 / 10

100Lm	6000K	AC 100-240V	2W 6W	0°C +40°C	IP20	3 h	30.000	50.000 h	0% 100%	0% 100%	<1.0sec	320°	Hg free	UV free
-------	-------	-------------	-------	-----------	------	-----	--------	----------	---------	---------	---------	------	---------	---------

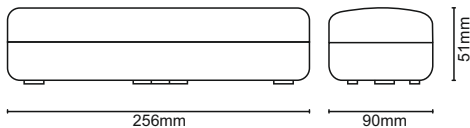



art.nr.: **LEL401**
 typ: EML04/3W/3H/6000K



1 / 30

170Lm	6000K	AC 100-240V	3W 8W	0°C +40°C	IP20	5LED	80m²	3 h	30.000	50.000 h	0% 100%	0% 100%	<1.0sec	120°
-------	-------	-------------	-------	-----------	------	------	------	-----	--------	----------	---------	---------	---------	------

12W





art.nr.: **LCL421**

tip: CLR12W/24SMD/5730/4000K

1 / 20



12W
SENSOR





art.nr.: **LCL421M**

tip: CLR12W/24SMD/5730/4000K/MS

1 / 20



12W

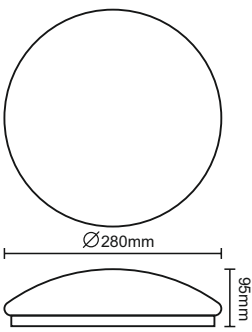

art.nr.: LCL421/44



tip: CLR12W/24SMD/5730/4000K/44



1 / 20



12W
SENSOR

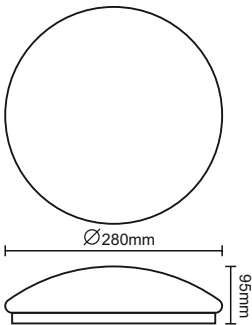

art.nr.: LCL421M/44



tip: CLR12W/24SMD/5730/4000K/MS/44



1 / 20



18W

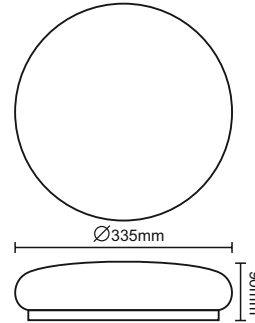

art.nr.: **LCL122A**



typ: CR1/18W/SMD/4000K/A



1 / 10



18W

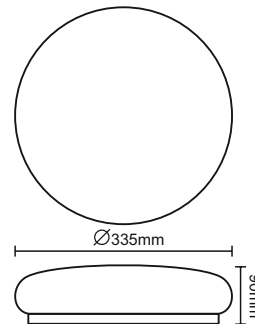

art.nr.: **LCL122B**



typ: CR1/18W/SMD/4000K/B



1 / 10



24W





art.nr.: LCL223A
typ: CR2/24W/SMD/4000K/A



1 / 10

1800 Lm	4000K	AC 170-260V	24W 170W	-15°C +45°C	IP20	Ra ≥ 80	20.000	25.000 h	0% 100%		<1.0sec	120°	Hg free	UV free
---------	-------	-------------	----------	-------------	------	---------	--------	----------	---------	--	---------	------	---------	---------

26W DIMMABLE

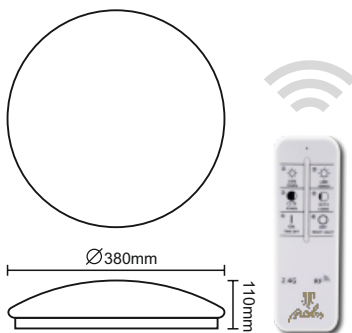



art.nr.: LCL533
typ: CLR26W/96SMD/2835/RC/AS



1 / 10

1600 Lm	2700K ~ 6500K	AC 220-240V	26W 140W	-20°C +40°C	IP20	Ra ≥ 80	25.000	30.000 h	0% 100%		<1.0sec	170°	Hg free	UV free
---------	---------------	-------------	----------	-------------	------	---------	--------	----------	---------	--	---------	------	---------	---------

65W
DIMMABLE

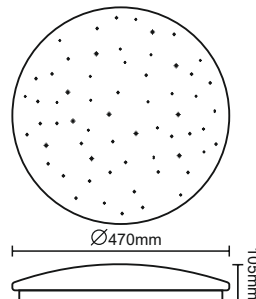

NIGHT
LIGHT

art.nr.: **LCL636**



typ: CLR65W/144SMD/IR/AS

4750 Lm	2700K ~ 6500K	AC 180-260V	65W 500W	-20 °C +40 °C	IP20	Ra=80	25.000	30.000 h	0% 100%		<1.0sec	120°	Hg free	UV free
------------	---------------------	----------------	-------------	------------------	------	-------	--------	----------	---------	--	---------	------	---------	---------

1/5



65W
DIMMABLE

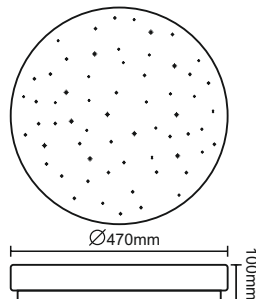

NIGHT
LIGHT

art.nr.: **LCL636T**

typ: CLT65W/144SMD/IR/AS

4750 Lm	2700K ~ 6500K	AC 180-260V	65W 500W	-20 °C +40 °C	IP20	Ra=80	25.000	30.000 h	0% 100%		<1.0sec	120°	Hg free	UV free
------------	---------------------	----------------	-------------	------------------	------	-------	--------	----------	---------	--	---------	------	---------	---------



1/5



12W

7 EXCLUSIVE

series

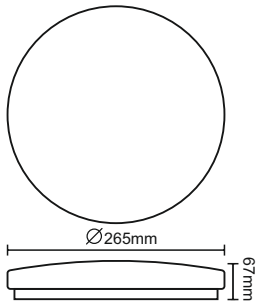

art.nr.: **LC721S**
typ: CLR4/12W/SMD/4000K





1 / 10



12W

7 EXCLUSIVE

series

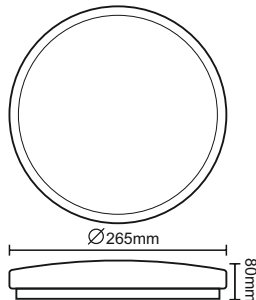


art.nr.: **LC721A/SI**
typ: CLR0/12W/SMD/4000K/SI



1 / 10




12W

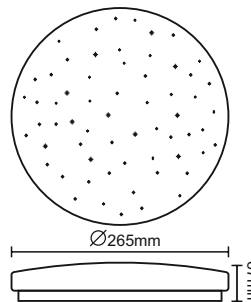

7 EXCLUSIVE

series



art.nr.: LC741S


typ: CLR4/12W/SMD/2700K/AS



1 / 10




12W

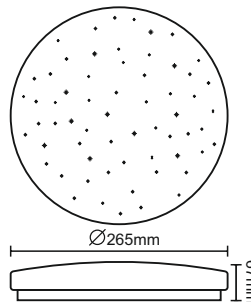

7 EXCLUSIVE

series



art.nr.: LC751S

typ: CLR4/12W/SMD/4000K/AS



1 / 10



18W

7 EXCLUSIVE


series

ENERGY LABEL: Y I/A IE IA
енергия - ενεργεια

A++
A+
A
B
C
D
E

A

18 kWh/1000h

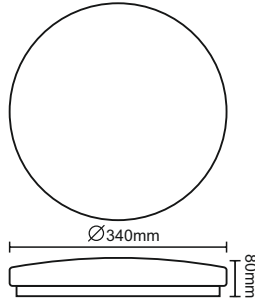

art.nr: **LC722S**
typ: CLR4/18W/SMD/4000K



1 / 10

1300 Lm 4000K AC 176-264V 18W 120W -15°C +45°C IP20 Ra ≥ 80 25.000 30.000 h 0% 100% $\lt; 1.0\text{sec}$ 120° Hg free UV free

18W

7 EXCLUSIVE


series

ENERGY LABEL: Y I/A IE IA
енергия - ενεργεια

A++
A+
A
B
C
D
E

A

18 kWh/1000h

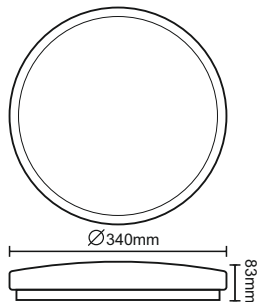


art.nr: **LC722A/SI**
typ: CLR0/18W/SMD/4000K/SI



1 / 10

1300 Lm 4000K AC 176-264V 18W 120W -15°C +45°C IP20 Ra ≥ 80 25.000 30.000 h 0% 100% $\lt; 1.0\text{sec}$ 120° Hg free UV free

24W

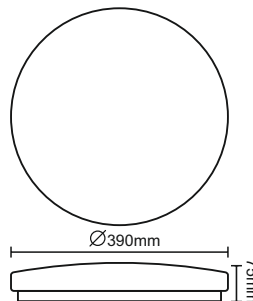

art.nr.: LC723S


tip: CLR4/24W/SMD/4000K



1/5



24W

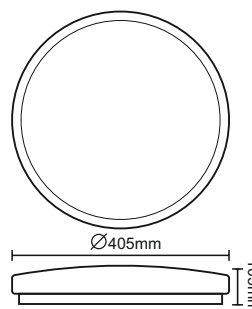

art.nr.: LC723A/SI

tip: CLR0/24W/SMD/4000K/SI





1/5



50W

7 EXCLUSIVE
★★★★★
series



art.nr: LC724S

tip: CLR4/50W/SMD/4000K





1/1



50W

7 EXCLUSIVE
★★★★★
series

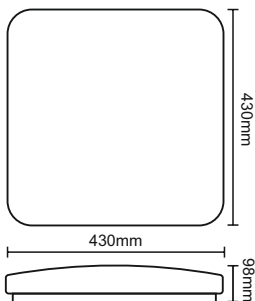

art.nr: LC724S/S


tip: CLS4/50W/SMD/4000K



1/1




50W

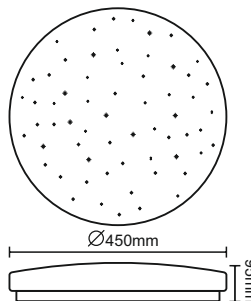

7 EXCLUSIVE

series



art.nr.: LC754S


tip: CLR4/50W/SMD/4000K/AS

3600 Lm	4000K	AC 176-264V	50W 350W	-15°C +45°C	IP20	Ra=80	25.000	30.000 h	0% 100%		<1.0sec	120°	Hg free	UV free
---------	-------	-------------	----------	-------------	------	-------	--------	----------	---------	--	---------	------	---------	---------

1/1




50W

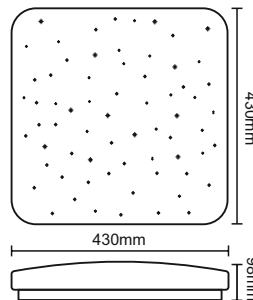

7 EXCLUSIVE

series



art.nr.: LC754S/S

tip: CLS4/50W/SMD/4000K/AS



3600 Lm	4000K	AC 176-264V	50W 350W	-15°C +45°C	IP20	Ra=80	25.000	30.000 h	0% 100%		<1.0sec	120°	Hg free	UV free
---------	-------	-------------	----------	-------------	------	-------	--------	----------	---------	--	---------	------	---------	---------

1/1



50W

7 EXCLUSIVE
★★★★★
series

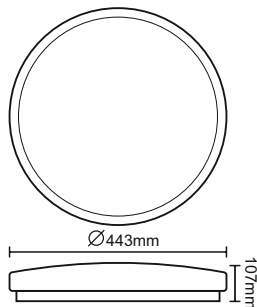

art.nr.: LC724A/SI
tup: CLR0/50W/SMD/4000K/SI





1/1

3600 Lm	4000K	AC 176-264V	50W 350W	-15°C +45°C	IP20	Ra ≥ 80	25.000	30.000 h	0% 100%	Light bulb icon with lightning bolt	<1.0sec	120°	Hg free	UV free
---------	-------	-------------	----------	-------------	------	---------	--------	----------	---------	-------------------------------------	---------	------	---------	---------

50W

7 EXCLUSIVE
★★★★★
series

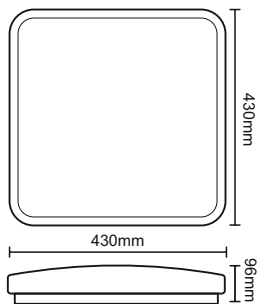



art.nr.: LC724A/SI/S
tup: CLS0/50W/SMD/4000K/SI




1/1

3600 Lm	4000K	AC 176-264V	50W 350W	-15°C +45°C	IP20	Ra ≥ 80	25.000	30.000 h	0% 100%	Light bulb icon with lightning bolt	<1.0sec	120°	Hg free	UV free
---------	-------	-------------	----------	-------------	------	---------	--------	----------	---------	-------------------------------------	---------	------	---------	---------

60W

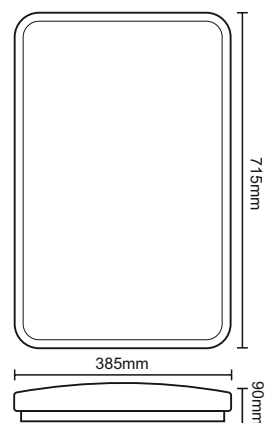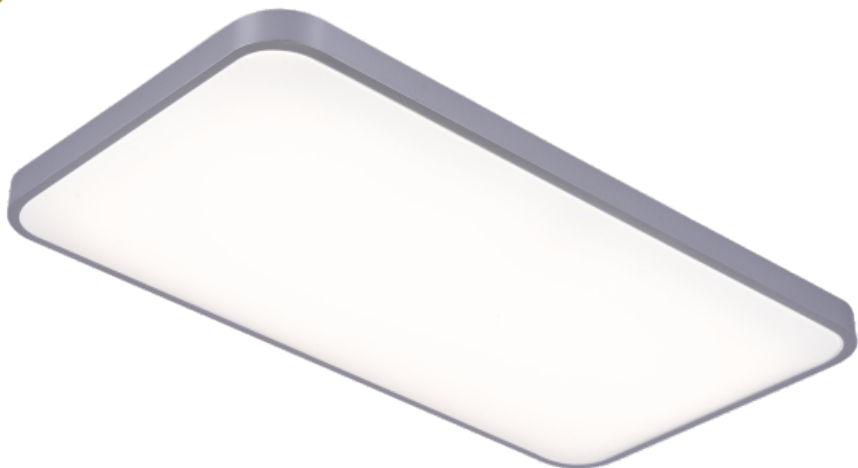

7 EXCLUSIVE series




art.nr.: LC725A/SI/R
tup: CLEO/60W/SMD/4000K/SI

4300 Lm 4000K AC 176-264V 60W 450W -15°C +45°C IP20 Ra=80 25.000 30.000 h 0% 100%


1/1



60W

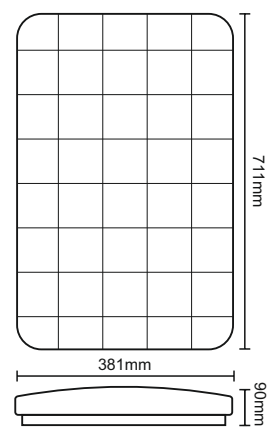

7 EXCLUSIVE series



art.nr.: LC725N/R
tup: CLE5/60W/SMD/4000K



4300 Lm 4000K AC 176-264V 60W 450W -15°C +45°C IP20 Ra=80 25.000 30.000 h 0% 100%

1/1



60W

7 EXCLUSIVE
★★★★★
series

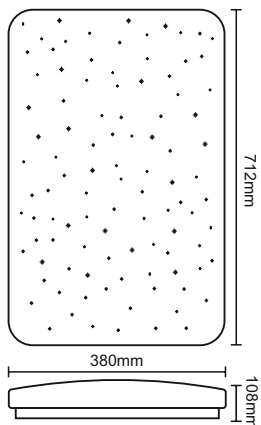

art.nr.: **LC755S/R**
tup: CLR4/60W/SMD/4000K/AS





1/1



15W
SENSOR

7 EXCLUSIVE
★★★★★
series

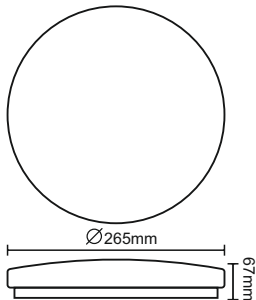

art.nr.: **LC722SM**
tup: CLR4/15W/SMD/4000K/MS



1/10




24W
DIMMABLE



NIGHT
LIGHT

art.nr.: **LC800S**
tup.: CLR4/24W/SMD/RC

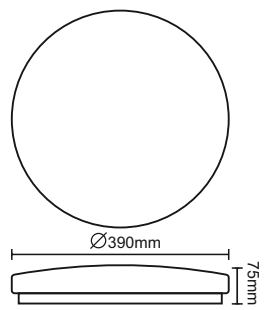

8 EXCLUSIVE

Series

ENERGY LABEL: Y UA IE IA
енергия - ενέργεια

A+ A A B C D E

A

24 kWh/1000h

1800 Lm | 2700K ~6500K | AC 176-264V | 24W 170W | -15°C +45°C | IP20 | Ra=80 | 25.000 | 30.000 h | 0% 100% | | <1.0sec | 120° | Hg free | UV free

1/5


8 585040 904119

24W
DIMMABLE



NIGHT
LIGHT

art.nr.: **LC800A/SI**
tup.: CLR0/24W/RC/SI

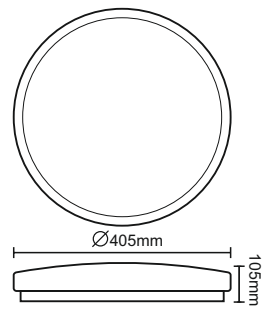

8 EXCLUSIVE

Series

ENERGY LABEL: Y UA IE IA
енергия - ενέργεια

A+ A A B C D E

A

24 kWh/1000h

1800 Lm | 2700K ~6500K | AC 176-264V | 24W 170W | -15°C +45°C | IP20 | Ra=80 | 25.000 | 30.000 h | 0% 100% | | <1.0sec | 120° | Hg free | UV free

1/5

8 585040 900647

24W
DIMMABLE





NIGHT
LIGHT

art.nr.: **LC800P**
tup: CLR6/24W/SMD/RC

8 EXCLUSIVE

series

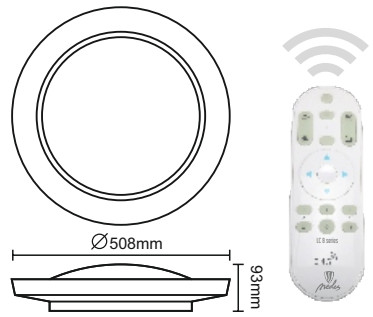

1/1

1800
Lm

2700K
6500K

AC
176-264V

24W
170W

-15°C
+45°C

IP20

Ra ≥ 80

25.000

30.000 h

0% 100%



<1.0sec

120°

Hg free

UV free

50W
DIMMABLE





NIGHT
LIGHT

art.nr.: **LC801L**
tup: CLR7/50W/SMD/RC

8 EXCLUSIVE

series

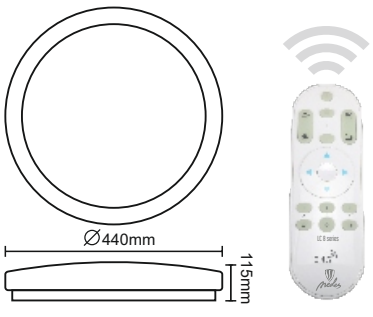

1/1

3600
Lm

2700K
6500K

AC
176-264V

50W
350W

-15°C
+45°C

IP20

Ra ≥ 80

25.000

30.000 h

0% 100%



<1.0sec

120°

Hg free

UV free

50W
DIMMABLE



NIGHT
LIGHT

art.nr.: LC801S

tup: CLR4/50W/SMD/RC

3600 Lm	2700K ~ 6500K	AC 176-264V	50W 350W	-15°C +45°C	IP20	Ra=80	25.000	30.000 h	0% 100%		<1.0sec	120°	Hg free	UV free
---------	---------------	-------------	----------	-------------	------	-------	--------	----------	---------	--	---------	------	---------	---------

1/1



8 EXCLUSIVE SERIES

ENERGY LABEL: A

50 kWh/1000h



50W
DIMMABLE



NIGHT
LIGHT

art.nr.: LC801S/S

tup: CLS4/50W/SMD/RC

3600 Lm	2700K ~ 6500K	AC 176-264V	50W 350W	-15°C +45°C	IP20	Ra=80	25.000	30.000 h	0% 100%		<1.0sec	120°	Hg free	UV free
---------	---------------	-------------	----------	-------------	------	-------	--------	----------	---------	--	---------	------	---------	---------

1/1



8 EXCLUSIVE SERIES




ENERGY LABEL: A

50 kWh/1000h



50W
DIMMABLE

8 EXCLUSIVE
series



NIGHT
LIGHT

art.nr: LC811S

tup: CLR4/50W/SMD/RC/AS



3600
Lm

2700K
6500K

AC
176-264V

50W
350W

-15°C
+45°C

IP20

Ra ≥ 80

25.000

30.000 h

0% 100%



<1.0sec




120°

Hg free

UV free

50W
DIMMABLE

8 EXCLUSIVE
series



NIGHT
LIGHT

art.nr: LC811S/S

tup: CLS4/50W/SMD/RC/AS



3600
Lm

2700K
6500K

AC
176-264V

50W
350W

-15°C
+45°C

IP20

Ra ≥ 80

25.000

30.000 h

0% 100%



<1.0sec

120°

Hg free

UV free

50W
DIMMABLE



NIGHT
LIGHT

art.nr.: LC811W

typ: CLR1/50W/SMD/RC/AS

3600 Lm	2700K ~ 6500K	AC 176-264V	50W 350W	-15°C +45°C	IP20	Ra=80	25.000	30.000 h	0% 100%		<1.0sec	120°	Hg free	UV free
------------	---------------------	----------------	-------------	----------------	------	-------	--------	----------	---------	--	---------	------	---------	---------

1/1



8 EXCLUSIVE

Series

ENERGY LABEL

Y UA IE IA
енергия - ενέργεια

A+
A+
A
B
C
D
E

A

50 kWh/1000h



50W
DIMMABLE



NIGHT
LIGHT

art.nr.: LC811W/S

typ: CLS1/50W/SMD/RC/AS

3600 Lm	2700K ~ 6500K	AC 176-264V	50W 350W	-15°C +45°C	IP20	Ra=80	25.000	30.000 h	0% 100%		<1.0sec	120°	Hg free	UV free
------------	---------------------	----------------	-------------	----------------	------	-------	--------	----------	---------	--	---------	------	---------	---------

1/1



8 EXCLUSIVE

Series

ENERGY LABEL

Y UA IE IA
енергия - ενέργεια

A+
A+
A
B
C
D
E

A


50 kWh/1000h




50W
DIMMABLE

NIGHT
LIGHT

art.nr.: LC801A/SI
typ: CLRO/50W/SMD/RC/SI

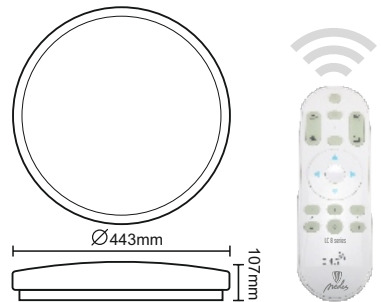

8 EXCLUSIVE
series



3600
Lm

2700K
6500K

AC
176-264V

50W
350W

-15°C
+45°C

IP20

Ra ≥ 80

25.000

30.000 h

0% 100%




<1.0sec

120°

Hg free

UV free

8 EXCLUSIVE
series



3600
Lm

2700K
6500K

AC
176-264V

50W
350W

-15°C
+45°C

IP20

Ra ≥ 80

25.000

30.000 h

0% 100%




<1.0sec

120°

Hg free

UV free

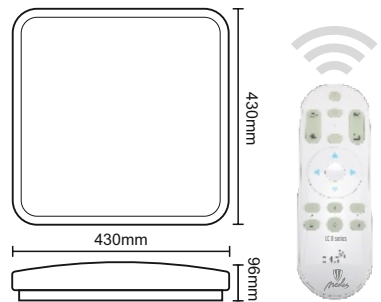

NIGHT
LIGHT

art.nr.: LC801A/SI/S
typ: CLSO/50W/SMD/RC/SI

50W
DIMMABLE

50W
DIMMABLE




NIGHT
LIGHT

art.nr.: LC801A/GD
tup: CLRO/50W/SMD/RC/GD



8 EXCLUSIVE

series



- 3600 Lm
- 2700K ~ 6500K
- AC 176-264V
- 50W / 350W
- 15°C / +45°C
- IP20
- Ra=80
- 25.000
- 30.000 h
- 0% 100%
- Light bulb icon with lightning bolt
- <1.0sec
- 120°
- Hg free
- UV free




50W
DIMMABLE




NIGHT
LIGHT

art.nr.: LC801A/GD/S
tup: CLSO/50W/SMD/RC/GD

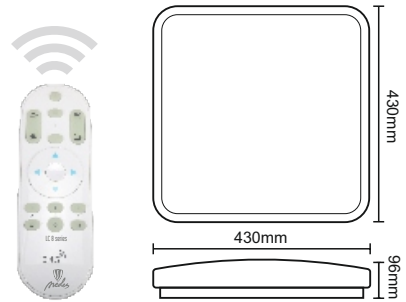

8 EXCLUSIVE

series





- 3600 Lm
- 2700K ~ 6500K
- AC 176-264V
- 50W / 350W
- 15°C / +45°C
- IP20
- Ra=80
- 25.000
- 30.000 h
- 0% 100%
- Light bulb icon with lightning bolt
- <1.0sec
- 120°
- Hg free
- UV free



50W
DIMMABLE

8 EXCLUSIVE

series



Ø443mm
107mm



NIGHT
LIGHT

art.nr.: LC811A/BK
tup: CLRO/50W/SMD/RC/BK/AS



1/1

3600
Lm

2700K
~
6500K

AC
176-264V

50W
350W

-15°C
+45°C

IP20

Ra ≥ 80

25.000

30.000 h

0% 100%



<1.0sec

120°



Hg free

UV free

50W
DIMMABLE

8 EXCLUSIVE

series



430mm
430mm
96mm



NIGHT
LIGHT

art.nr.: LC811A/BK/S
tup: CLSO/50W/SMD/RC/BK/AS



1/1

3600
Lm

2700K
~
6500K

AC
176-264V

50W
350W

-15°C
+45°C

IP20

Ra ≥ 80

25.000

30.000 h

0% 100%



<1.0sec

120°


Hg free

UV free

50W
DIMMABLE



NIGHT
LIGHT

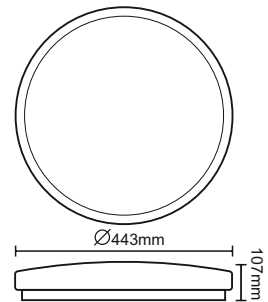

8 EXCLUSIVE

series

ENERGY LABEL: Y UA IE IA
енергия - ενέργεια

A+
A
A
B
C
D
E

A

50 kWh/1000h

art.nr.: **LC801A/BCH**
tup: CLR0/50W/SMD/RC/BCH

3600 Lm | 2700K ~ 6500K | AC 176-264V | 50W 350W | -15°C +45°C | IP20 | Ra=80 | 25.000 | 30.000 h | 0% 100% | | | <1.0sec | 120° | Hg free | UV free


1/1

8 585040 903822

50W
DIMMABLE



NIGHT
LIGHT

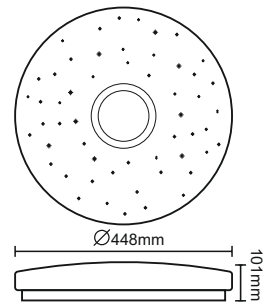

8 EXCLUSIVE

series

ENERGY LABEL: Y UA IE IA
енергия - ενέργεια

A+
A
A
B
C
D
E

A

50 kWh/1000h

art.nr.: **LC811U**
tup: CLR2/50W/SMD/RC/AS

3600 Lm | 2700K ~ 6500K | AC 176-264V | 50W 350W | -15°C +45°C | IP20 | Ra=80 | 25.000 | 30.000 h | 0% 100% | | | <1.0sec | 120° | Hg free | UV free

1/1


8 585040 903822

50W
DIMMABLE

NIGHT
LIGHT


art.nr: **LC811D**

tup: CLR3/50W/SMD/RC/AS

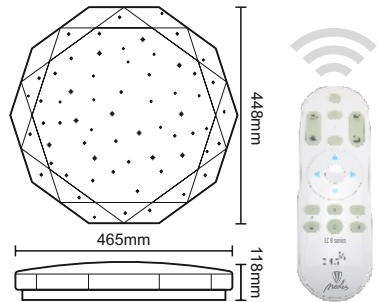

8 EXCLUSIVE

Series




- 3600 Lm
- 2700K ~ 6500K
- AC 176-264V
- 50W 350W
- 15°C ~ +45°C
- IP20
- Ra ≥ 80
- 25.000
- 30.000 h
- 0% 100%
- Light bulb icon with a slash
- <1.0sec
- 120°
- Hg free
- UV free

60W
DIMMABLE

NIGHT
LIGHT


art.nr: **LC812U**

tup: CLR2/60W/SMD/RC/AS

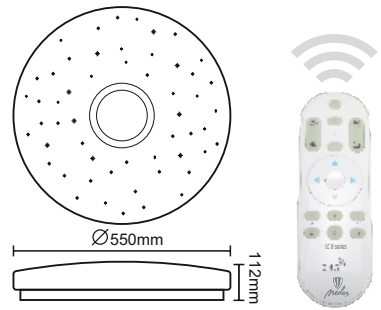

8 EXCLUSIVE

Series



- 4300 Lm
- 2700K ~ 6500K
- AC 176-264V
- 90W 450W
- 15°C ~ +45°C
- IP20
- Ra ≥ 80
- 25.000
- 30.000 h
- 0% 100%
- Light bulb icon with a slash
- <1.0sec
- 120°
- Hg free
- UV free

60W
DIMMABLE




NIGHT LIGHT

art.nr.: **LC802K**

typ: CLR5/60W/SMD/RC

4300 Lm	2700K ~ 6500K	AC 176-264V	60W / 450W	-15°C ~ +45°C	IP20	Ra=80	25.000	30.000 h	0% 100%		<1.0sec	120°	Hg free	UV free
---------	---------------	-------------	------------	---------------	------	-------	--------	----------	---------	--	---------	------	---------	---------

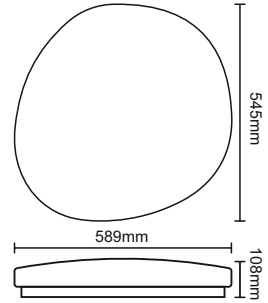

8 EXCLUSIVE

series

ENERGY LABEL: Y UA IE IA
енергия - ενέργεια

A++
A+
A
B
C
D
E

A

60 kWh/1000h

1/1

8 585040 903167

90W
DIMMABLE




NIGHT LIGHT

art.nr.: **LC803S**

typ: CLR4/90W/SMD/RC

6500 Lm	2700K ~ 6500K	AC 176-264V	90W / 650W	-15°C ~ +45°C	IP20	Ra=80	25.000	30.000 h	0% 100%		<1.0sec	120°	Hg free	UV free
---------	---------------	-------------	------------	---------------	------	-------	--------	----------	---------	--	---------	------	---------	---------

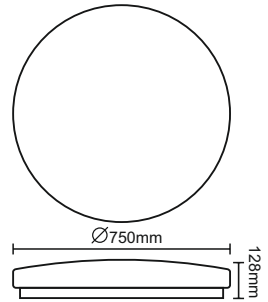

8 EXCLUSIVE

series

ENERGY LABEL: Y UA IE IA
енергия - ενέργεια

A++
A+
A
B
C
D
E

A

90 kWh/1000h



1/1

8 585040 903853

90W
DIMMABLE

8 EXCLUSIVE

series

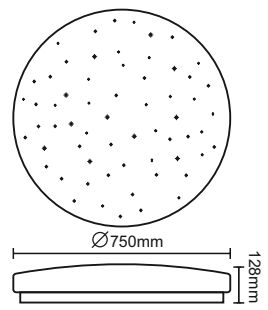

NIGHT
LIGHT

art.nr: LC813S
typ: CLR4/90W/SMD/RC/AS





- 6500 Lm
- 2700K ~ 6500K
- AC 176-264V
- 90W 650W
- 15°C ~ +45°C
- IP20
- Ra ≥ 80
- 25.000
- 30.000 h
- 0% 100%
- Light bulb icon with lightning bolt
- <1.0sec
- 120°
- Hg free
- UV free

150W
DIMMABLE

8 EXCLUSIVE

series

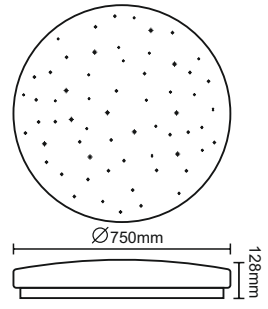

NIGHT
LIGHT

art.nr: LC814S
typ: CLR4/150W/SMD/RC/AS



- 10800 Lm
- 2700K ~ 6500K
- AC 176-264V
- 150W 1000W
- 15°C ~ +45°C
- IP20
- Ra ≥ 80
- 25.000
- 30.000 h
- 0% 100%
- Light bulb icon with lightning bolt
- <1.0sec
- 120°
- Hg free
- UV free

7W




art.nr.: **LDL153**

tip: DR01/7W/SMD/4000K/WH

600 Lm	4000K	AC 180-265V	7W 65W	-15°C +55°C	IP44	Ra=80	20.000	30.000 h	0% 100%	Light bulb icon	<1.0sec	120°	Hg free	UV free
--------	-------	-------------	--------	-------------	------	-------	--------	----------	---------	-----------------	---------	------	---------	---------

1 / 100



7W






art.nr.: **LDL153/S**


tip: DR01/7W/SMD/4000K/SI

600 Lm	4000K	AC 180-265V	7W 65W	-15°C +55°C	IP44	Ra=80	20.000	30.000 h	0% 100%	Light bulb icon	<1.0sec	120°	Hg free	UV free
--------	-------	-------------	--------	-------------	------	-------	--------	----------	---------	-----------------	---------	------	---------	---------

1 / 100

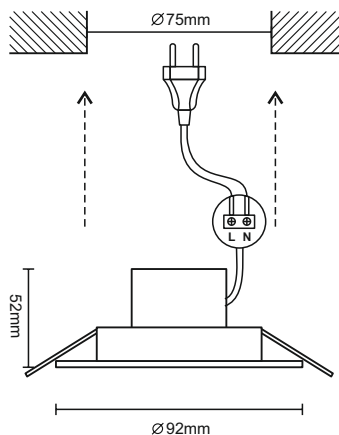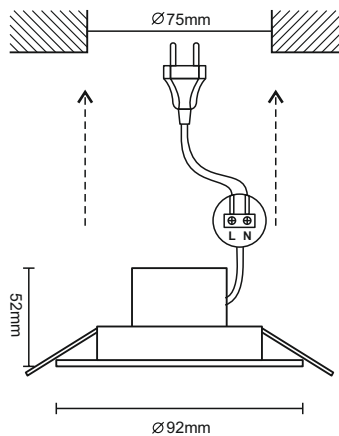


7W

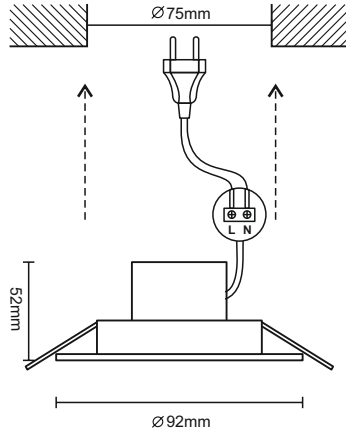

V0

art.nr.: **LDL143**


typ: DR01/7W/SMD/3000K/WH



1 / 100

590 Lm	3000K	AC 180-265V	7W 60W	-15°C +55°C	IP44	Ra ≥ 80	20.000	30.000 h	0% 100%		<1.0sec	120°	Hg free	UV free
--------	-------	-------------	--------	-------------	------	---------	--------	----------	---------	--	---------	------	---------	---------


7W

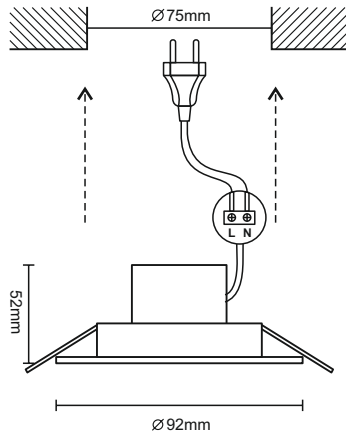

V0

art.nr.: **LDL143/S**

typ: DR01/7W/SMD/3000K/SI



1 / 100

590 Lm	3000K	AC 180-265V	7W 60W	-15°C +55°C	IP44	Ra ≥ 80	20.000	30.000 h	0% 100%		<1.0sec	120°	Hg free	UV free
--------	-------	-------------	--------	-------------	------	---------	--------	----------	---------	--	---------	------	---------	---------

10W




art.nr.: **LDL154**

typ: DR01/10W/SMD/4000K/WH

850 Lm	4000K	AC 180-265V	10W 75W	-15°C +55°C	IP44	Ra≥80	20.000	30.000 h	0% 100%	Light bulb icon	<1.0sec	120°	Hg free	UV free
--------	-------	-------------	---------	-------------	------	-------	--------	----------	---------	-----------------	---------	------	---------	---------

1 / 50



10W






art.nr.: **LDL154/S**



typ: DR01/10W/SMD/4000K/SI

850 Lm	4000K	AC 180-265V	10W 75W	-15°C +55°C	IP44	Ra≥80	20.000	30.000 h	0% 100%	Light bulb icon	<1.0sec	120°	Hg free	UV free
--------	-------	-------------	---------	-------------	------	-------	--------	----------	---------	-----------------	---------	------	---------	---------

1 / 50

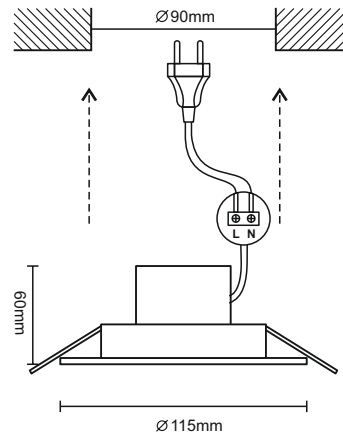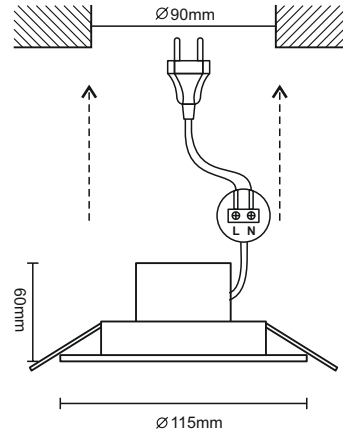

7W

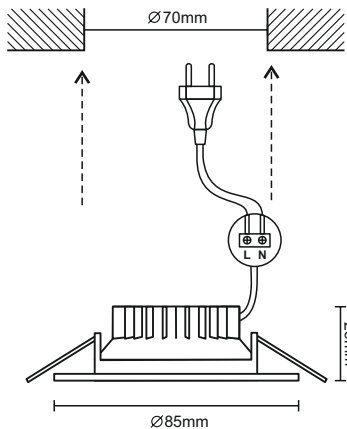

art.nr.: LDL253



tup: DR02/7W/SMD/4000K/WH



1 / 100



7W

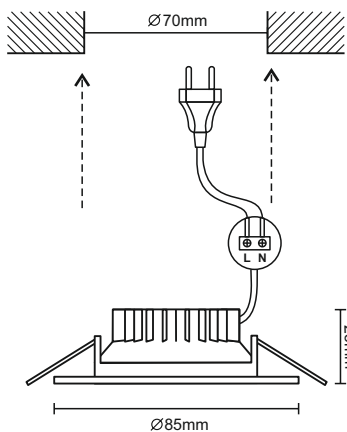

art.nr.: LDL253/S


tup: DR02/7W/SMD/4000K/SI



1 / 100



9W

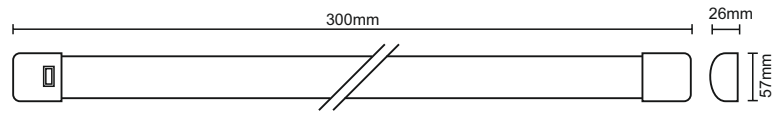

art.nr.: LNL121/1

tup: WTL9W/1/300/2835/4000K

900 Lm | 4000K | AC 180-265V | 9W 80W | -25°C +65°C | IP40 | IK08 | 30.000 | 35.000 h | 0% 100% | | <1.0sec | 180° | Hg free | UV free


1/50



ENERGY LABEL: A+ (9 kWh/1000h)



18W

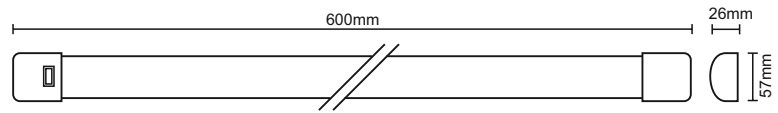

art.nr.: LNL122/1

tup: WTL18W/1/600/2835/4000K

1850 Lm | 4000K | AC 180-265V | 18W 150W | -25°C +65°C | IP40 | IK08 | 30.000 | 35.000 h | 0% 100% | | <1.0sec | 180° | Hg free | UV free


1/50



ENERGY LABEL: A+ (18 kWh/1000h)



20W DIMMABLE

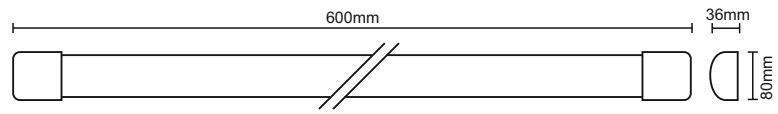

art.nr.: LNL122/3

tup: WTL20W/3/600/2835/4000K

2000 Lm | 4000K | AC 180-265V | 20W 150W | -25°C +65°C | IP40 | IK08 | 30.000 | 35.000 h | 0% 100% | | <1.0sec | 180° | Hg free | UV free



1/25



ENERGY LABEL: A+ (20 kWh/1000h)



36W

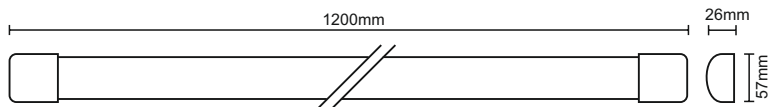

art.nr.: LNL123/1



typ: WTL36W/1/1200/2835/4000K



1 / 50

3500 Lm	4000K	AC 180-265V	36W 270W	-25°C +65°C	IP40	IK08	30.000	35.000 h	0% 100%		<1.0sec	180°	Hg free	UV free
---------	-------	-------------	----------	-------------	------	------	--------	----------	---------	--	---------	------	---------	---------

40W

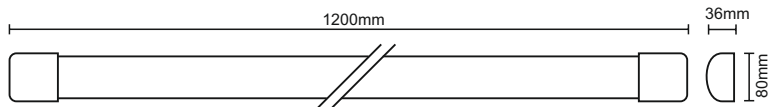

art.nr.: LNL124



typ: WTL40W/1200/2835/4000K



1 / 25

3900 Lm	4000K	AC 180-265V	40W 300W	-25°C +65°C	IP40	IK08	30.000	35.000 h	0% 100%		<1.0sec	180°	Hg free	UV free
---------	-------	-------------	----------	-------------	------	------	--------	----------	---------	--	---------	------	---------	---------

10W

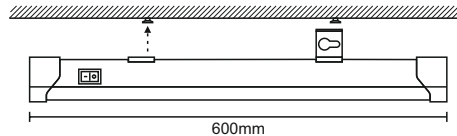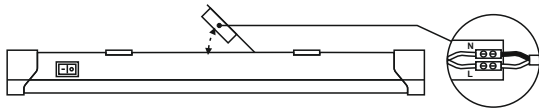


art.nr.: LNL922



tip: BL10W/600/2835/4000K

1000 Lm	4000K	AC 175-265V	10W 75W	-5°C +45°C	IP20	Ra=80	25.000	30.000 h	0% 100%		<1.0sec	160°	Hg free	UV free
---------	-------	-------------	---------	------------	------	-------	--------	----------	---------	--	---------	------	---------	---------

1 / 20



15W

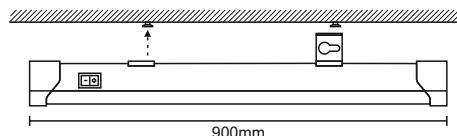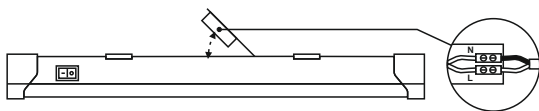


art.nr.: LNL923




tip: BL15W/900/2835/4000K

1300 Lm	4000K	AC 175-265V	15W 120W	-5°C +45°C	IP20	Ra=80	25.000	30.000 h	0% 100%		<1.0sec	160°	Hg free	UV free
---------	-------	-------------	----------	------------	------	-------	--------	----------	---------	--	---------	------	---------	---------

1 / 20



9W

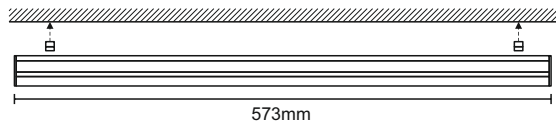

art.nr.: LNL822




tup: T5/9W/600/2835/4000K



1/25

1000 Lm	4000K	AC 175-265V	9W 75W	-5°C +45°C	IP20	Ra ≥ 80	25.000	30.000 h	0% 100%	UV free	<1.0sec	180°	Hg free	UV free
---------	-------	-------------	--------	------------	------	---------	--------	----------	---------	---------	---------	------	---------	---------

12W

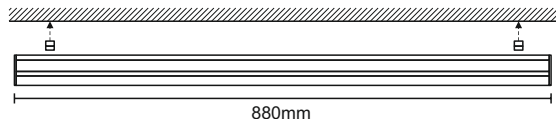

art.nr.: LNL823

tup: T5/12W/900/2835/4000K



1/25

1250 Lm	4000K	AC 175-265V	12W 100W	-5°C +45°C	IP20	Ra ≥ 80	25.000	30.000 h	0% 100%	UV free	<1.0sec	180°	Hg free	UV free
---------	-------	-------------	----------	------------	------	---------	--------	----------	---------	---------	---------	------	---------	---------

ACCESS



art.nr.: WLF201

tup: VDE1M/0/1



1/500

AC 250V	IP20	1m	2x 0.5mm	350W 1.5A
---------	------	----	----------	-----------



art.nr.: WLF211


tup: VDE15CM/1/1



1/500

AC 250V	IP20	15cm	2x 0.5mm	350W 1.5A
---------	------	------	----------	-----------

15W




art.nr.: LNL7121/WH


tup: LB01/15W/600/SMD/4000K/WH

1400 Lm 4000K AC 180-265V 15W 120W -20°C +45°C IP44 IK08 15.000 30.000 h 0% 100% <1.0sec 180° Hg free UV free

1/50



15W




art.nr.: LNL7121/SI


tup: LB01/15W/600/SMD/4000K/SI

1400 Lm 4000K AC 180-265V 15W 120W -20°C +45°C IP44 IK08 15.000 30.000 h 0% 100% <1.0sec 180° Hg free UV free

1/50



15W




art.nr.: LNL7221/SI



tup: LB11/15W/600/SMD/4000K/SI

1400 Lm 4000K AC 180-265V 15W 120W -20°C +45°C IP44 IK08 15.000 30.000 h 0% 100% <1.0sec 180° Hg free UV free

1/50



15W



art.nr.: LNL7321/SI



tup: LB02/15W/600/SMD/4000K/SI



1 / 50

1400 Lm	4000K	AC 180-265V	15W 120W	-20°C +45°C	IP44	IK08	15.000	30.000 h	0% 100%	Waterproof	<1.0sec	120°	Hg free	UV free
---------	-------	-------------	----------	-------------	------	------	--------	----------	---------	------------	---------	------	---------	---------

15W



art.nr.: LNL7421/WH



tup: LB03/15W/600/SMD/4000K/WH



1 / 50

1400 Lm	4000K	AC 180-265V	15W 120W	-20°C +45°C	IP44	IK08	15.000	30.000 h	0% 100%	Waterproof	<1.0sec	180°	Hg free	UV free
---------	-------	-------------	----------	-------------	------	------	--------	----------	---------	------------	---------	------	---------	---------

15W



art.nr.: LNL7521/CH


tup: LB04/15W/600/SMD/4000K/CH



1 / 50

1400 Lm	4000K	AC 180-265V	15W 120W	-20°C +45°C	IP44	IK08	15.000	30.000 h	0% 100%	Waterproof	<1.0sec	180°	Hg free	UV free
---------	-------	-------------	----------	-------------	------	------	--------	----------	---------	------------	---------	------	---------	---------

36W

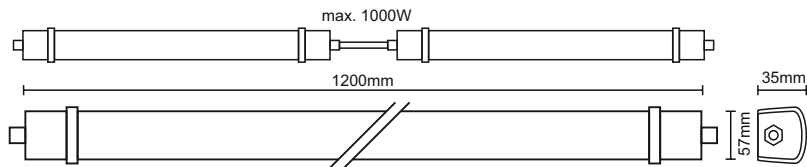


art.nr.: LNL323/1


typ: LW36W/1/1200/2835/4000K

3500 Lm	4000K	AC 180-265V	36W 270W	-25°C +65°C	IP65	IK08	30.000	35.000 h	0% 100%	Light bulb icon	<1.0sec	180°	Hg free	UV free
---------	-------	-------------	----------	-------------	------	------	--------	----------	---------	-----------------	---------	------	---------	---------

1 / 50



40W

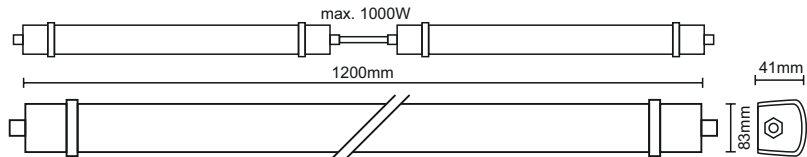


art.nr.: LNL323/2

typ: LW40W/2/1200/2835/4000K



3850 Lm	4000K	AC 180-265V	40W 300W	-25°C +65°C	IP65	IK08	30.000	35.000 h	0% 100%	Light bulb icon	<1.0sec	180°	Hg free	UV free
---------	-------	-------------	----------	-------------	------	------	--------	----------	---------	-----------------	---------	------	---------	---------

1 / 25



40W

EOKE
DRIVER

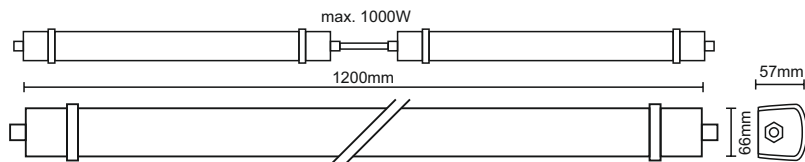

art.nr.: **LNL324/3**

typ: LW40W/3/1200/2835/4000K





1 / 25

5800 Lm	4000K	AC 180-265V	40W 450W	-25°C +65°C	IP65	IK08	30.000	50.000 h	0% 100%	UV free	Hg free	<1.0sec	180°
---------	-------	-------------	----------	-------------	------	------	--------	----------	---------	---------	---------	---------	------

50W

EOKE
DRIVER

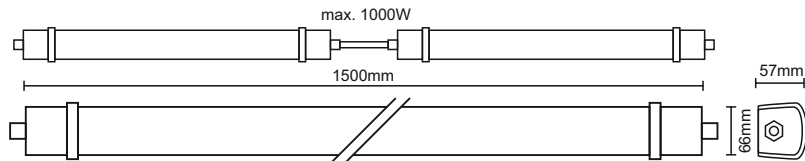

art.nr.: **LNL325/3**

typ: LW50W/3/1500/2835/4000K




1 / 25

6500 Lm	4000K	AC 180-265V	50W 560W	-25°C +65°C	IP65	IK08	30.000	50.000 h	0% 100%	UV free	Hg free	<1.0sec	180°
---------	-------	-------------	----------	-------------	------	------	--------	----------	---------	---------	---------	---------	------


40W
LED EMERGENCY 5W



art.nr.: **LNL324/3E**
tvp: LW40W/3/1200/2835/4000K/E

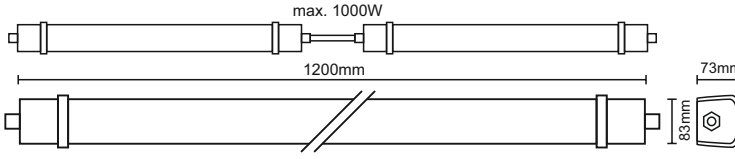

EOKE
DRIVER




5800 Lm	4000K	AC 180-265V	40W / 450W	-25°C / +65°C	IP65	IK08	30.000	50.000 h	0% / 100%	Waterproof	<1.0sec	180°	Hg free	UV free
---------	-------	-------------	------------	---------------	------	------	--------	----------	-----------	------------	---------	------	---------	---------




40W
SENSOR 5.8GHz



art.nr.: **LNL324/3S**
tvp: LW40W/3/1200/2835/4000K/MS

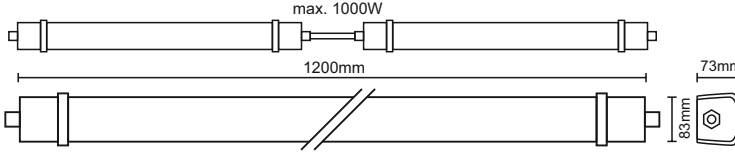

EOKE
DRIVER




5800 Lm	4000K	AC 180-265V	40W / 450W	-25°C / +65°C	IP65	IK08	30.000	50.000 h	0% / 100%	Waterproof	<1.0sec	180°	Hg free	UV free
---------	-------	-------------	------------	---------------	------	------	--------	----------	-----------	------------	---------	------	---------	---------




40W



art.nr.: **LNL423**
tvp: LW40W/1200/2835/4000K



EOKE
DRIVER




5400 Lm	4000K	AC 180-265V	40W / 450W	-25°C / +65°C	IP69K	IK10	30.000	50.000 h	0% / 100%	Waterproof	<1.0sec	180°	Hg free	UV free
---------	-------	-------------	------------	---------------	-------	------	--------	----------	-----------	------------	---------	------	---------	---------



ACCESS
REMOTE-CONTROLLER

art.nr.: RLNL324



USED FOR:
LNL324/3S



1 / 100

8 585040 904607

ACCESS
HANGING

art.nr.: SNN250
typ: SNH2500mm



1 / 100

8 585040 902696

ACCESS
CLIPS

art.nr.: SNR180
typ: SR180/2




1 / 100

8 585040 902702

5W
DIMMABLE

HAZEL

art.nr.: DL1201/W

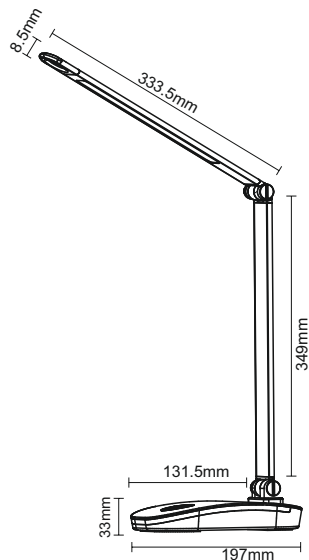

- 350 Lm
- 4000K
- AC 100-240V
- IP20
- Ra ≥ 80
- CHARGING
- 1.4m
- 20.000
- 30.000 h
- DIMMABLE
- UV free
- Hg free
- <1.0sec



1/12



5W
DIMMABLE

LISA

art.nr.: DL1202/W

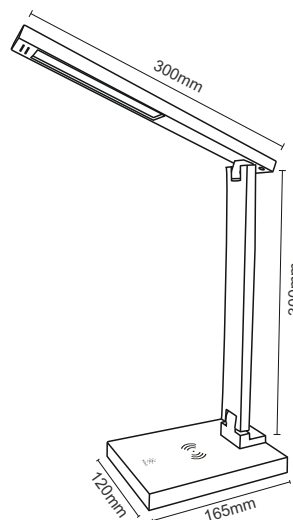


- 300 Lm
- 4000K
- AC 100-240V
- IP20
- Ra ≥ 80
- CHARGING
- CHARGING
- 1.4m
- 20.000
- 30.000 h
- DIMMABLE
- UV free
- Hg free
- <1.0sec

1/12




8W

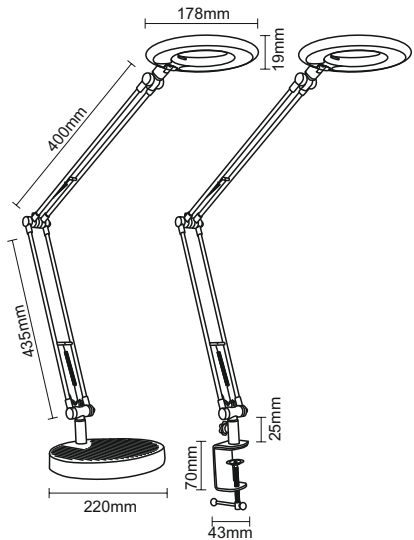

BIANCA


art.nr.: DL1203/B



1/4


- 400 Lm
- 4000K
- AC 100-240V
- IP20
- Ra ≥ 80
- 1.4m
- 20.000
- 30.000 h
- DIMMABLE
- UV free
- Hg free
- <1.0sec
- 0.1m

5W
DIMMABLE

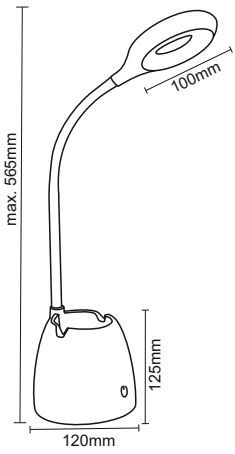

ALEXA



art.nr.: DL1204/W



1/12

- 250 Lm
- 4000K
- AC 100-240V
- IP20
- Ra ≥ 80
- 1.0m
- 20.000
- 30.000 h
- DIMMABLE
- UV free
- Hg free
- <1.0sec
- 0.1m

5W
DIMMABLE

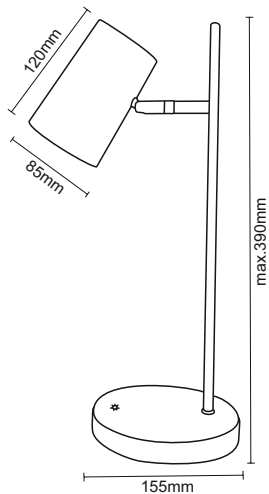

ALICE



art.nr.: DL1205/B



1/6



5W
DIMMABLE

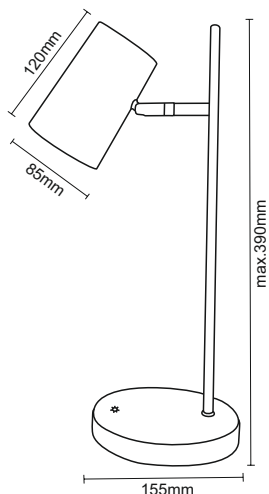

ALICE



art.nr.: DL1205/W



1/6



8W
DIMMABLE

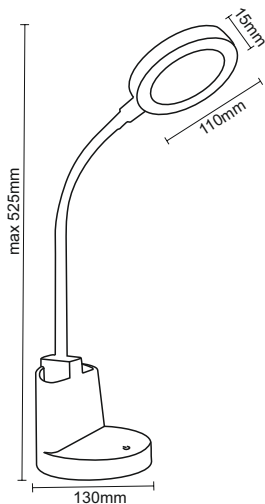

ANABEL



art.nr.: DL1206/W



1/12



5W
DIMMABLE

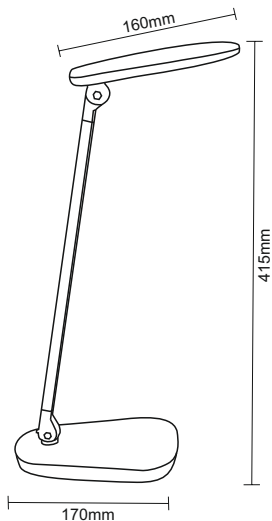

AMY

art.nr.: DL1207/W





1/12



5W
DIMMABLE

ABBY

art.nr.: DL1208/B

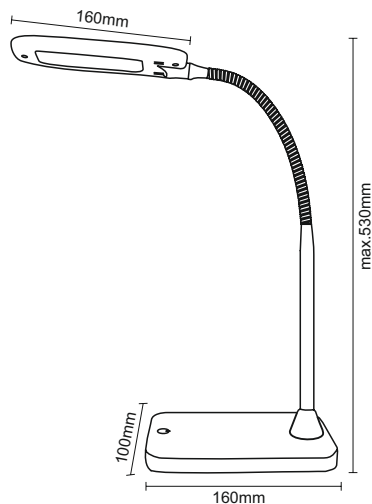



1/12



5W
DIMMABLE

ABBY



art.nr.: DL1208/W

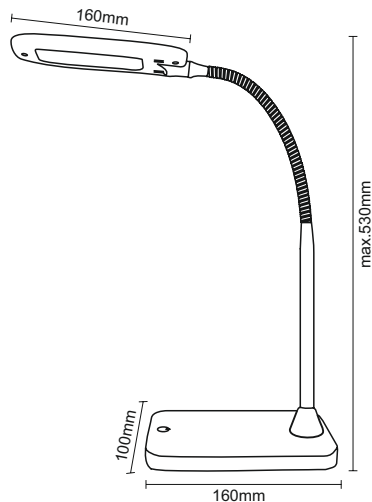

1/12



6W
DIMMABLE

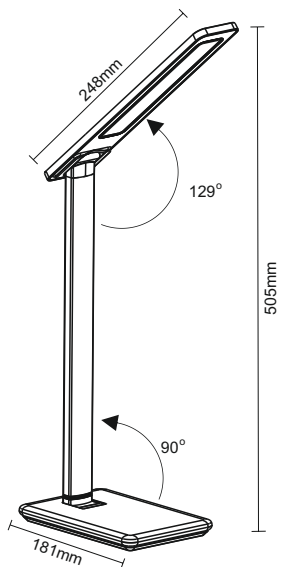



JOY

art.nr.: DL2301/B



1/10

- 200 Lm
- 3000K ~ 6500K
- AC 100-240V
- IP20
- CHARGING
- CHARGING
- AUTO OFF
- 1.0m
- 20.000
- 30.000 h
- DIMMABLE
- Hg free
- UV free

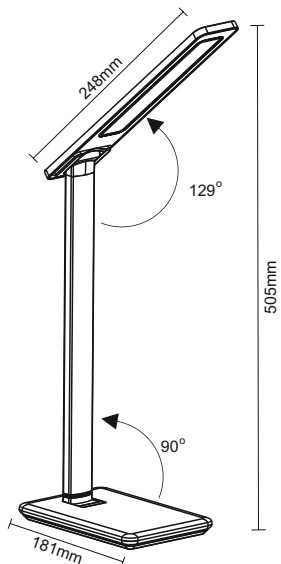

JOY

art.nr.: DL2301/W



1/10



- 200 Lm
- 3000K ~ 6500K
- AC 100-240V
- IP20
- CHARGING
- CHARGING
- AUTO OFF
- 1.0m
- 20.000
- 30.000 h
- DIMMABLE
- Hg free
- UV free

6W
DIMMABLE

7W
DIMMABLE

EMILY

art.nr.: DL3401/W

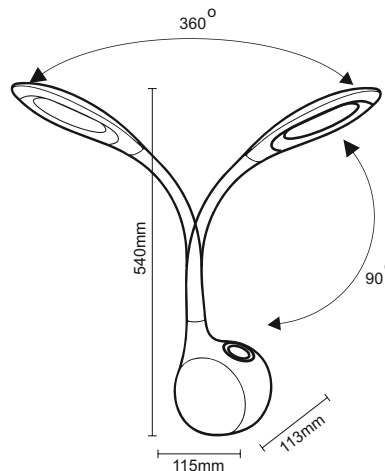

- 250 Lm
- 4000K
- RGB
- AC 100-240V
- IP20
- Ra ≥ 80
- 1.4m
- 20.000
- 30.000 h
- DIMMABLE
- Mercury-free
- <1.0sec
- 0.1m
- Hg free
- UV free



1/12



6W
DIMMABLE

CYNTHIA

art.nr.: DL3202/B


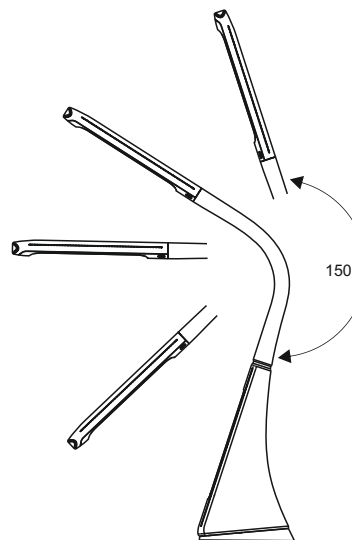


- 300 Lm
- 5500K
- AC 100-240V
- IP20
- TEMPER.
- ALARM
- TIME
- 1.4m
- 20.000
- 30.000 h
- DIMMABLE
- Mercury-free
- <1.0sec
- Hg free
- UV free

1/12



9W
DIMMABLE

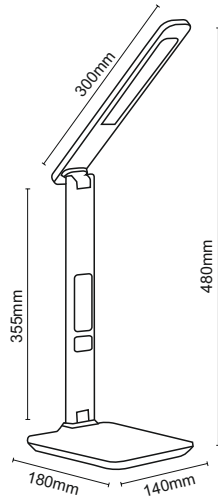



DAKOTA

art.nr.: DL3303/B



1 / 12

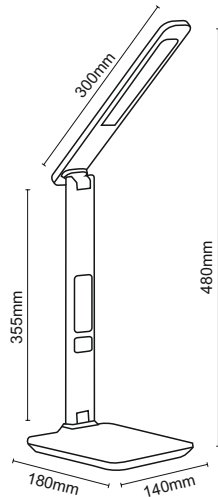

DAKOTA

art.nr.: DL3303/W





1 / 12



8W
DIMMABLE

MEGGIE

art.nr.: DL3304/B

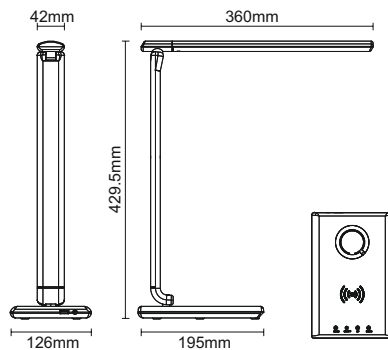



1/12



8W
DIMMABLE

MEGGIE



art.nr.: DL3304/W

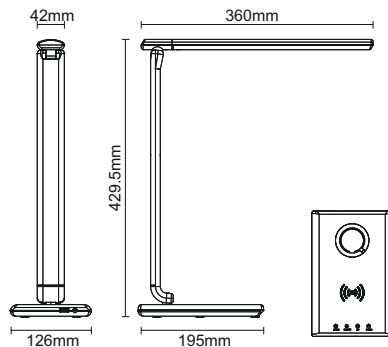

1/12



7W
DIMMABLE

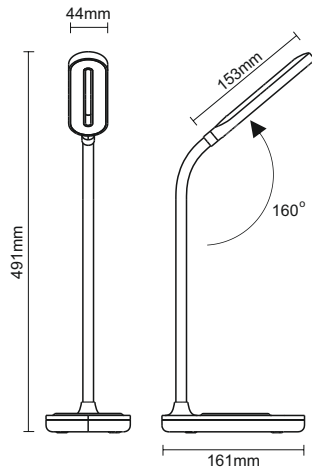

OCTAVIA



art.nr.: DL4301/B



1/15

- 350 Lm
- 3000K ~ 6500K
- AC 100-240V
- IP20
- Ra ≥ 80
- CHARGING
- 1.4m
- 20.000
- 30.000 h
- DIMMABLE
- Mercury-free
- <1.0sec
- Hg free
- UV free

7W
DIMMABLE

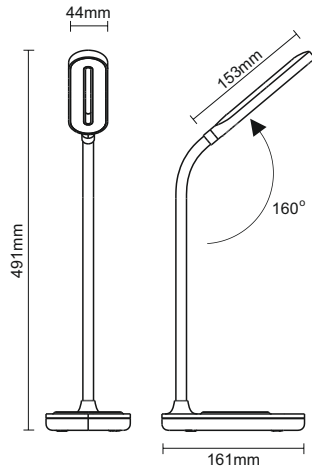

OCTAVIA

art.nr.: DL4301/W





1/15

- 350 Lm
- 3000K ~ 6500K
- AC 100-240V
- IP20
- Ra ≥ 80
- CHARGING
- 1.4m
- 20.000
- 30.000 h
- DIMMABLE
- Mercury-free
- <1.0sec
- Hg free
- UV free

7W
DIMMABLE

IRIS

art.nr.: DL4302/W

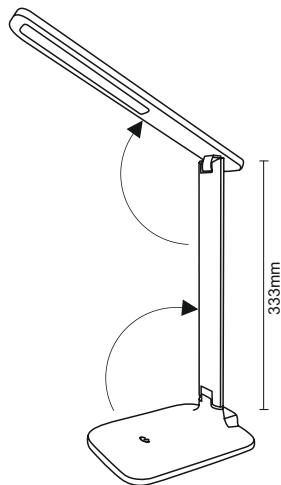

- 350 Lm
- 3000K ~ 6500K
- AC 100-240V
- IP20
- Ra ≥ 80
- 50-60 Hz
- 1.4m
- 20.000
- 30.000 h
- DIMMABLE
- Waterproof
- <1.0sec
- 0.1m
- Hg free
- UV free



1 / 16



7W
DIMMABLE

NAOMI

art.nr.: DL4303/W

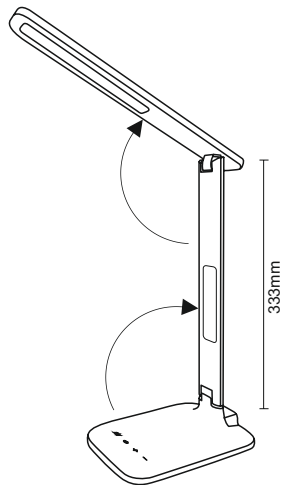

- 350 Lm
- 3000K ~ 6500K
- AC 100-240V
- TEMPER.
- ALARM
- TIME
- 1.4m
- 20.000
- 30.000 h
- DIMMABLE
- Waterproof
- <1.0sec
- 0.1m
- Hg free
- UV free

1 / 16





7W
DIMMABLE

NIGHT
LIGHT

KIARA

art.nr.: DL4304/B

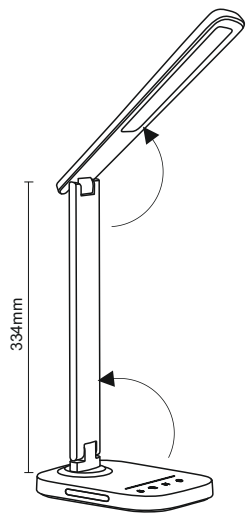

1/14

500 Lm

3000K ~ 6500K

AC 100-240V

IP20

Ra ≥ 80

AUTO OFF

CHARGING

1.4m

20.000

30.000 h

DIMMABLE



<1.0sec

Hg free



UV free

7W
DIMMABLE

NIGHT
LIGHT

KIARA

art.nr.: DL4304/W

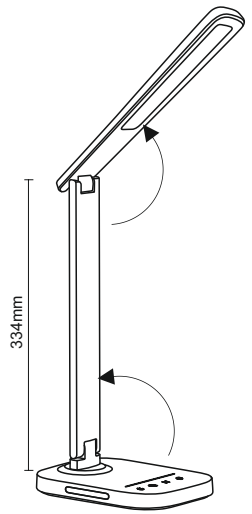

1/14

500 Lm

3000K ~ 6500K

AC 100-240V

IP20

Ra ≥ 80

AUTO OFF

CHARGING

1.4m

20.000

30.000 h

DIMMABLE



<1.0sec



Hg free

UV free

8W
DIMMABLE

JENY

art.nr.: DL4305/B

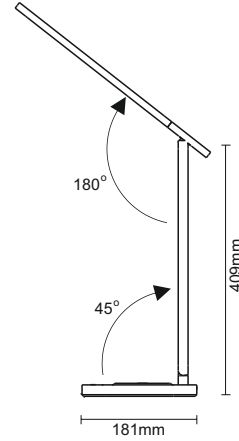



- 400 Lm
- 3000K ~ 6500K
- AC 100-240V
- IP20
- AUTO OFF
- CHARGING
- CHARGING
- 1.4m
- 20.000
- 30.000 h
- DIMMABLE
- Hg free
- UV free
- <1.0sec



12W
DIMMABLE

XENIA


art.nr.: DL4306/B

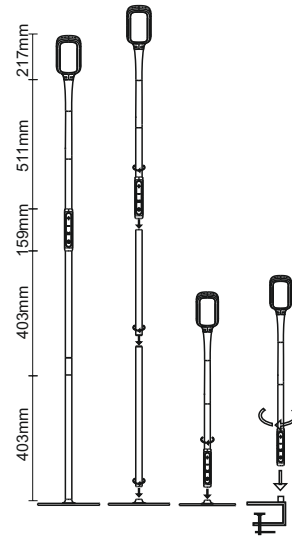


- 800 Lm
- 3000K ~ 6500K
- AC 100-240V
- IP20
- Ra ≥ 80
- AUTO OFF
- 1.7m
- 20.000
- 30.000 h
- DIMMABLE
- Hg free
- UV free
- <1.0sec
- 0.1m



8W
DIMMABLE

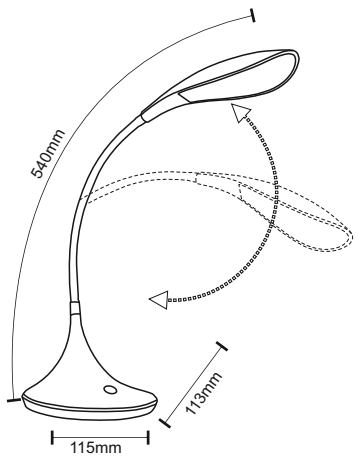


ADDISON
art.nr.: DL3205/W




1/6

- 400 Lm
- 4000K
- AC 100-240V
- IP20
- Ra ≥ 80
- 1.4m
- 20.000
- 30.000 h
- DIMMABLE
- Light bulb icon with lightning bolt
- <1.0sec
- 0.1m
- Hg free
- UV free

10W
DIMMABLE

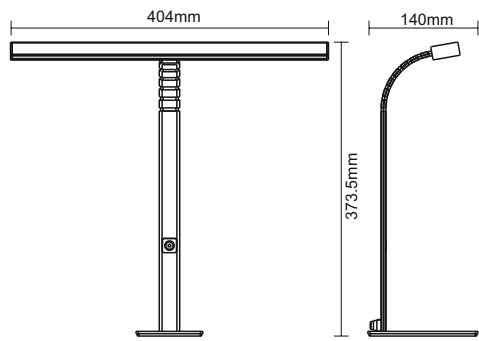

AMELIA
art.nr.: DL5301/S





1/6

- 750 Lm
- 4000K
- AC 100-240V
- IP20
- Ra ≥ 80
- 1.7m
- 20.000
- 30.000 h
- DIMMABLE
- Light bulb icon with lightning bolt
- <1.0sec
- 0.1m
- Hg free
- UV free

12W
DIMMABLE

FRIDA

art.nr.: DL5302/B

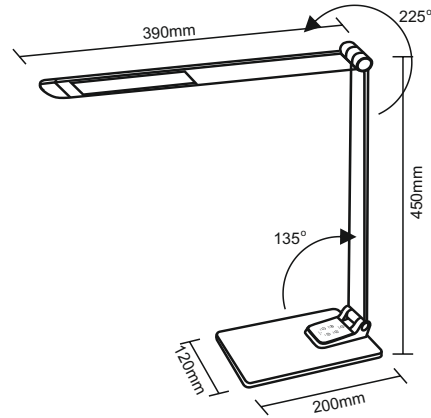



- 500 Lm
- 3000K ~ 6500K
- AC 100-240V
- IP20
- Ra ≥ 80
- CHARGING
- AUTO OFF
- 1.7m
- 20.000
- 30.000 h
- DIMMABLE
- Mercury free
- UV free



12W
DIMMABLE


JULIET

art.nr.: DL5303/B

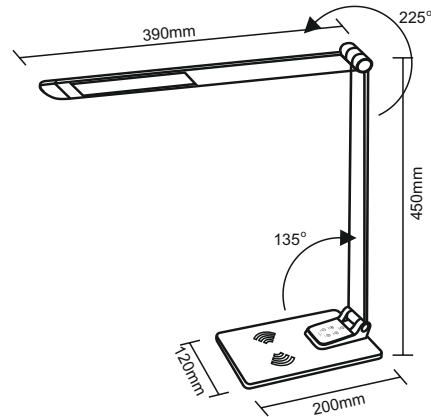

- 500 Lm
- 3000K ~ 6500K
- AC 100-240V
- IP20
- CHARGING
- CHARGING
- AUTO OFF
- 1.7m
- 20.000
- 30.000 h
- DIMMABLE
- Mercury free
- UV free



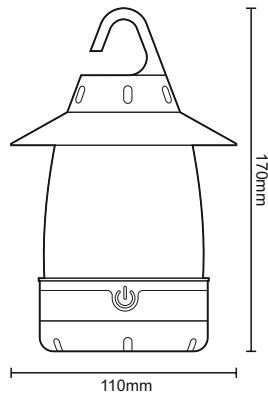

1W
WHITE LED + RED LED




art.nr.: **FCL01**

mode: 100% / 50% / RED / OFF



1 / 6 / 24

- 60Lm
- IPX4
- WHITE LED
- RED LED
- 4xAA
- 1,5V
-
- Hg free
- UV free

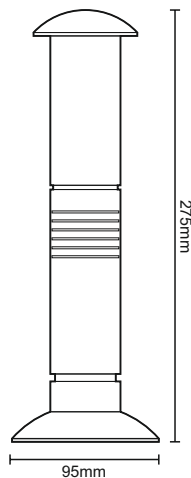

1W
CREE + RED LED



art.nr.: **FCL02**

mode: 1W CREE 100% / RED / OFF



1 / 8 / 32

- 10Lm
- IPX4
- CREE 1W
- RED LED
- 1xD
- 1,5V
-
- Hg free
- UV free

5W

FOCUS / OSRAM P8



art.nr.: **FLO1**

mode: 100% / 30% / OFF

85Lm	6000K	IPX4	P8 5W	1xAA	1,5V			50m		Focus	Hg free	UV free
------	-------	------	----------	------	------	--	--	-----	--	-------	---------	---------

1 / 12 / 96



8 585040 904911

5W

FOCUS / OSRAM P8



art.nr.: **FLO2**

mode: 100% / 30% / OFF

150Lm	6000K	IPX4	P8 5W	2xAA	1,5V			100m		Focus	Hg free	UV free
-------	-------	------	----------	------	------	--	--	------	--	-------	---------	---------

1 / 12 / 96



8 585040 904898

5W
FOCUS/OSRAM P8




art.nr: FL03
mode: 100% / 30% / OFF



1 / 12 / 72

- 200 Lm
- 6000K
- IPX4
- P8 5W
- 3xAAA
- 1,5V
- Waterproof
- 150m
- Focus
- Hg free
- UV free

5+3W
FOCUS/OSRAM P8+COB

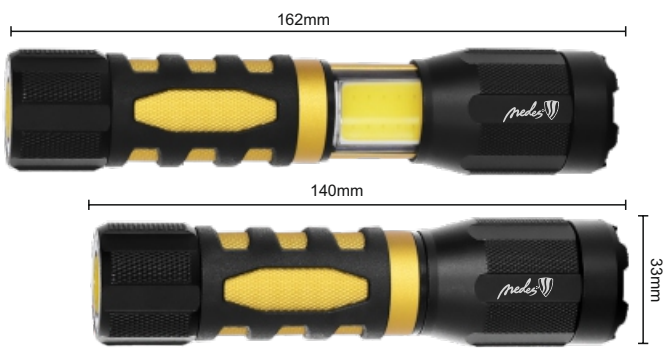

art.nr: FL10C
mode: 5W 100% / 5W 10% / 3W COB/OFF



1 / 20 / 40

- 400Lm +150Lm
- 6000K
- IPX4
- P8 5W COB 3W
- 3xAAA
- 1,5V
- Waterproof
- 200m
- Focus
- Click
- Hg free
- UV free

5+5W
CREE XPG + COB



art.nr.: **FS01R**

mode: 5W CREE 100% / 5W CREE 50% / 5W COB 100% / OFF

350Lm +200Lm	6000K	IPX4	XPG 5W COB 5W	100cm	POWER INDICATOR	POWER BANK	5h(5V/1A)	5W-5h	2xLi-Ion	4000mAh			350m	Hg free	UV free
-----------------	-------	------	------------------	-------	--------------------	---------------	-----------	-------	----------	---------	--	--	------	---------	---------

1 / 4 / 16



5+5W
OSRAM P8 + COB



art.nr.: **FS02R**

mode: 5W P8 100% / 5W P8 30% / 5W P8 / 5W COB 100% / OFF

400Lm +300Lm	6000K	IPX4	P8 5W COB 5W	100cm	POWER INDICATOR	POWER BANK	5h(5V/1A)	5W-5h	2xLi-Ion	4000mAh			150m	Hg free	UV free
-----------------	-------	------	-----------------	-------	--------------------	---------------	-----------	-------	----------	---------	--	--	------	---------	---------

1 / 4 / 16



5+3W
CREE XPG + COB



art.nr: **FS03R**

mode: 5W CREE 100% / 5W CREE 50% / / OFF / 3W WHITE COB / 3W RED COB / / 3W RED COB / OFF



1 / 4 / 16

350Lm
+180Lm

6000K

IP65

CREE 5W
COB 3W

60cm

POWER INDICATOR

POWER BANK

7h(5V/1A)

5W-3h

2xLi-Ion


4000mAh

400m

Hg free

UV free

5+1W
COB + LED

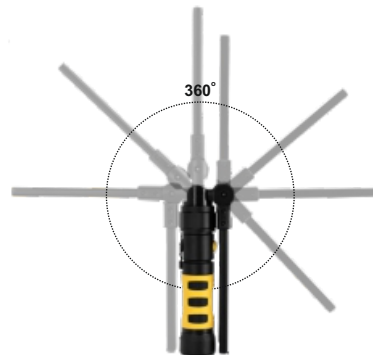

art.nr.: **WLO1R**


mode: 5W COB 100% / 5W COB 10% / 1W LED / OFF

600Lm +80Lm	6000K	IPX4	COB 5W LED 1W	100cm		3h(5V/1A)	5W-3h	1W-10h	1xLi-Ion	1800mAh		Hg free	UV free
----------------	-------	------	------------------	-------	--	-----------	-------	--------	----------	---------	--	---------	---------

1 / 20 / 40



5+3W
COB + LED



art.nr.: **WLO2R**

mode: 5W COB 30% / 5W COB 100% / 3W LED / OFF

400Lm +120Lm	6000K	IPX4	COB 5W LED 3W	30cm		POWER INDICATOR	4h(5V/1A)	5W-3h	3W-8h	1xLi-Ion	2000mAh		Hg free	UV free
-----------------	-------	------	------------------	------	--	--------------------	-----------	-------	-------	----------	---------	--	---------	---------

1 / 20 / 40




10W
COB



378 mm

38 mm

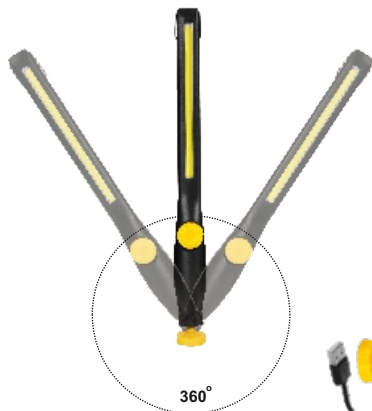

360°



art.nr.: **WLO3R**



1 / 15 / 45

400 Lm	6000K	IPX4	COB 10W	E 30cm	POWER INDICATOR	4h(5V/1A)	10W-3h	1xLi-Ion	2000mAh	0% 100%	Hg free	UV free
--------	-------	------	---------	--------	-----------------	-----------	--------	----------	---------	---------	---------	---------



1 / 15 / 45

300Lm +300Lm	IP65	P8 3W LED 3W	E 30cm	POWER BANK	4h(5V/1A)	LED-5h	P8-6h	1xLi-Ion	2500mAh	100m	Hg free	UV free
--------------	------	--------------	--------	------------	-----------	--------	-------	----------	---------	------	---------	---------

mode: 40LEDs 10% / 40LEDs 50% / 40LEDs 100% / P8 50% / P8 100% / P8 SOS / P8 / OFF

3+3W
OSRAM P8 + LED



240mm

41mm



art.nr.: **WLO4R**

10+3W
COB + LED



art.nr.: **WL05R**


mode: 3W LED 100 % / 10W COB 100 % / 10W COB RED / 10W COB RED ☀ / OFF

1 / 20 / 40

600Lm +180Lm	6000K	IPX3	COB 10W LED 3W	50cm		POWER INDICATOR	POWER BANK	5h(5V/1A)	10W-4h	1xLi-Ion	4000mAh	0% 100%		Hg free
-----------------	-------	------	-------------------	------	--	--------------------	---------------	-----------	--------	----------	---------	---------	--	---------



10W
COB

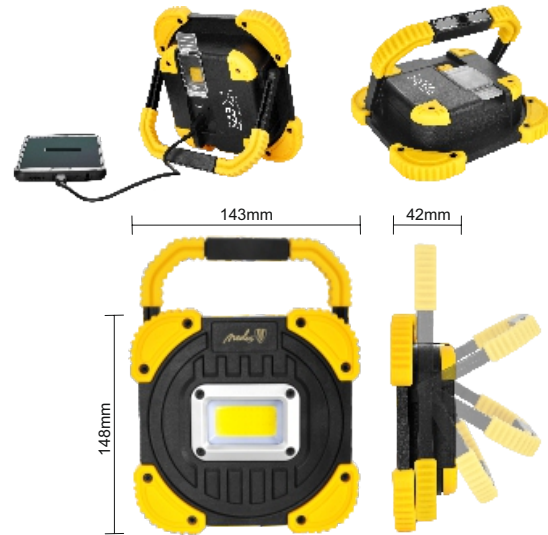

art.nr.: **WL06R**

mode: 10W COB 100 % / 10W COB 30 % / OFF

1 / 6 / 24

1000 Lm	6000K	IPX4	COB 10W	100cm	5V/1A		POWER BANK	5.5h(5V/1A)	10W-2.5h	Li-Ion	4000mAh		Hg free	UV free
------------	-------	------	------------	-------	-------	--	---------------	-------------	----------	--------	---------	--	---------	---------



20W
COB



art.nr.: **WL07R**

mode: 10W COB 100 % / 2 x 10W COB 100 % / 2 x 10W COB / OFF



1 / 4 / 8

1800
Lm

6000K

IPX4

COB
20W

90cm



POWER
INDICATOR

POWER
BANK

8h(5V/1A)

20W-3h

Li-Ion


8000mAh

0% 100%



Hg free

5+3W
COB + LED

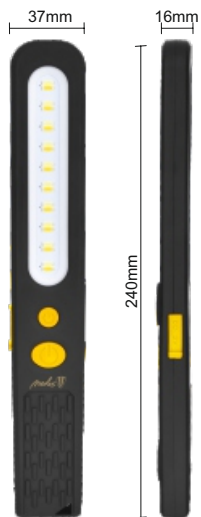

art.nr.: **WL08R**

mode: 5W 6500K 100 % / 5W 3000K 100 % / OFF ; 3W / OFF



1 / 40 / 80

400Lm
+45Lm

6500K
3000K

IPX3

COB 5W
LED 3W

30cm



POWER
INDICATOR

3h(5V/1A)

5W-3.5h

Li-Ion

1200mAh

Hg free

UV free

3W
LED + RED SMD
IR SENSOR



art.nr.: **LHO1R**

mode: 100% / 50% / RED SMD / RED LED / OFF

- 120Lm
+120Lm
- 6000K
- IPX4
- LED 3W
SMD RED
- IR
SENSOR
- 50cm
- 2.5h(5V/1A)
- 3W-3h
- Li-Pol
- 900mAh
-
-
-

1 / 20 / 80



5W
CREE XPG2
IR SENSOR



art.nr.: **LHO2R**

mode: 100% / 50% / 20% / OFF / 3sec: SOS

- 230
Lm
- 6000K
- IP66
- XPG2
5W
- IR
SENSOR
- 30cm
- 3h(5V/1A)
- 5W-4h
- Li-Pol
- 1200mAh
-
-
-

1 / 20 / 80



5+3W
 CREE XTE + GREEN LED
 RED LED / IR SENSOR



art.nr: **LH03R**

mode: 5W 30% / 5W 100% / 3W GREEN LED / OFF ; RED LED / RED LED / OFF



1 / 20 / 80

280Lm
+100Lm

6500K

IPX4

XTE 5W
LED 3W

30cm

IR
SENSOR

2.5h(5V/1A)

5W-3.5h

Li-Ion

1200mAh

Hg free

UV free

5W
 CREE XTE + RED LED
 IR SENSOR / ZOOM



art.nr: **LH04R**

mode: 5W CREE 100% / 5W CREE 30% / 5W CREE / RED LEDs / RED LEDs / OFF



1 / 20 / 80

260
Lm

6500K

IPX3

CREE 5W
LED RED

50cm

IR
SENSOR

3.5h(5V/1A)

5W-4h


Li-Ion

1800mAh

Hg free

UV free

5W
CREE XTE + COB
RED LED / IR SENSOR

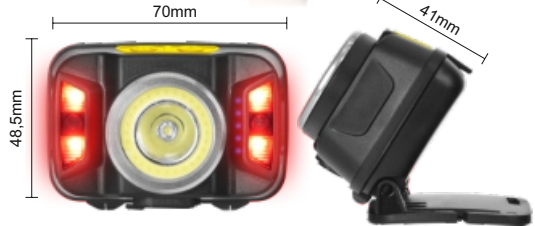

art.nr: **LH05R**

mode: 5W CREE 100% / 5W CREE 30% / 5W CREE / RED LEDs / RED LEDs / OFF ; 3sec 3W COB / OFF

- 320Lm
+170Lm
- 6000K
- IPX4
- CREE 5W
COB 3W
- IR
SENSOR
- POWER
INDICATOR
- 50cm
- 3.5h(5V/1A)
- 5W-3h
- Li-Ion
- 1800mAh
-
- Hg
free
- UV
free

1 / 20 / 80



5+3W
OSRAM P8 + COB
RED LEDs



art.nr: **LH241**

mode: 5W+3W COB 100% / 5W 100% / 3W COB 100% / OFF ; 3sec: RED LEDs

- 250Lm
+150Lm
- IPX5
- P8 5W
COB 3W
- 3xAAA
- 1,5V
-
- Hg
free
- UV
free

1 / 20 / 80



3W



art.nr.: LH131



1 / 12 / 48



1W



art.nr.: LB01




1 / 16 / 160



1W



*+PIR SENSOR 120° 0-5m/30s ± 5s

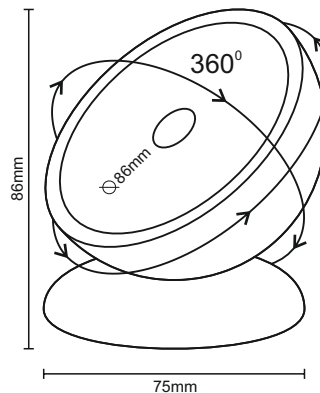

art.nr.: LN201

40Lm

6000K

5LED

AUTO

1W
10W

3xAAA

1.5V

4-5h

Li-Po

450mA

6h

0% 100%

Hg free

UV free

1 / 24 / 48




8 585040 903211

0.4W



*+PIR SENSOR 1200 4m/25s ± 5s

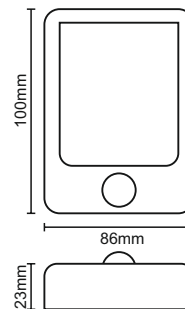

art.nr.: LS401

20Lm

6000K

IP20

2LED

AUTO

0.4W
5W

8h

4xAAA

1.5V

0% 100%


Hg free

UV free

1 / 24 / 96




8 585040 903235

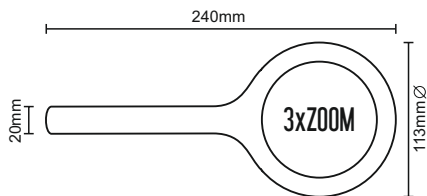


art.nr.: LM101



1 / 12 / 48




3W

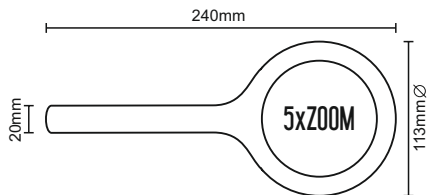


art.nr.: LM102



1 / 12 / 48



3W



art.nr.: LW101



1 / 24 / 96




0.4W

1w



CANDY
art.nr.: MLO1R

- 50Lm
- 6000K
- IP20
- 30cm
- POWER BANK
- 3h(5V/1A)
- 1W-32h
- Li-Ion
- 3000mAh
- 0% 100%
- Hg free
- UV free

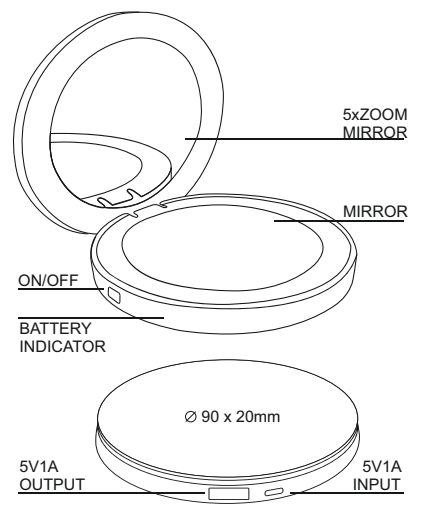

1 / 60




3+3W
LED + LED



BABY
art.nr.: MLO2R

⊕ 3W 4000K 100 % / 70% / 50% / 3W 3000K 100 % / 70% / 50% / 3W 6000K 100% / 70% / 50% / OFF ; ⊕ 3W LED 6000K / OFF



- 50Lm +50Lm
- 3000K 4000K 6000K
- IP20
- 30cm
- POWER BANK
- 3h(5V/1A)
- 3W-4h
- Li-Ion
- 400mAh
- DIMMABLE
- Hg free
- UV free

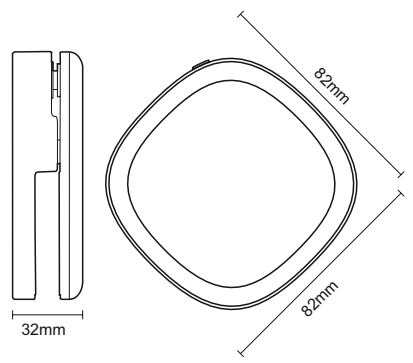

1 / 100



40W

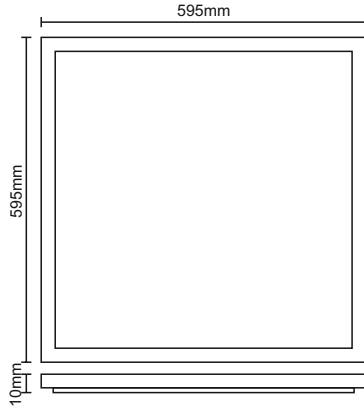

art.nr: PL121

typ: WPL40W/SMD/4500K/WH



1 / 10

3400 Lm

4500K

AC 180-240V

40W 290W

-15°C +50°C

IP20

Ra ≥ 80

25.000

40.000 h

0% 100%





<1.0sec

120°

Hg free

UV free

40W

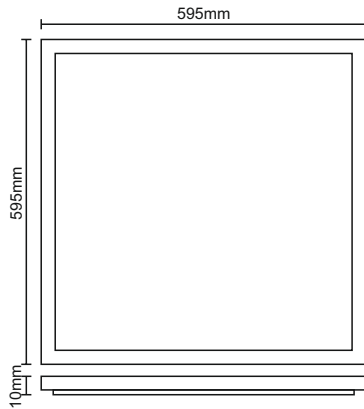

art.nr: PL121H

typ: WPL40W/SMD/4500K/WH/HV



1 / 10

4050 Lm

4500K

AC 180-240V

40W 350W

-15°C +50°C

IP20

Ra ≥ 80

25.000

40.000 h

0% 100%




<1.0sec

120°

Hg free

UV free

40W

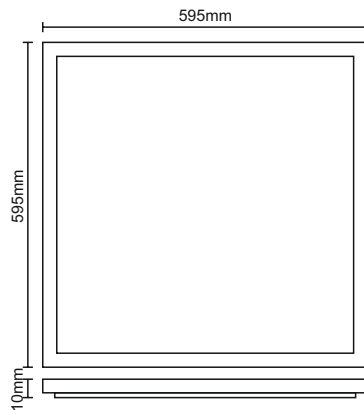


art.nr.: PL121H/U


tip: WPL40W/SMD/4500K/HV/WH/UGR



1 / 10



32W

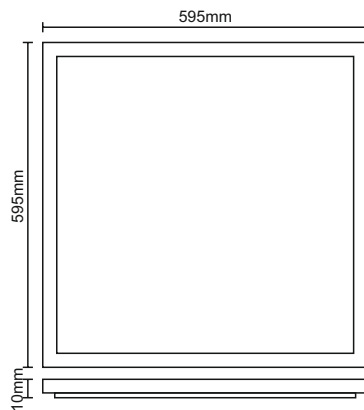


art.nr.: PL120P/U


tip: WPL32W/SMD/4500K/PP/WH/UGR



1 / 10





ACCESS
HANGING

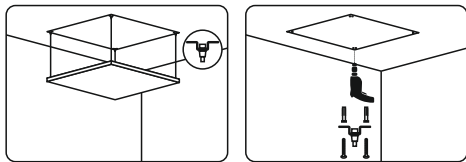

USED FOR:
PL 121, PL 121H
PL 121H/U
PL 120P/U




1 / 50



art.nr.: **SN100**
tup.: SNA1000mm


ACCESS
CLIPS

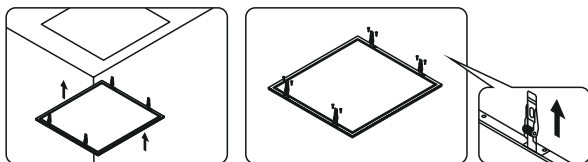

USED FOR:
PL 121, PL 121H
PL 121H/U
PL 120P/U




1 / 100



art.nr.: **SNR001**
tup.: SR120/4

ACCESS
FRAME

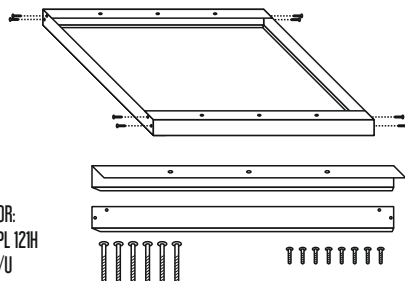

USED FOR:
PL 121, PL 121H
PL 121H/U
PL 120P/U




1 / 20



art.nr.: **MS121**
tup.: MSE595x595/WH

6W

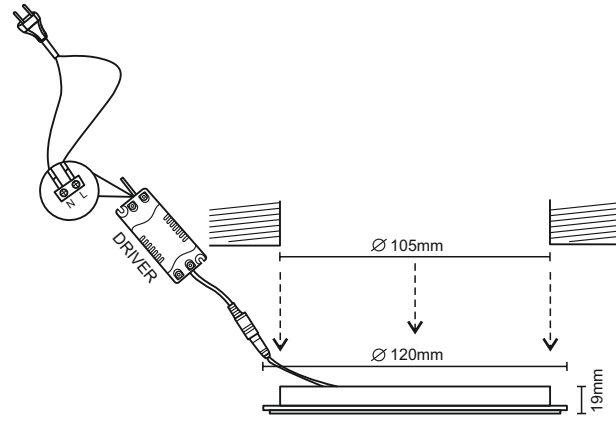

ENERGY STAR logo with text: ENERGY STAR Y UA IE IA енергія - енергія

Energy efficiency scale: A+, A, A, B, C, D, E. The A+ class is highlighted.

6 kWh/1000h


art.nr.: LPL111

typ: PR6W/30SMD/2835/2800K

410 Lm | 2800K | AC 85-265V | 6W 50W | -5°C +40°C | IP20 | Ra≥80 | 30.000 | 30.000 h | 0% 100% | UV free | <1.0sec | 120° | Hg free | UV free



6W

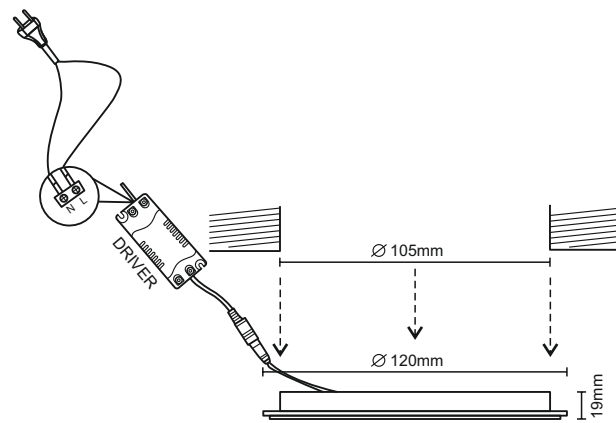

ENERGY STAR logo with text: ENERGY STAR Y UA IE IA енергія - енергія

Energy efficiency scale: A+, A, A, B, C, D, E. The A+ class is highlighted.

6 kWh/1000h



art.nr.: LPL121

typ: PR6W/30SMD/2835/4000K

420 Lm | 4000K | AC 85-265V | 6W 50W | -5°C +40°C | IP20 | Ra≥80 | 30.000 | 30.000 h | 0% 100% | UV free | <1.0sec | 120° | Hg free | UV free



12W

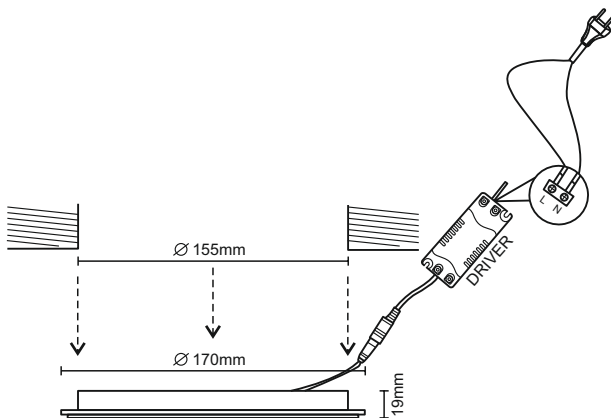

art.nr.: LPL113

typ: PR12W/60SMD/2835/2800K



950 Lm 2800K

AC 85-265V

12W 80W

-5°C +40°C

IP20

Ra ≥ 80

30.000

30.000 h

0% 100%





<1.0sec

120°

Hg free

UV free

12W

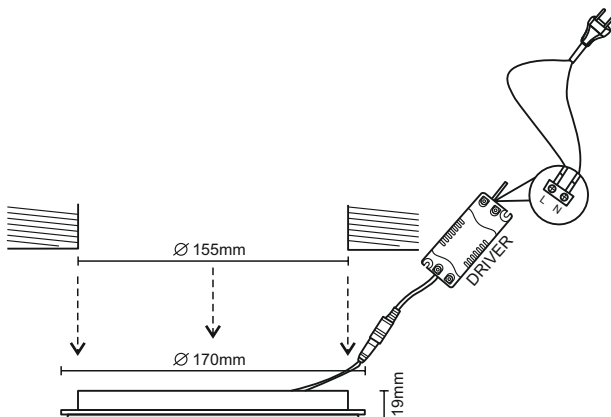

art.nr.: LPL123

typ: PR12W/60SMD/2835/4000K



960 Lm 4000K

AC 85-265V

12W 80W

-5°C +40°C

IP20

Ra ≥ 80

30.000

30.000 h

0% 100%





<1.0sec

120°

Hg free

UV free

18W

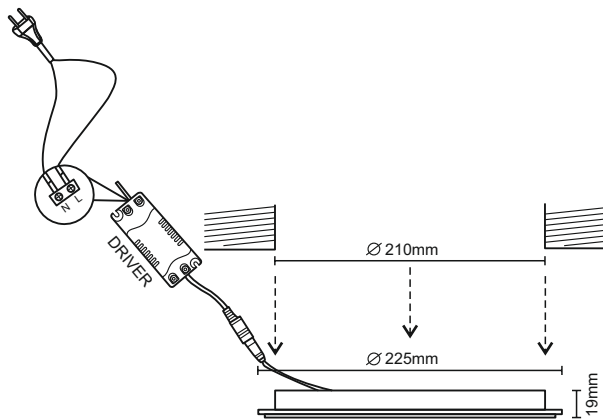

art.nr.: LPL114



typ: PR18W/90SMD/2835/2800K

1510 Lm	2800K	AC 85-265V	18W 130W	-5 °C +40 °C	IP20	Ra>=80	30.000	30.000 h	0% 100%		<1.0sec	120°	Hg free	UV free
---------	-------	------------	----------	--------------	------	--------	--------	----------	---------	--	---------	------	---------	---------

1 / 20



18W

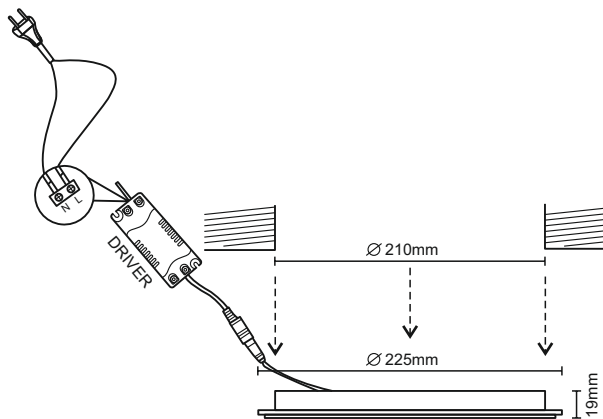

art.nr.: LPL124



typ: PR18W/90SMD/2835/4000K

1520 Lm	4000K	AC 85-265V	18W 130W	-5 °C +40 °C	IP20	Ra>=80	30.000	30.000 h	0% 100%		<1.0sec	120°	Hg free	UV free
---------	-------	------------	----------	--------------	------	--------	--------	----------	---------	--	---------	------	---------	---------

1 / 20



24W

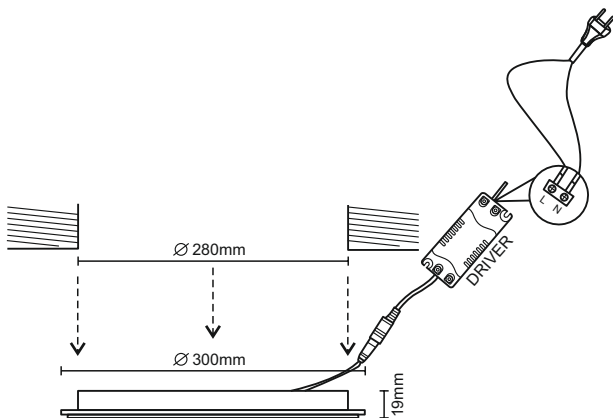

art.nr.: LPL115



typ: PR24W/120SMD/2835/2800K



1 / 10

1820 Lm	2800K	AC 85-265V	24W 180W	-5°C +40°C	IP20	Ra ≥ 80	30.000	30.000 h	0% 100%		<1.0sec	120°	Hg free	UV free
---------	-------	------------	----------	------------	------	---------	--------	----------	---------	--	---------	------	---------	---------

24W

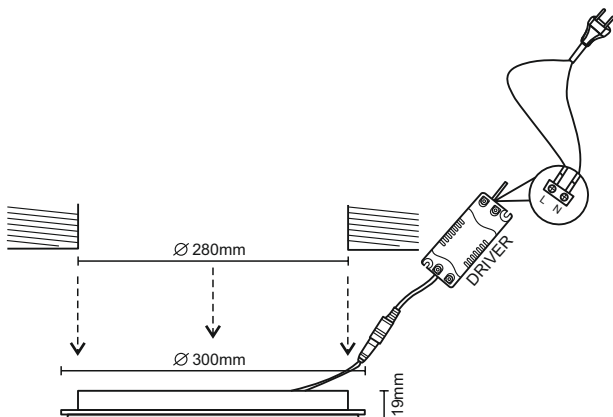

art.nr.: LPL125


typ: PR24W/120SMD/2835/4000K



1 / 10

1850 Lm	4000K	AC 85-265V	24W 180W	-5°C +40°C	IP20	Ra ≥ 80	30.000	30.000 h	0% 100%		<1.0sec	120°	Hg free	UV free
---------	-------	------------	----------	------------	------	---------	--------	----------	---------	--	---------	------	---------	---------

6W

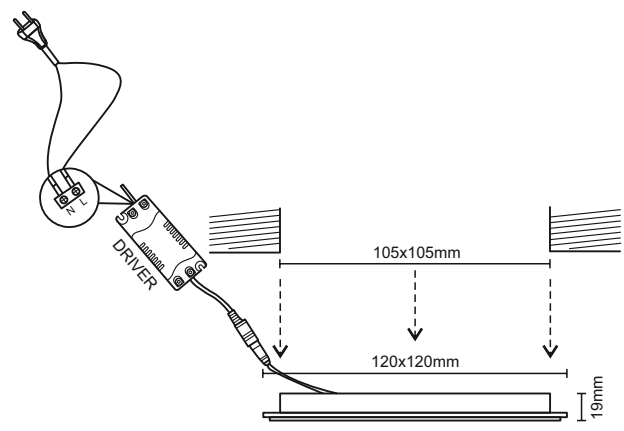

ENERGY STAR logo with text: ENERGY STAR, енергия - енергия

Energy efficiency scale: A+, A, A, B, C, D, E

Class: **A+**

Consumption: 6 kWh/1000h

art.nr.: **LPL211**


tip: PS6W/30SMD/2835/2800K

410 Lm | 2800K | AC 85-265V | 6W 50W | -5°C +40°C | IP20 | Ra=80 | 30.000 | 30.000 h | 0% 100% | | <math><1.0\text{sec}</math> | 120° | Hg free | UV free

1 / 40



6W

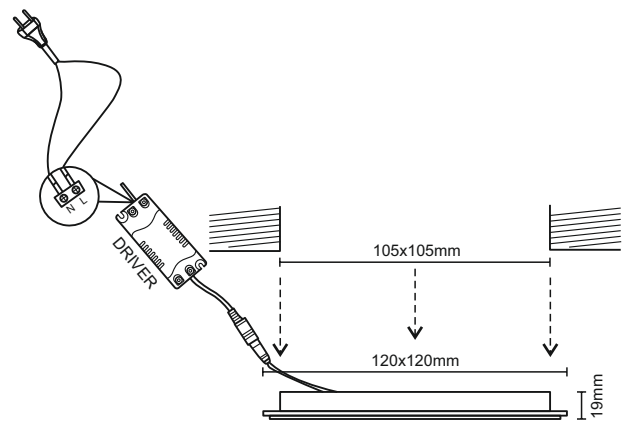

ENERGY STAR logo with text: ENERGY STAR, енергия - енергия

Energy efficiency scale: A+, A, A, B, C, D, E

Class: **A+**

Consumption: 6 kWh/1000h

art.nr.: **LPL221**



tip: PS6W/30SMD/2835/4000K

420 Lm | 4000K | AC 85-265V | 6W 50W | -5°C +40°C | IP20 | Ra=80 | 30.000 | 30.000 h | 0% 100% | | <math><1.0\text{sec}</math> | 120° | Hg free | UV free

1 / 40



12W

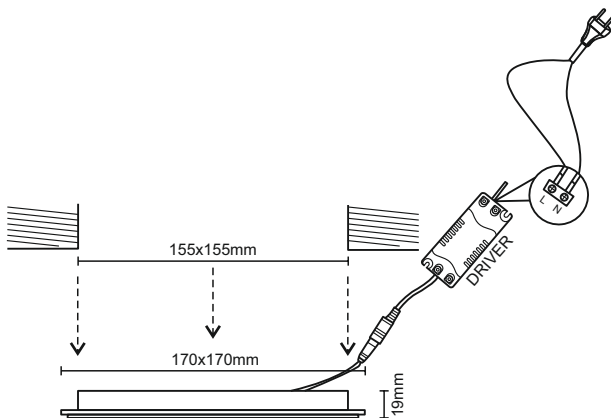



art.nr.: LPL213

тип: PS12W/60SMD/2835/2800K



950 Lm	2800K	AC 85-265V	12W 80W	-5°C +40°C	IP20	Ra ≥ 80	30.000	30.000 h	0% 100%	0% 100%	<1.0sec	120°	Hg free	UV free
--------	-------	------------	---------	------------	------	---------	--------	----------	---------	---------	---------	------	---------	---------

12W

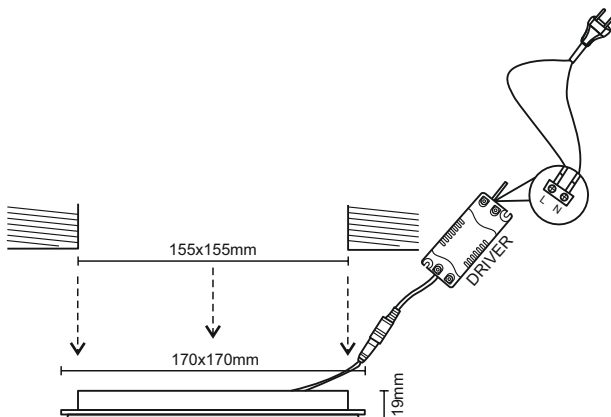



art.nr.: LPL223

тип: PS12W/60SMD/2835/4000K



960 Lm	4000K	AC 85-265V	12W 80W	-5°C +40°C	IP20	Ra ≥ 80	30.000	30.000 h	0% 100%	0% 100%	<1.0sec	120°	Hg free	UV free
--------	-------	------------	---------	------------	------	---------	--------	----------	---------	---------	---------	------	---------	---------

18W

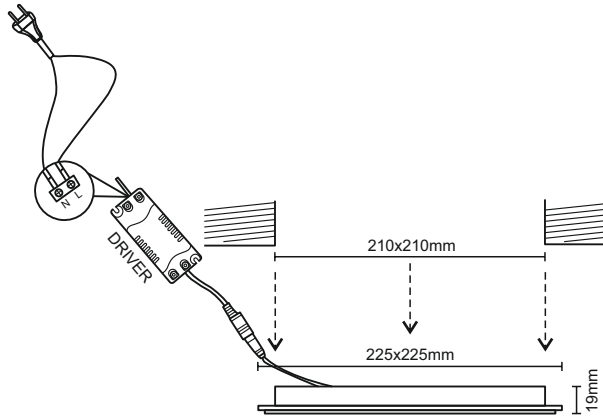

art.nr.: **LPL214**

tip: PS18W/90SMD/2835/2800K

1510 Lm

2800K

AC 85-265V

18W 130W

-5 °C +40 °C

IP20

Ra=80

30.000

30.000 h

0% 100%

Waterproof icon

<1.0sec

120°



Hg free

UV free



1 / 20

18W

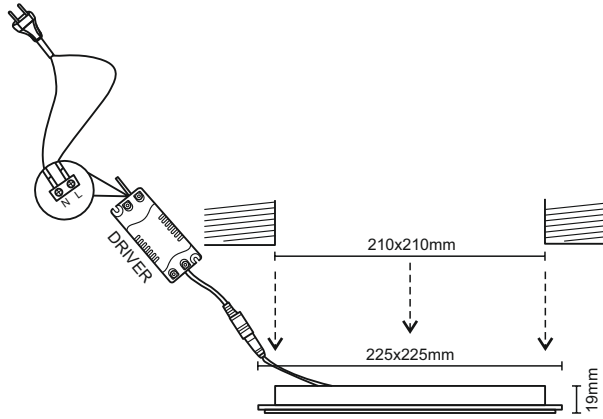

art.nr.: **LPL224**

tip: PS18W/90SMD/2835/4000K

1520 Lm

4000K

AC 85-265V

18W 130W

-5 °C +40 °C

IP20

Ra=80

30.000

30.000 h

0% 100%

Waterproof icon

<1.0sec

120°



Hg free

UV free



1 / 20

24W

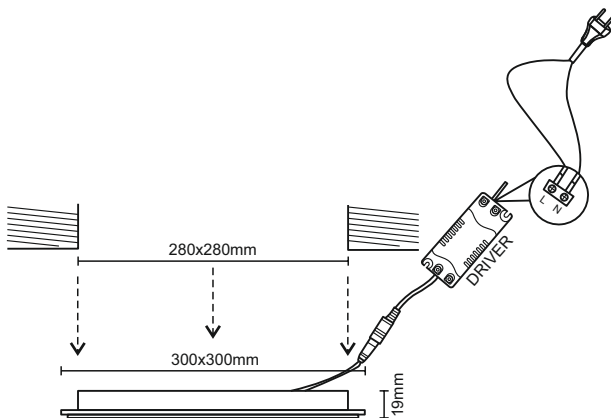

art.nr.: LPL215



typ: PS24W/120SMD/2835/2800K



1 / 10

1820 Lm	2800K	AC 85-265V	24W 180W	-5°C +40°C	IP20	Ra ≥ 80	30.000	30.000 h	0% 100%	0	<1.0sec	120°	Hg free	UV free
---------	-------	------------	----------	------------	------	---------	--------	----------	---------	---	---------	------	---------	---------

24W

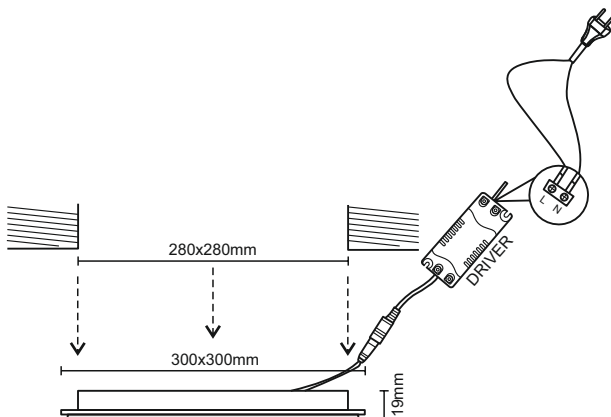

art.nr.: LPL225


typ: PS24W/120SMD/2835/4000K



1 / 10

1850 Lm	4000K	AC 85-265V	24W 180W	-5°C +40°C	IP20	Ra ≥ 80	30.000	30.000 h	0% 100%	0	<1.0sec	120°	Hg free	UV free
---------	-------	------------	----------	------------	------	---------	--------	----------	---------	---	---------	------	---------	---------

6W

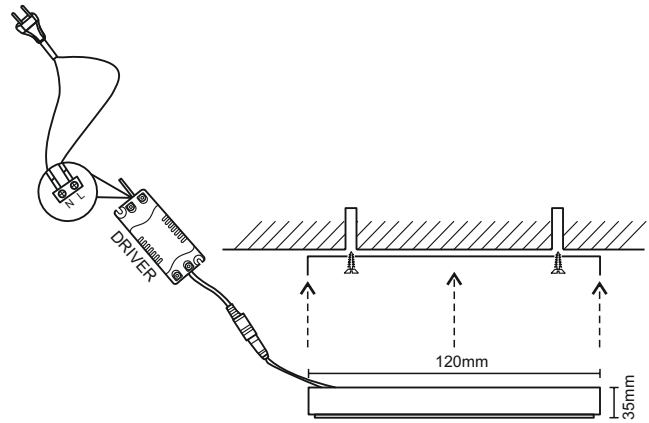

ENERGY LABEL: A+ (6 kWh/1000h)

art.nr.: LPL321


typ.: PRSF6W/30SMD/2835/4000K

420 Lm, 4000K, AC 85-265V, 6W/50W, -5°C/+40°C, IP20, Ra=80, 30.000, 30.000 h, 0% 100%, $\le 1.0\text{sec}$, 120°, Hg free, UV free

1 / 40



12W

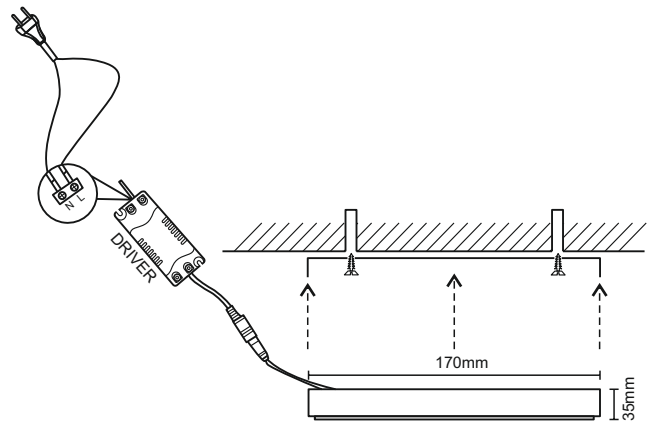

ENERGY LABEL: A+ (12 kWh/1000h)

art.nr.: LPL323



typ.: PRSF12W/60SMD/2835/4000K

960 Lm, 4000K, AC 85-265V, 12W/80W, -5°C/+40°C, IP20, Ra=80, 30.000, 30.000 h, 0% 100%, $\le 1.0\text{sec}$, 120°, Hg free, UV free

1 / 20



18W

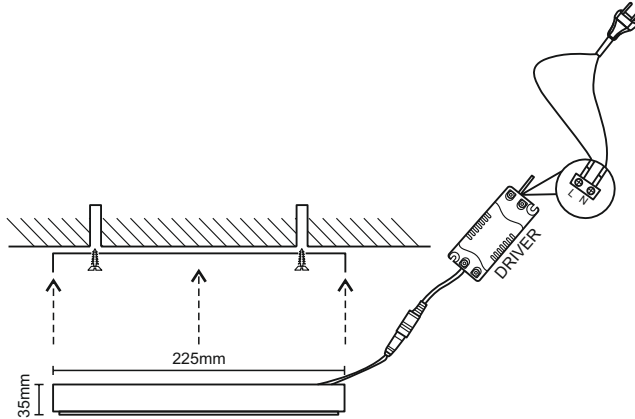

art.nr: LPL324

тип: PRSF18W/90SMD/2835/4000K



1 / 20

1520 Lm

4000K

AC 85-265V

18W 130W

-5°C +40°C

IP20

Ra ≥ 80

30.000

30.000 h

0% 100%

Hg free



<1.0sec

120°

Hg free

UV free

24W

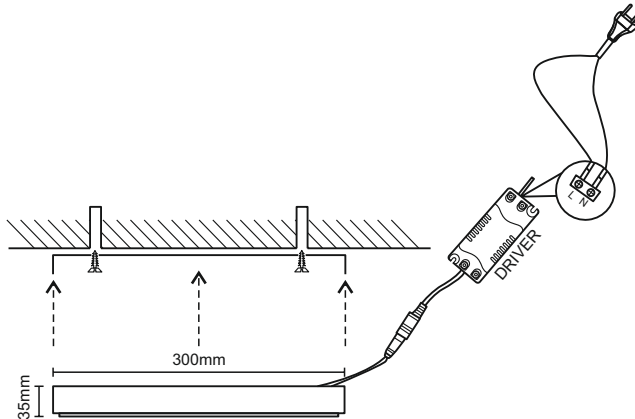

art.nr: LPL325

тип: PRSF24W/120SMD/2835/4000K



1 / 10

1850 Lm

4000K

AC 85-265V

24W 180W

-5°C +40°C

IP20

Ra ≥ 80

30.000

30.000 h

0% 100%

Hg free


<1.0sec

120°

Hg free

UV free

6W

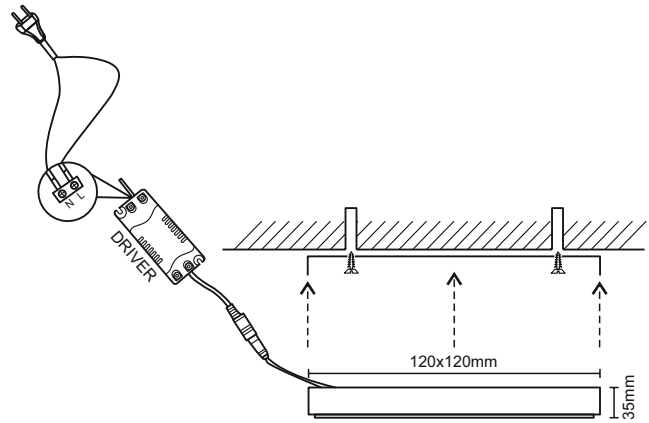

ENERGY LABEL: A+, 6 kWh/1000h

art.nr.: LPL421


typ: PSSF6W/30SMD/2835/4000K

420 Lm, 4000K, AC 85-265V, 6W/50W, -5°C/+40°C, IP20, Ra=80, 30.000, 30.000 h, 0% 100%, $\le 1.0\text{sec}$, 120°, Hg free, UV free

1 / 40



12W

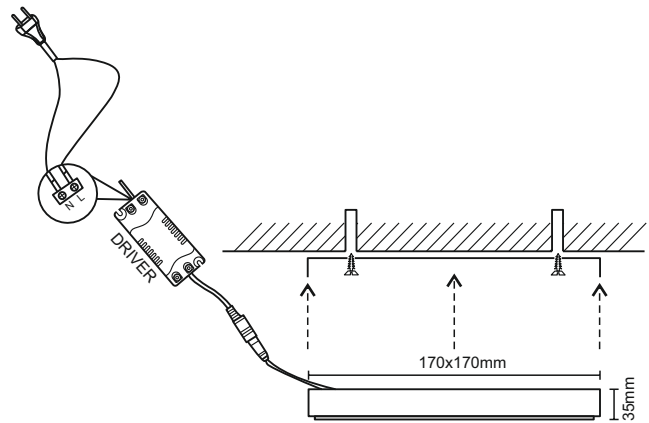

ENERGY LABEL: A+, 12 kWh/1000h

art.nr.: LPL423



typ: PSSF12W/60SMD/2835/4000K

960 Lm, 4000K, AC 85-265V, 12W/80W, -5°C/+40°C, IP20, Ra=80, 30.000, 30.000 h, 0% 100%, $\le 1.0\text{sec}$, 120°, Hg free, UV free

1 / 20



18W

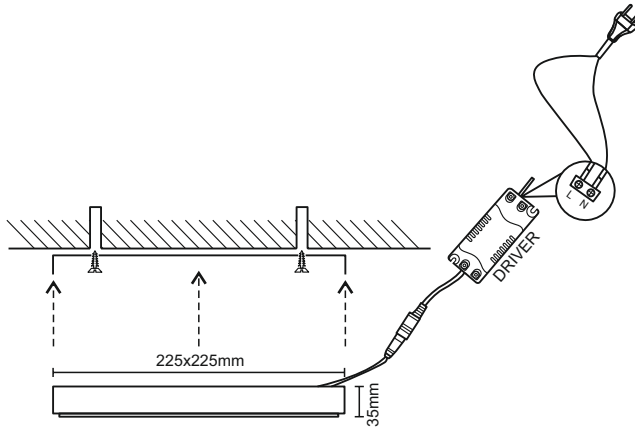



art.nr: LPL424

тип: PSSF18W/90SMD/2835/4000K



24W

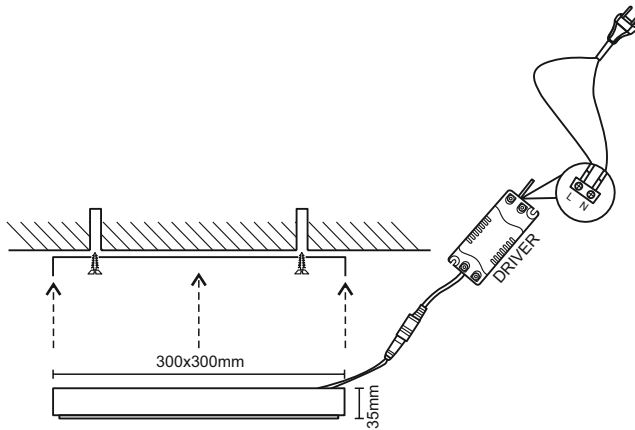



art.nr: LPL425

тип: PSSF24W/120SMD/2835/4000K



12W

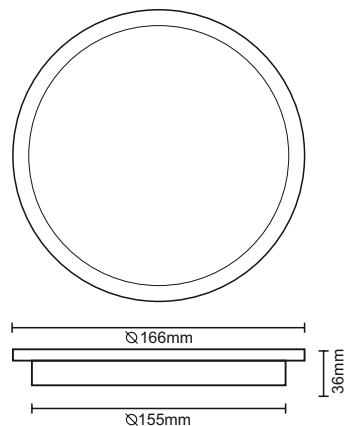

art.nr.: **LPL113H**



tip: PR12W/120SMD/2835/2800K/HV

1500 Lm | 2800K | AC 85-265V | 12W 140W | -10°C +50°C | IP40 | Ra=80 | 30.000 | 30.000 h | 0% 100% | | <1.0sec | 120° | Hg free | UV free

1 / 40



12W

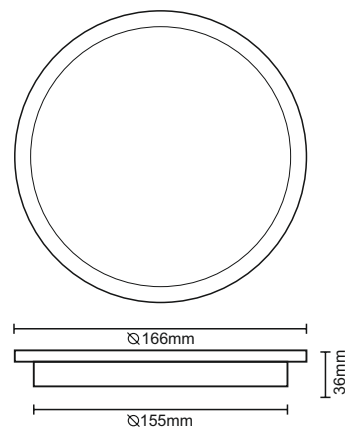

art.nr.: **LPL123H**



tip: PR12W/120SMD/2835/4000K/HV

1520 Lm | 4000K | AC 85-265V | 12W 145W | -10°C +50°C | IP40 | Ra=80 | 30.000 | 30.000 h | 0% 100% | | <1.0sec | 120° | Hg free | UV free

1 / 40



12W

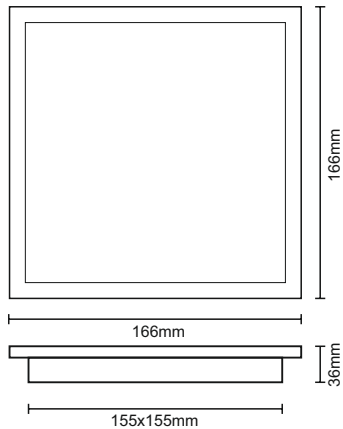

art.nr.: LPL213H



typ: PS12W/120SMD/2835/2800K/HV



1 / 40



12W

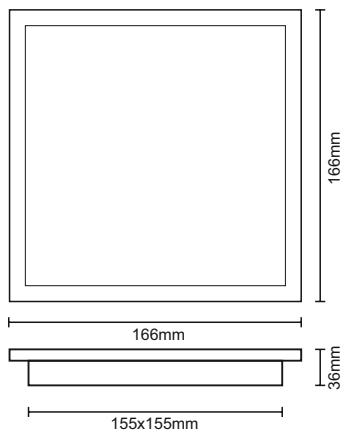

art.nr.: LPL223H




typ: PS12W/120SMD/2835/4000K/HV



1 / 40



0.4W

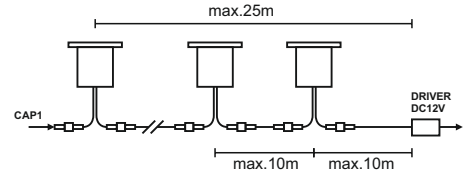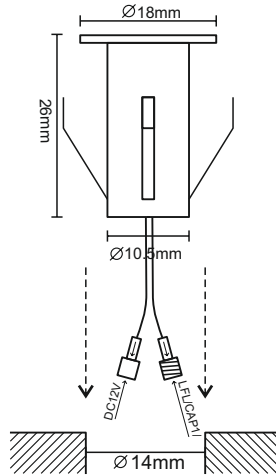




art.nr.: **LFL110**
tup: FL101/2800K

7Lm	2800K	DC12V	-30°C +65°C	IP67	Ra≥80	100KG	30.000	50.000 h	0% 100%		<1.0sec	120°	Hg free	UV free
-----	-------	-------	----------------	------	-------	-------	--------	----------	---------	--	---------	------	---------	---------

1 / 10 / 100



0.4W

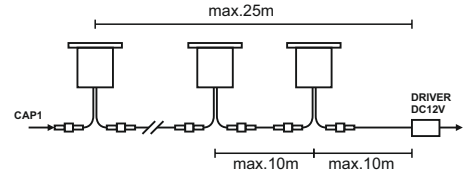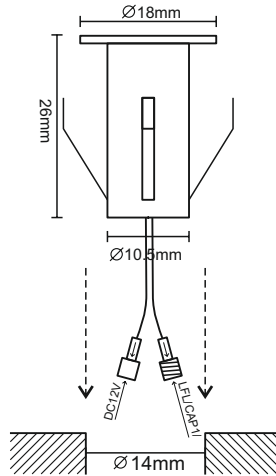




art.nr.: **LFL120**
tup: FL101/4000K

7Lm	4000K	DC12V	-30°C +65°C	IP67	Ra≥80	100KG	30.000	50.000 h	0% 100%		<1.0sec	120°	Hg free	UV free
-----	-------	-------	----------------	------	-------	-------	--------	----------	---------	--	---------	------	---------	---------


1 / 10 / 100



0.6W

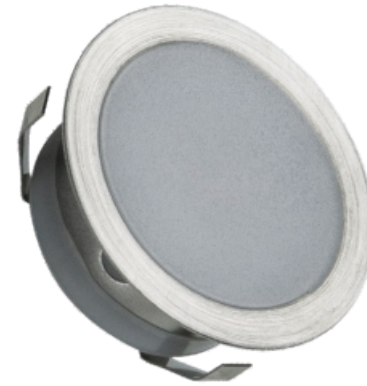
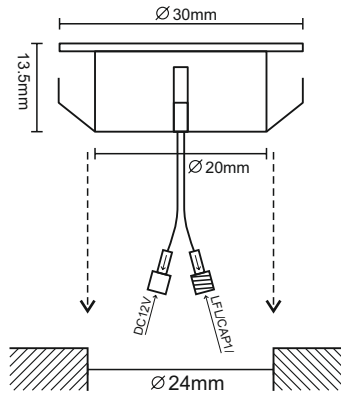
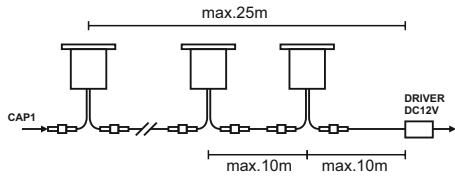


art.nr.: **LFL111**
 typ: FL102/2800K




1 / 10 / 100

6Lm	2800K	DC12V	-30°C +65°C	IP67	Ra≥80	100KG	30.000	50.000 h	0% 100%	Waterproof	<1.0sec	120°	Hg free	UV free
-----	-------	-------	----------------	------	-------	-------	--------	----------	---------	------------	---------	------	---------	---------

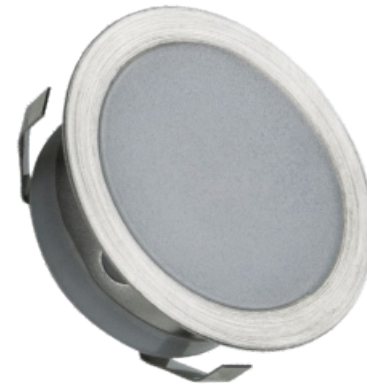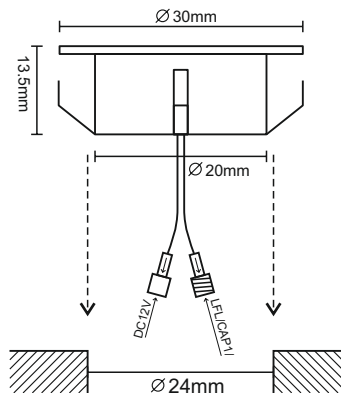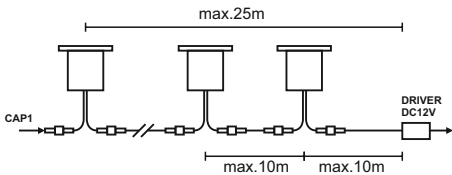




art.nr.: **LFL121**
 typ: FL102/4000K



1 / 10 / 100

6Lm	4000K	DC12V	-30°C +65°C	IP67	Ra≥80	100KG	30.000	50.000 h	0% 100%	Waterproof	<1.0sec	120°	Hg free	UV free
-----	-------	-------	----------------	------	-------	-------	--------	----------	---------	------------	---------	------	---------	---------

0.6W

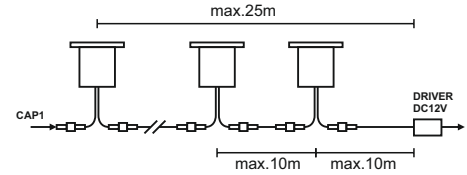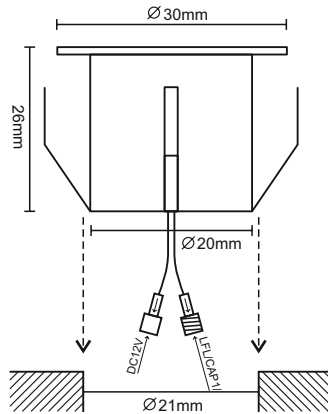




art.nr: LFL112
tup: FL103/2800K

- 40Lm
- 2800K
- DC12V
- 30°C / +65°C
- IP67
- Ra ≥ 80
- 100KG
- 30.000
- 50.000 h
- 0% / 100%
- Light bulb icon
- <1.0sec
- 120°
- Hg free
- UV free

1 / 10 / 100



0.6W

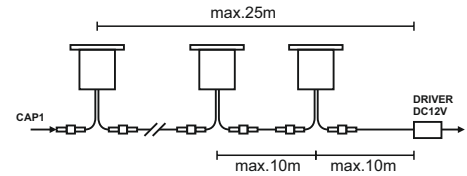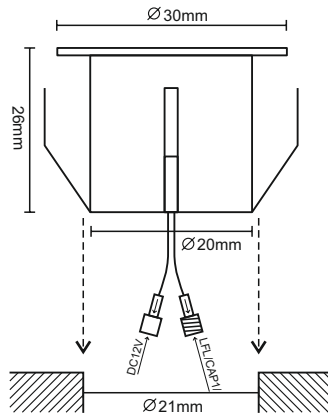



art.nr: LFL122
tup: FL103/4000K

- 40Lm
- 4000K
- DC12V
- 30°C / +65°C
- IP67
- Ra ≥ 80
- 100KG
- 30.000
- 50.000 h
- 0% / 100%
- Light bulb icon
- <1.0sec
- 120°
- Hg free
- UV free


1 / 10 / 100



0.6W

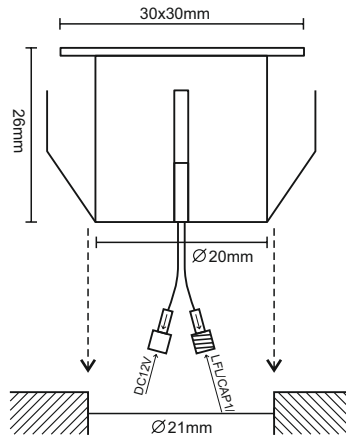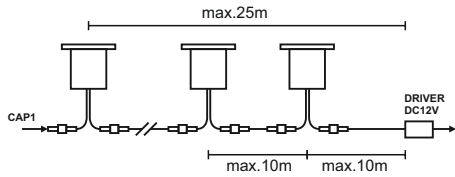



art.nr: **LFL112S**
 typ: FL113/2800K




1 / 10 / 100

40Lm	2800K	DC12V	-30°C +65°C	IP67	Ra ≥ 80	100KG	30.000	50.000 h	0% 100%	Waterproof	<1.0sec	120°	Hg free	UV free
------	-------	-------	----------------	------	---------	-------	--------	----------	---------	------------	---------	------	---------	---------

0.6W

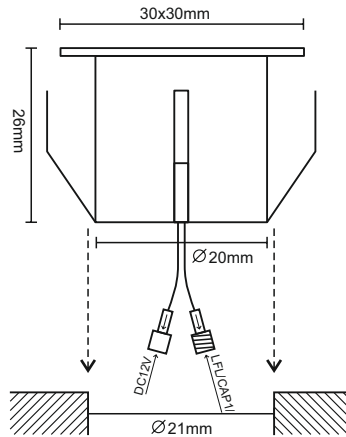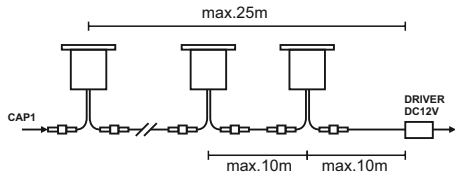

art.nr: **LFL122S**
 typ: FL113/4000K



1 / 10 / 100



40Lm	4000K	DC12V	-30°C +65°C	IP67	Ra ≥ 80	100KG	30.000	50.000 h	0% 100%	Waterproof	<1.0sec	120°	Hg free	UV free
------	-------	-------	----------------	------	---------	-------	--------	----------	---------	------------	---------	------	---------	---------

0.4W



art.nr.: **LFL113**
typ: FL104/2800K

60Lm 2800K DC12V -30°C +65°C IP67 Ra≥80 100KG 30.000 50.000 h 0% 100% <1.0sec 120°

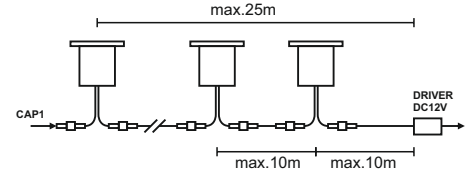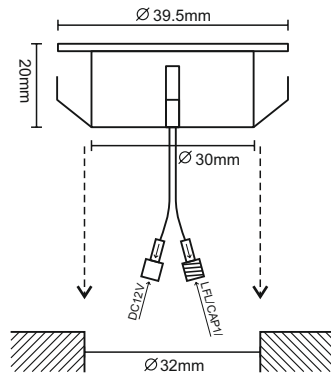

ENERGY LABEL: A++ (A+, A, B, C, D, E), 1 kWh/1000h

1 / 10 / 60





0.4W



art.nr.: **LFL123**
typ: FL104/4000K

60Lm 4000K DC12V -30°C +65°C IP67 Ra≥80 100KG 30.000 50.000 h 0% 100% <1.0sec 120°

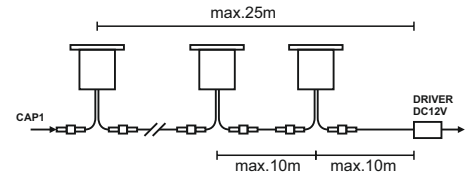
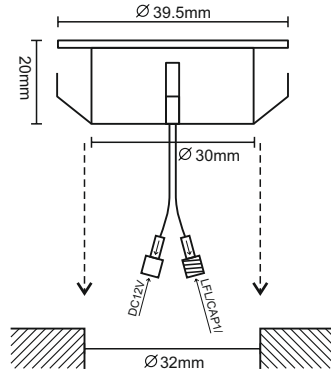


ENERGY LABEL: A++ (A+, A, B, C, D, E), 1 kWh/1000h


1 / 10 / 60



1.5W

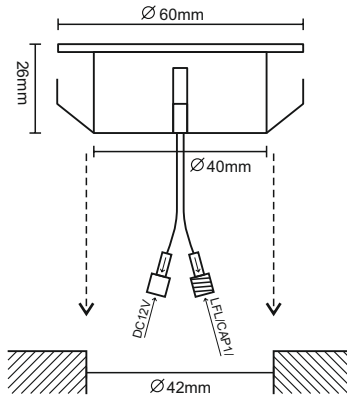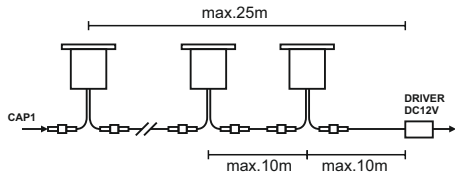



art.nr.: **LFL114**
 ttp: FL105/2800K




1 / 10 / 60

- 110Lm
- 2800K
- DC12V
- 30°C
+65°C
- IP67
- Ra ≥ 80
- 100KG
- 30.000
- 50.000 h
- 0% 100%
-
- <1.0sec
- 120°
- Hg free
- UV free

1.5W

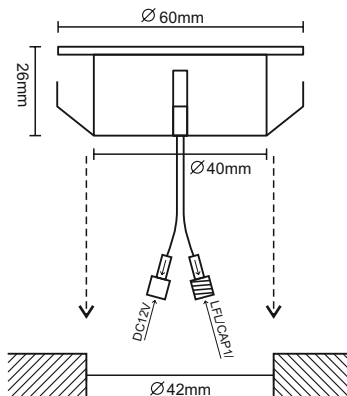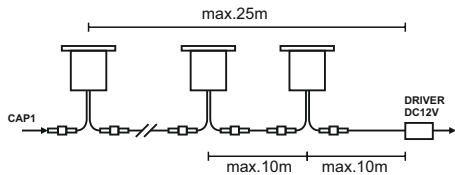



art.nr.: **LFL124**
 ttp: FL105/4000K



1 / 10 / 60

- 110Lm
- 4000K
- DC12V
- 30°C
+65°C
- IP67
- Ra ≥ 80
- 100KG
- 30.000
- 50.000 h
- 0% 100%
-
- <1.0sec
- 120°
- Hg free
- UV free

8W
LED POWER SUPPLY

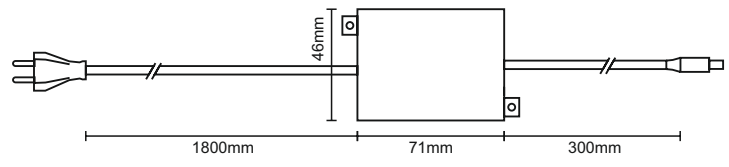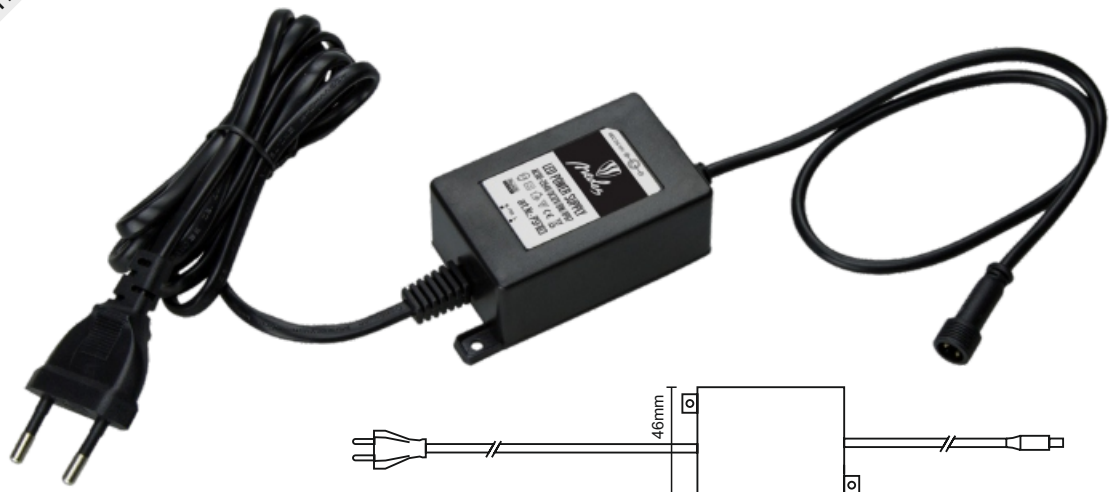

art.nr.: **PSF103**
tup.: PS08/12V


DC12V	AC 90-264V	IP67	-25 °C +60 °C	MAX 8W	
-------	---------------	------	------------------	-----------	--

1 / 5 / 50



USED FOR:
LFL110/LFL120-max.18pcs
LFL111/LFL121-max.12pcs
LFL112/LFL122-max.12pcs
LFL112S/LFL122S-max.12pcs
LFL113/LFL123-max.18pcs
LFL114/LFL124-max.5pcs

30W
LED POWER SUPPLY

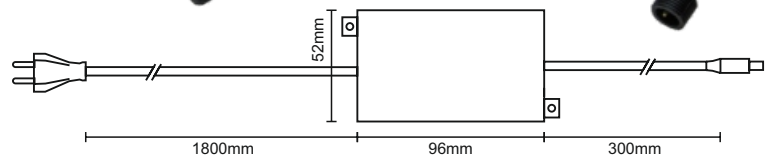

art.nr.: **PSF104**
tup.: PS30/12V


DC12V	AC 90-264V	IP67	-25 °C +60 °C	MAX 30W	
-------	---------------	------	------------------	------------	--

1 / 5 / 50



USED FOR :
LFL110/LFL120-max.65pcs
LFL111/LFL121-max.45pcs
LFL112/LFL122-max.45pcs
LFL112S/LFL122S-max.45pcs
LFL113/LFL123-max.65pcs
LFL114/LFL124-max.18pcs

USED FOR :
 LFL110/LFL120-max.130pcs
 LFL111/LFL121-max.90pcs
 LFL112/LFL122-max.90pcs
 LFL112S/LFL122S-max.90pcs
 LFL113/LFL123-max.130pcs
 LFL114/LFL124-max.36pcs

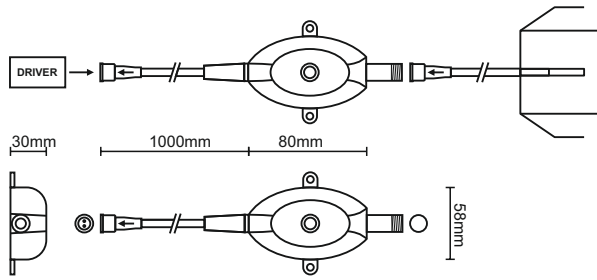

60W
 LIGHT SENSOR



art.nr: **LSF101**
 typ: SL60/12V

DC12V	IP68	-25°C +60°C	MAX 60W		 20.000 h
-------	------	----------------	------------	--	--------------



1 / 5 / 50



art.nr: **WLF102**
 typ: WF2M/12V

DC12V	IP67	2m
-------	------	----



art.nr: **WLF101**
 typ: WF1M/12V

DC12V	IP67	1m
-------	------	----



1 / 100



1 / 100

ACCESS
 EXTENSION CORD



art.nr: **CAPI**
 typ: EC1/IP67

IP67



art.nr: **WLF103**
 typ: WF3M/12V

DC12V	IP67	3m
-------	------	----



1 / 500





1 / 100




art.nr.: **LGL514**
 typ.: GL501/2800K

210 Lm	2800K	AC 85-264V	-30°C +65°C	IP67	Ra≥80	100KG	30.000	50.000 h	0% 100%	LED	<1.0sec	30°	Hg free	UV free
--------	-------	------------	----------------	------	-------	-------	--------	----------	---------	-----	---------	-----	---------	---------

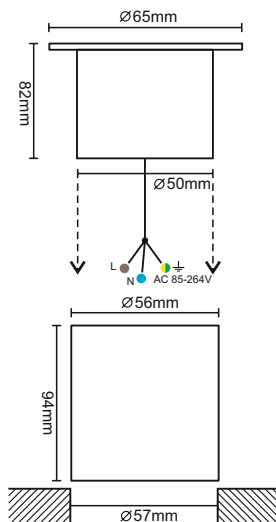


art.nr.: **LGL524**
 typ.: GL501/4000K


220 Lm	4000K	AC 85-264V	-30°C +65°C	IP67	Ra≥80	100KG	30.000	50.000 h	0% 100%	LED	<1.0sec	30°	Hg free	UV free
--------	-------	------------	----------------	------	-------	-------	--------	----------	---------	-----	---------	-----	---------	---------

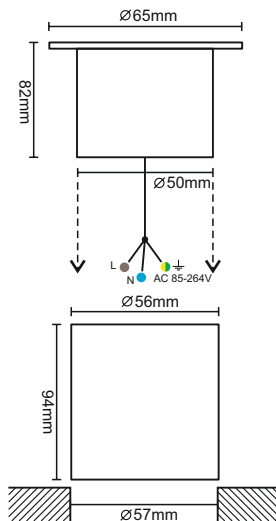

4W

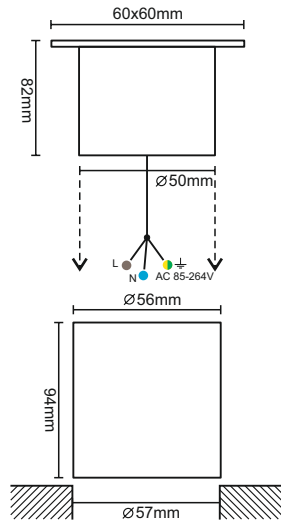


art.nr.: **LGL514S**
 typ: GL511/2800K




1 / 5 / 30

210 Lm	2800K	AC 85-264V	-30°C +65°C	IP67	Ra ≥ 80	100KG	30.000	50.000 h	0% 100%	Waterproof	<1.0sec	30°	Hg free	UV free
--------	-------	------------	----------------	------	---------	-------	--------	----------	---------	------------	---------	-----	---------	---------

4W

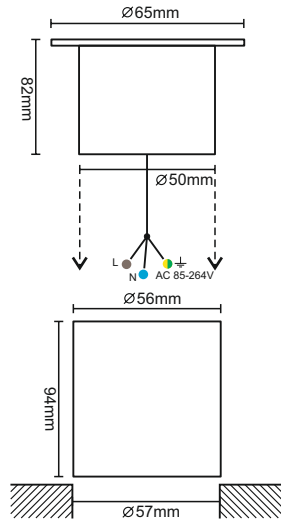

art.nr.: **LGL524S**
 typ: GL511/4000K



1 / 5 / 30


220 Lm	4000K	AC 85-264V	-30°C +65°C	IP67	Ra ≥ 80	100KG	30.000	50.000 h	0% 100%	Waterproof	<1.0sec	30°	Hg free	UV free
--------	-------	------------	----------------	------	---------	-------	--------	----------	---------	------------	---------	-----	---------	---------

3W




art.nr.: **LGL411**
typ.: GL502/2800K

200 Lm	2800K	AC 85-264V	-30°C +65°C	IP67	Ra≥80	30.000	50.000 h	0% 100%	Waterproof	<1.0sec	30°	Hg free	UV free
--------	-------	------------	----------------	------	-------	--------	----------	---------	------------	---------	-----	---------	---------

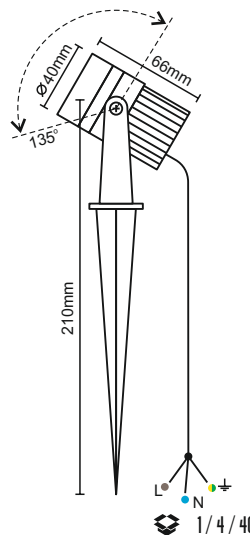

1 / 4 / 40




3W




art.nr.: **LGL421**
typ.: GL502/4000K


210 Lm	4000K	AC 85-264V	-30°C +65°C	IP67	Ra≥80	30.000	50.000 h	0% 100%	Waterproof	<1.0sec	30°	Hg free	UV free
--------	-------	------------	----------------	------	-------	--------	----------	---------	------------	---------	-----	---------	---------

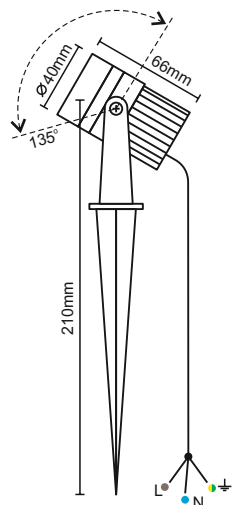


1 / 4 / 40



7W

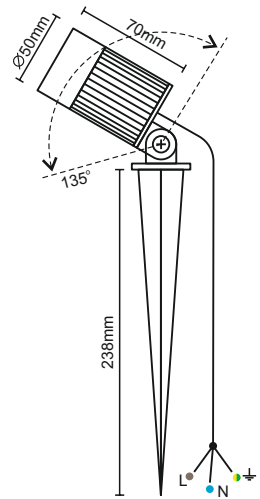


art.nr.: **LGL413**
 typ: GL522/2800K




1 / 4 / 20

- 480 Lm
- 2800K
- AC 85-264V
- 30°C
+65°C
- IP67
- Ra ≥ 80
- 30.000
- 50.000 h
- 0% 100%
-
- <1.0sec
- 30°
- Hg free
- UV free

7W

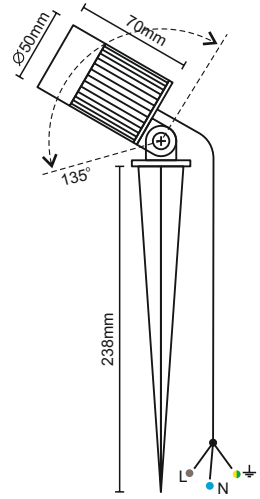


art.nr.: **LGL423**
 typ: GL522/4000K



1 / 4 / 20


- 490 Lm
- 4000K
- AC 85-264V
- 30°C
+65°C
- IP67
- Ra ≥ 80
- 30.000
- 50.000 h
- 0% 100%
-
- <1.0sec
- 30°
- Hg free
- UV free



art.nr.: **CW132**
 typ: C20A/WP/3x1,5/2

AC/DC 250V	IP67	-40°C +105°C	MAX 3x1.5mm	MAX ∅10mm	MAX ↓ 1m
---------------	------	-----------------	----------------	--------------	-------------


1 / 20 / 500

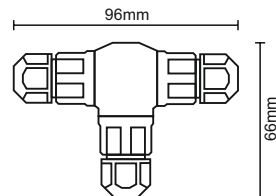

art.nr.: **CW133**
 typ: C20A/WP/3x1,5/3

AC/DC 250V	IP67	-40°C +105°C	MAX 3x1.5mm	MAX ∅10mm	MAX ↓ 1m
---------------	------	-----------------	----------------	--------------	-------------

1 / 10 / 200

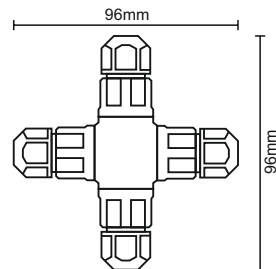

art.nr.: **CW134**
 typ: C20A/WP/3x1,5/4

AC/DC 250V	IP67	-40°C +105°C	MAX 3x1.5mm	MAX ∅10mm	MAX ↓ 1m
---------------	------	-----------------	----------------	--------------	-------------



1 / 5 / 200



10W



art.nr: **LF1021**
typ: F01-10/4000K


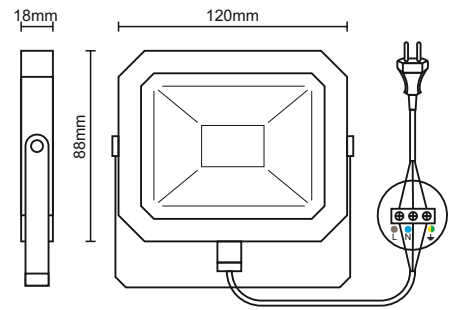


700 Lm	4000K	AC 220-240V	10W 80W	-25°C +45°C	IP65	IK08	25.000	30.000 h	0% 100%	Waterproof	<1.0sec	100°	Hg free	UV free
--------	-------	-------------	---------	-------------	------	------	--------	----------	---------	------------	---------	------	---------	---------

10W





art.nr: **LF1021S**
typ: F01-10/4000K/SE

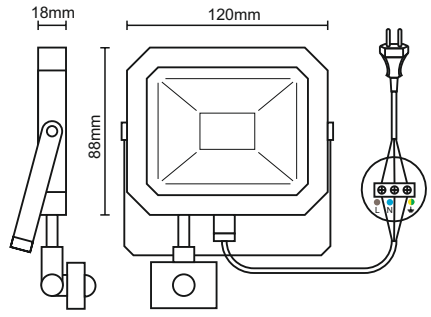

700 Lm	4000K	AC 220-240V	10W 80W	-25°C +45°C	IP44	IK08	25.000	30.000 h	0% 100%	Waterproof	<1.0sec	100°	Hg free	UV free
--------	-------	-------------	---------	-------------	------	------	--------	----------	---------	------------	---------	------	---------	---------

20W

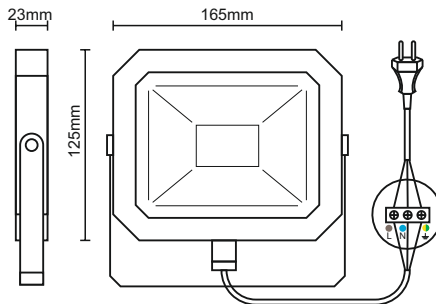



art.nr.: LF1022
тип: FOI-20/4000K

1400 Lm	4000K	AC 220-240V	20W 160W	-25°C +45°C	IP65	IK08	25.000	30.000 h	0% 100%	☔	<1.0sec	100°	Hg free	UV free
---------	-------	-------------	----------	-------------	------	------	--------	----------	---------	---	---------	------	---------	---------

1 / 16



20W

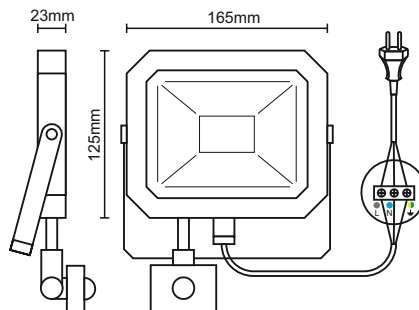

art.nr.: LF1022S
тип: FOI-20/4000K/SE

1400 Lm	4000K	AC 220-240V	20W 160W	-25°C +45°C	IP44	IK08	25.000	30.000 h	0% 100%	☔	<1.0sec	100°	Hg free	UV free
---------	-------	-------------	----------	-------------	------	------	--------	----------	---------	---	---------	------	---------	---------



1 / 10



30W



art.nr.: LF1023
typ: F01-30/4000K

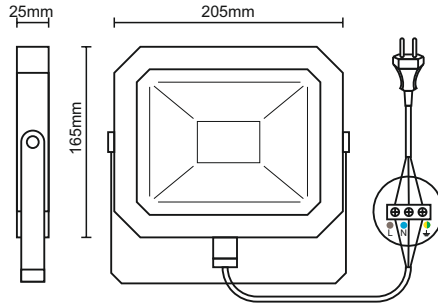

1 / 16

2100 Lm

4000K

AC 220-240V

30W 240W

-25°C +45°C

IP65

IK08

25.000

30.000 h

0% 100%

0

<1.0sec

100°



Hg free

UV free

30W



art.nr.: LF1023S
typ: F01-30/4000K/SE

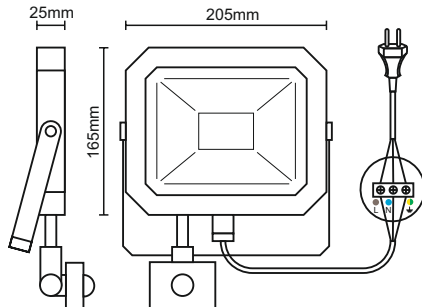

1 / 10

2100 Lm

4000K

AC 220-240V

30W 240W

-25°C +45°C

IP44

IK08

25.000

30.000 h

0% 100%

0



<1.0sec

100°

Hg free

UV free

10W

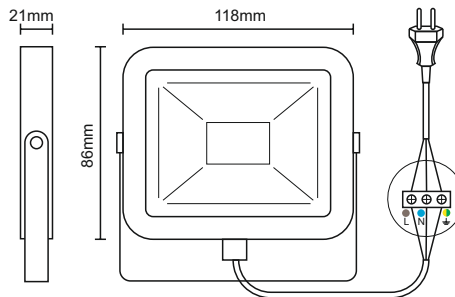

art.nr.: LF2021



tip: F02-10/4000K/BK

900 Lm	4000K	AC 200-265V	10W 90W	-25°C +45°C	IP65	IK08	25.000	30.000 h	0% 100%	Light bulb icon	<1.0sec	120°	Hg free	UV free
--------	-------	-------------	---------	-------------	------	------	--------	----------	---------	-----------------	---------	------	---------	---------

1 / 20



10W

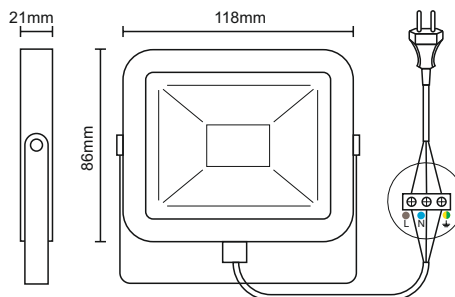

art.nr.: LF2121



tip: F02-10/4000K/WH

900 Lm	4000K	AC 200-265V	10W 90W	-25°C +45°C	IP65	IK08	25.000	30.000 h	0% 100%	Light bulb icon	<1.0sec	120°	Hg free	UV free
--------	-------	-------------	---------	-------------	------	------	--------	----------	---------	-----------------	---------	------	---------	---------

1 / 20



10W

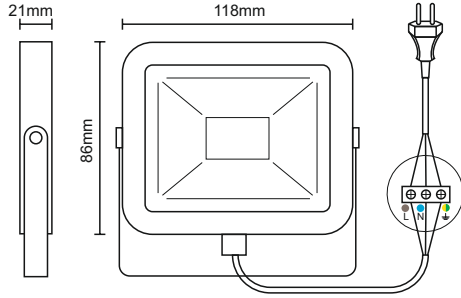



art.nr.: LF2221
typ: F02-10/4000K/GY



- 900 Lm
- 4000K
- AC 200-265V
- 10W 90W
- 25°C +45°C
- IP65
- IK08
- 25.000
- 30.000 h
- 0% 100%
- Waterproof
- <1.0sec
- 120°
- Hg free
- UV free

10W

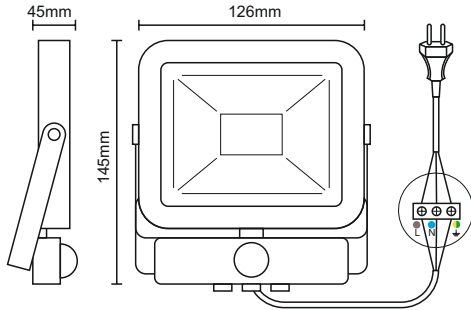



art.nr.: LF2021S
typ: F02-10/4000K/BK/PS



- 900 Lm
- 4000K
- AC 200-265V
- 10W 90W
- 25°C +45°C
- IP65
- IK08
- 25.000
- 30.000 h
- 0% 100%
- Waterproof
- <1.0sec
- 120°
- Hg free
- UV free

20W

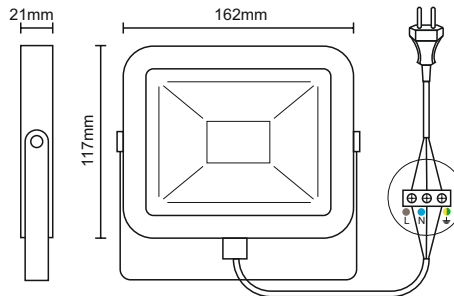

art.nr.: LF2022



tip: F02-20/4000K/BK

1800 Lm	4000K	AC 200-265V	20W 180W	-25°C +45°C	IP65	IK08	25.000	30.000 h	0% 100%	Waterproof	<1.0sec	120°	Hg free	UV free
---------	-------	-------------	----------	-------------	------	------	--------	----------	---------	------------	---------	------	---------	---------

1 / 20



20W

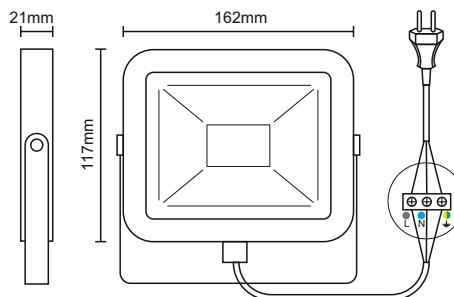

art.nr.: LF2122

tip: F02-20/4000K/WH

1800 Lm	4000K	AC 200-265V	20W 180W	-25°C +45°C	IP65	IK08	25.000	30.000 h	0% 100%	Waterproof	<1.0sec	120°	Hg free	UV free
---------	-------	-------------	----------	-------------	------	------	--------	----------	---------	------------	---------	------	---------	---------

1 / 20





20W



art.nr: LF2222

tip: F02-20/4000K/GY

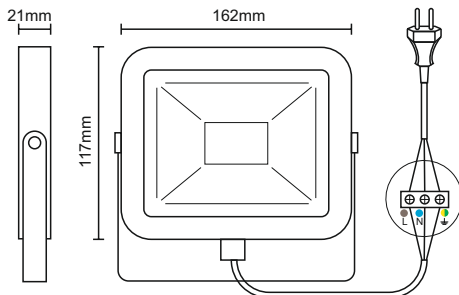

1 / 20



1800 Lm	4000K	AC 200-265V	20W 180W	-25°C +45°C	IP65	IK08	25.000	30.000 h	0% 100%	Waterproof	<1.0sec	120°	Hg free	UV free
---------	-------	-------------	----------	-------------	------	------	--------	----------	---------	------------	---------	------	---------	---------

20W



art.nr: LF2022H



tip: F02-20/4000K/BK/H

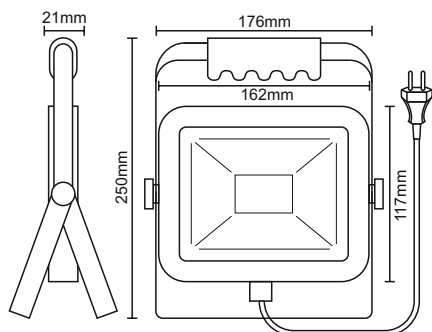

1 / 10

1800 Lm	4000K	AC 200-265V	20W 180W	-25°C +45°C	IP44	IK08	25.000	30.000 h	0% 100%	Waterproof	<1.0sec	120°	Hg free	UV free
---------	-------	-------------	----------	-------------	------	------	--------	----------	---------	------------	---------	------	---------	---------

20W

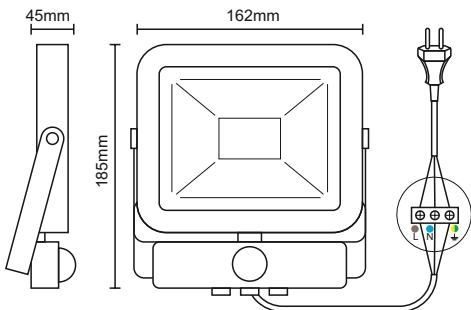

art.nr.: LF2022S



tip: F02-20/4000K/BK/PS

- 1800 Lm
- 4000K
- AC 200-265V
- 20W 180W
- 25°C +45°C
- IP65
- IK08
- 25.000
- 30.000 h
- 0% 100%
- Light bulb icon
- <1.0sec
- 120°
- Hg free
- UV free

1 / 20



20W

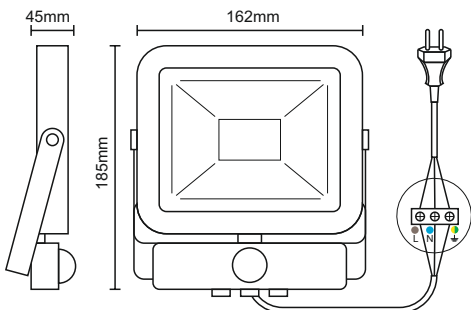

art.nr.: LF2122S



tip: F02-20/4000K/WH/PS

- 1800 Lm
- 4000K
- AC 200-265V
- 20W 180W
- 25°C +45°C
- IP65
- IK08
- 25.000
- 30.000 h
- 0% 100%
- Light bulb icon
- <1.0sec
- 120°
- Hg free
- UV free

1 / 20



20W

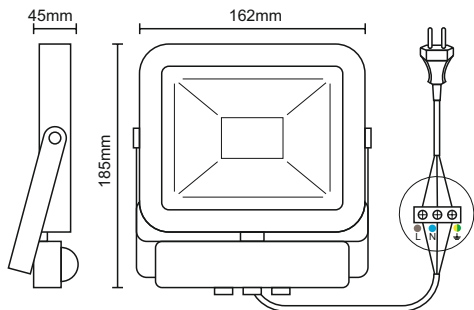



art.nr: LF2022MS
tup: F02-20/4000K/BK/MS



1 / 20

1800 Lm	4000K	AC 200-265V	20W 180W	-25°C +45°C	IP65	IK08	25.000	30.000 h	0% 100%	Waterproof	<1.0sec	120°	Hg free	UV free
---------	-------	-------------	----------	-------------	------	------	--------	----------	---------	------------	---------	------	---------	---------

30W

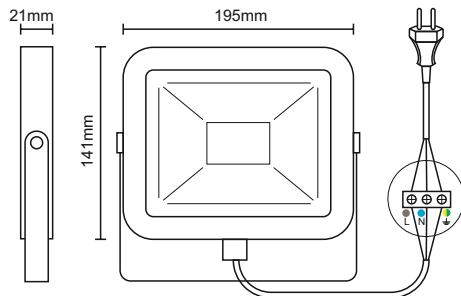



art.nr: LF2023
tup: F02-30/4000K/BK



1 / 10

2700 Lm	4000K	AC 200-265V	30W 270W	-25°C +45°C	IP65	IK08	25.000	30.000 h	0% 100%	Waterproof	<1.0sec	120°	Hg free	UV free
---------	-------	-------------	----------	-------------	------	------	--------	----------	---------	------------	---------	------	---------	---------

30W

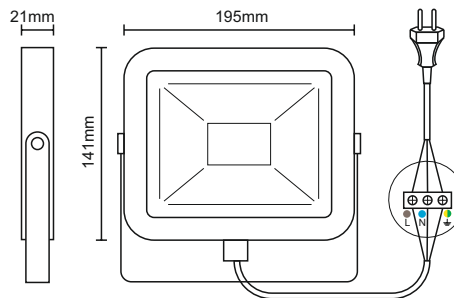

art.nr.: LF2123



tup: F02-30/4000K/WH

2700 Lm	4000K	AC 200-265V	30W 270W	-25°C +45°C	IP65	IK08	25.000	30.000 h	0% 100%	Waterproof	<1.0sec	120°	Hg free	UV free
---------	-------	-------------	----------	-------------	------	------	--------	----------	---------	------------	---------	------	---------	---------

1 / 10



30W

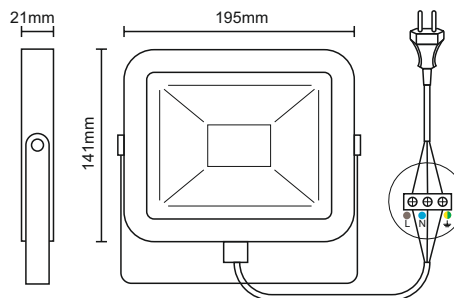

art.nr.: LF2223



tup: F02-30/4000K/GY

2700 Lm	4000K	AC 200-265V	30W 270W	-25°C +45°C	IP65	IK08	25.000	30.000 h	0% 100%	Waterproof	<1.0sec	120°	Hg free	UV free
---------	-------	-------------	----------	-------------	------	------	--------	----------	---------	------------	---------	------	---------	---------

1 / 10



30W

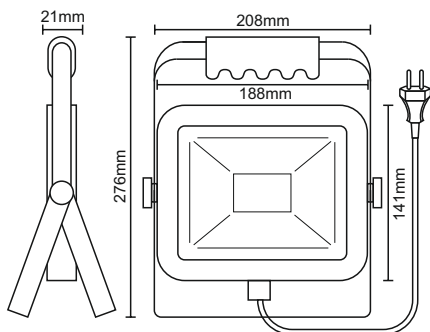



art.nr: **LF2023H**

tip: F02-30/4000K/BK/H



1 / 10

2700 Lm	4000K	AC 200-265V 270W	30W 270W	-25°C +45°C	IP44	IK08	25.000	30.000 h	0% 100%	Light bulb icon	<1.0sec	120°	Hg free	UV free
---------	-------	---------------------	-------------	----------------	------	------	--------	----------	---------	-----------------	---------	------	---------	---------

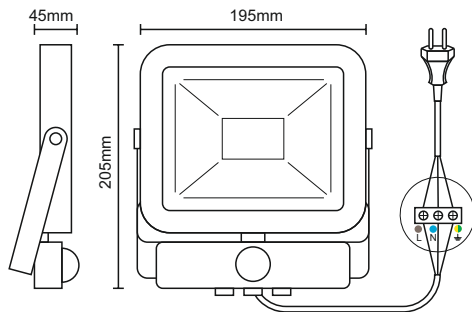

art.nr: **LF2023S**



tip: F02-30/4000K/BK/PS



1 / 10

2700 Lm	4000K	AC 200-265V 270W	30W 270W	-25°C +45°C	IP65	IK08	25.000	30.000 h	0% 100%	Light bulb icon	<1.0sec	120°	Hg free	UV free
---------	-------	---------------------	-------------	----------------	------	------	--------	----------	---------	-----------------	---------	------	---------	---------

50W

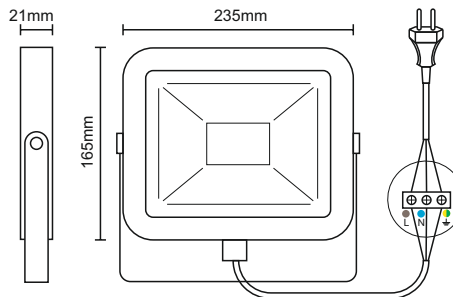

art.nr.: LF2024



tup: F02-50/4000K/BK

4500 Lm	4000K	AC 200-265V	50W / 450W	-25°C / +45°C	IP65	IK08	25.000	30.000 h	0% / 100%	Waterproof	<1.0sec	120°	Hg free	UV free
---------	-------	-------------	------------	---------------	------	------	--------	----------	-----------	------------	---------	------	---------	---------

1 / 10



50W

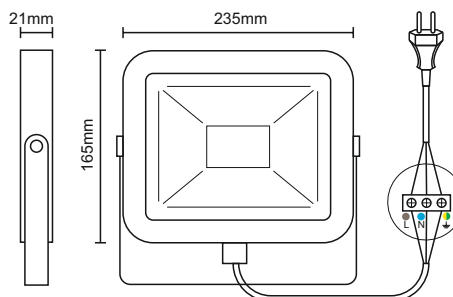

art.nr.: LF2124



tup: F02-50/4000K/WH

4500 Lm	4000K	AC 200-265V	50W / 450W	-25°C / +45°C	IP65	IK08	25.000	30.000 h	0% / 100%	Waterproof	<1.0sec	120°	Hg free	UV free
---------	-------	-------------	------------	---------------	------	------	--------	----------	-----------	------------	---------	------	---------	---------

1 / 10



50W

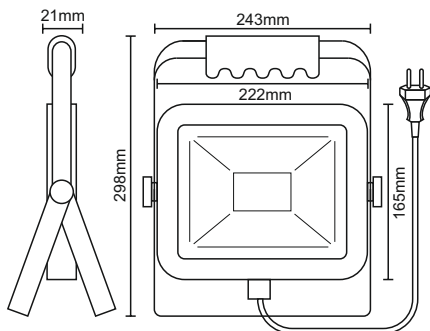

art.nr: LF2024H



tup: F02-50/4000K/BK/H



1 / 10

4500 Lm	4000K	AC 200-265V	50W 450W	-25°C +45°C	IP44	IK08	25.000	30.000 h	0% 100%	Waterproof	<1.0sec	120°	Hg free	UV free
---------	-------	-------------	----------	-------------	------	------	--------	----------	---------	------------	---------	------	---------	---------

50W

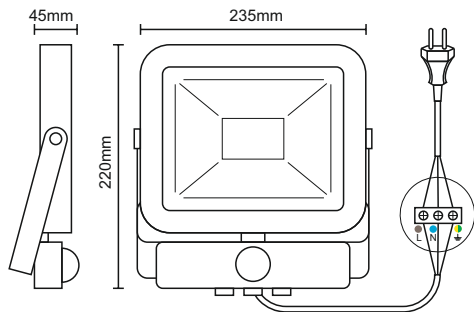

art.nr: LF2024S



tup: F02-50/4000K/BK/PS



1 / 10

4500 Lm	4000K	AC 200-265V	50W 450W	-25°C +45°C	IP65	IK08	25.000	30.000 h	0% 100%	Waterproof	<1.0sec	120°	Hg free	UV free
---------	-------	-------------	----------	-------------	------	------	--------	----------	---------	------------	---------	------	---------	---------

100W

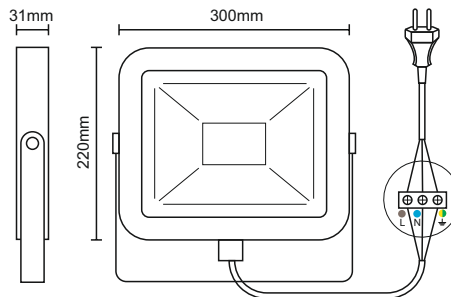

art.nr.: LF2025
tup: F02-100/4000K/BK

8500 Lm | 4000K | AC 200-265V | 100W / 850W | -25°C / +45°C | IP65 | IK08 | 25.000 | 30.000 h | 0% / 100% | | <1.0sec | 120° | Hg free | UV free

1 / 5



ACCESS. BRACKET



art.nr.: BB01
tup: BIB/80/BK



80cm

used for:
LF2 series (10 - 100W)

1 / 18



30W
PROFI PLUS

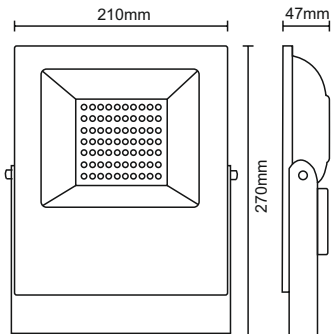



art.nr: **LF4023**
тип: F04-30/5000K/BK



1 / 10

3600 Lm	5000K	AC 100-277V	30W / 350W	-25°C / +50°C	IP65	IK06	30.000	50.000 h	0% / 100%	Waterproof	<1.0sec	80x150°	Hg free	UV free
---------	-------	-------------	------------	---------------	------	------	--------	----------	-----------	------------	---------	---------	---------	---------

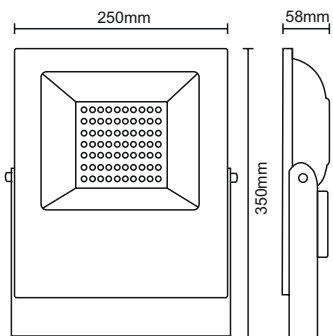



art.nr: **LF4024**
тип: F04-50/5000K/BK



1 / 5

6000 Lm	5000K	AC 100-277V	50W / 600W	-25°C / +50°C	IP65	IK06	30.000	50.000 h	0% / 100%	Waterproof	<1.0sec	80x150°	Hg free	UV free
---------	-------	-------------	------------	---------------	------	------	--------	----------	-----------	------------	---------	---------	---------	---------

100W
PROFIT PLUS


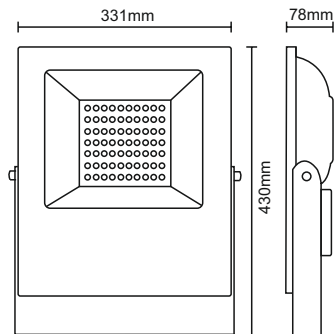


art.nr.: **LF4025**
tvp: F04-100/5000K/BK

12000 Lm	5000K	AC 100-277V	100W / 1200W	-25°C / +50°C	IP65	IK06	30.000	50.000 h	0% / 100%	☔	<1.0sec	80x150°	Hg free	UV free
----------	-------	-------------	--------------	---------------	------	------	--------	----------	-----------	---	---------	---------	---------	---------



200W
PROFIT PLUS

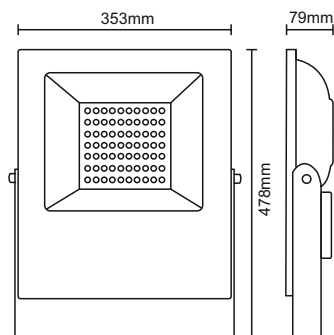


art.nr.: **LF4027**
tvp: F04-200/5000K/BK

24000 Lm	5000K	AC 100-277V	200W / 2400W	-25°C / +50°C	IP65	IK06	30.000	50.000 h	0% / 100%	☔	<1.0sec	80x150°	Hg free	UV free
----------	-------	-------------	--------------	---------------	------	------	--------	----------	-----------	---	---------	---------	---------	---------




30W
PROFI EXTRA



EOKE
DRIVER

LED
Philips

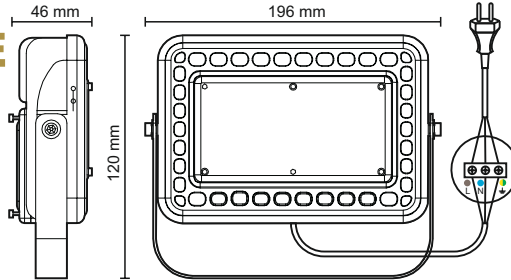


art.nr.: LF5023
tup: F05-30/5000K/BK



1 / 20


3600 Lm	5000K	AC 180-305V	30W 350W	-25°C +50°C	IP65	IK08	30.000	50.000 h	0% 100%	Waterproof	<1.0sec	70x105°	Hg free	UV free
---------	-------	-------------	----------	-------------	------	------	--------	----------	---------	------------	---------	---------	---------	---------

50W
PROFI EXTRA



SOSEN
DRIVER

LED
Philips

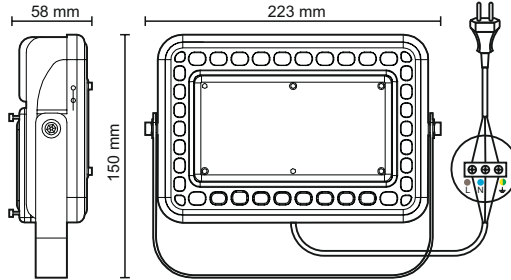


art.nr.: LF5024
tup: F05-50/5000K/BK



1 / 20


6000 Lm	5000K	AC 180-305V	50W 600W	-25°C +50°C	IP65	IK08	30.000	50.000 h	0% 100%	Waterproof	<1.0sec	70x105°	Hg free	UV free
---------	-------	-------------	----------	-------------	------	------	--------	----------	---------	------------	---------	---------	---------	---------

100W
PROFI EXTRA



SOSEN
DRIVER

LED
Philips

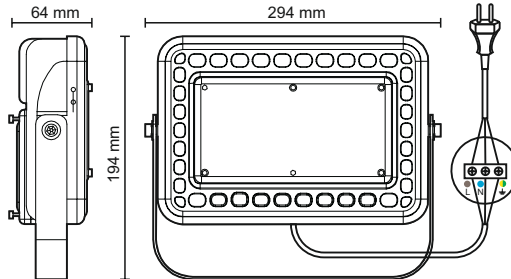

art.nr.: LF5025
tup: F05-100/5000K/BK



1 / 10


12000 Lm	5000K	AC 180-305V	100W 1200W	-25°C +50°C	IP65	IK08	30.000	50.000 h	0% 100%	Waterproof	<1.0sec	70x105°	Hg free	UV free
----------	-------	-------------	------------	-------------	------	------	--------	----------	---------	------------	---------	---------	---------	---------

7W




art.nr.: ZLS571

tup: A60/E27/7W/300/3000K

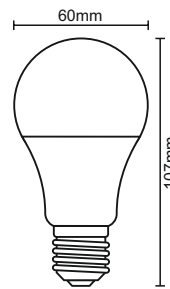

1 / 10 / 100




7W




art.nr.: ZLS581

tup: A60/E27/7W/300/4000K

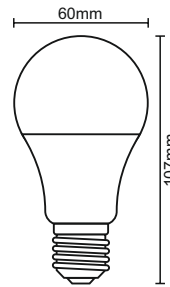

1 / 10 / 100




7W




art.nr.: ZLS561



tup: A60/E27/7W/300/6000K

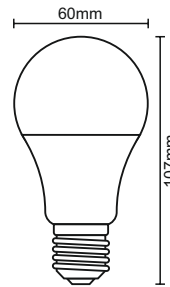

1 / 10 / 100



10W

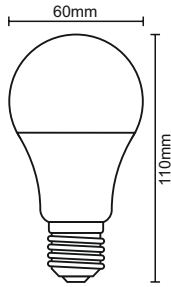

art.nr.: ZLS572



typ: A60/E27/10W/300/3000K



1 / 10 / 100



10W

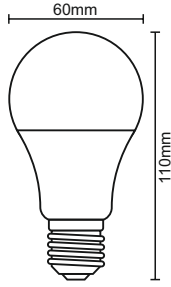

art.nr.: ZLS582



typ: A60/E27/10W/300/4000K



1 / 10 / 100



10W

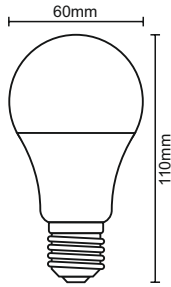

art.nr.: ZLS562

typ: A60/E27/10W/300/6000K



1 / 10 / 100




12W



art.nr.: ZLS513

tup: A60/E27/12W/270/3000K



1 / 10 / 100



ENERGY LABEL: A+ (12 kWh/1000h)




12W



art.nr.: ZLS523

tup: A60/E27/12W/270/4000K



1 / 10 / 100



ENERGY LABEL: A+ (12 kWh/1000h)




12W



art.nr.: ZLS503

tup: A60/E27/12W/270/6000K





1 / 10 / 100



ENERGY LABEL: A+ (12 kWh/1000h)



15W

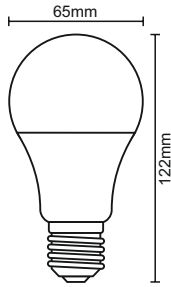

art.nr.: ZLS515

typ: A65/E27/15W/270/3000K



1 / 10 / 100



1320 Lm

3000K

AC 165-265V



IP20

Ra ≥ 80



30.000 h





<1.0sec



Hg free

UV free

15W

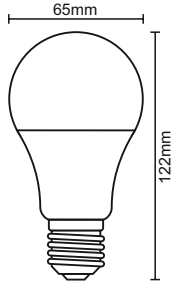

art.nr.: ZLS525

typ: A65/E27/15W/270/4000K



1 / 10 / 100



1350 Lm

4000K

AC 165-265V



IP20

Ra ≥ 80



30.000 h





<1.0sec



Hg free

UV free

15W

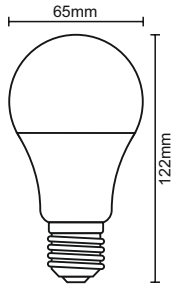

art.nr.: ZLS505

typ: A65/E27/15W/270/6000K



1 / 10 / 100



1380 Lm

6000K

AC 165-265V



IP20

Ra ≥ 80



30.000 h



<1.0sec



Hg free

UV free

18W




art.nr.: ZLS517

tup: A80/E27/18W/270/3000K/PAB/MC



1 / 5 / 50



18W




art.nr.: ZLS527

tup: A80/E27/18W/270/4000K/PAB/MC



1 / 5 / 50



18W




art.nr.: ZLS507



tup: A80/E27/18W/270/6000K/PAB/MC



1 / 5 / 50



22W

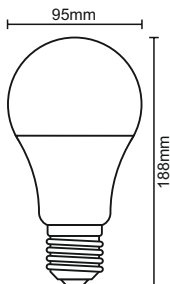

art.nr.: ZLS519



tvp: A95/E27/22W/240/3000K/PAB/MC



1 / 5 / 50

	2000 Lm	3000K	AC 165-265V	 22W 150W	IP20	Ra ≥ 80	 20.000	 30.000 h	 0% 100%	 <1.0sec	 240°		
--	----------------	--------------	-----------------------	-----------------	-------------	----------------	------------	--------------	-------------	-------------	----------	--	--

22W

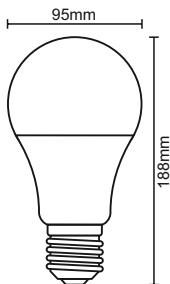

art.nr.: ZLS529



tvp: A95/E27/22W/240/4000K/PAB/MC



1 / 5 / 50

	2070 Lm	4000K	AC 165-265V	 22W 150W	IP20	Ra ≥ 80	 20.000	 30.000 h	 0% 100%	 <1.0sec	 240°		
--	----------------	--------------	-----------------------	-----------------	-------------	----------------	------------	--------------	-------------	-------------	----------	--	--

22W

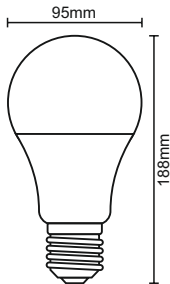

art.nr.: ZLS509



tvp: A95/E27/22W/240/6000K/PAB/MC



1 / 5 / 50

	2100 Lm	6000K	AC 165-265V	 22W 150W	IP20	Ra ≥ 80	 20.000	 30.000 h	 0% 100%	 <1.0sec	 240°		
--	----------------	--------------	-----------------------	-----------------	-------------	----------------	------------	--------------	-------------	-------------	----------	--	--

18W

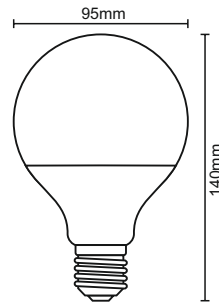



art.nr.: ZLS912

typ: G95/E27/18W/300/3000K/PAB/MC

1 / 32



18W

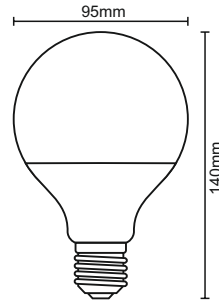


art.nr.: ZLS922

typ: G95/E27/18W/300/4000K/PAB/MC

1 / 32




20W

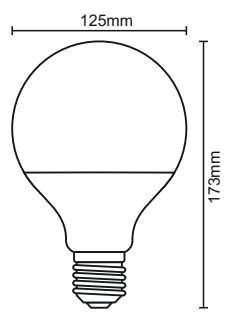

art.nr.: ZLS914


typ: G125/E27/20W/300/3000K/PAB/MC



1 / 24


											<1.0sec icon"/>			
--	--	--	--	--	--	--	--	--	--	--	-----------------	--	--	--

20W

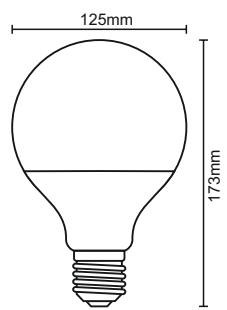

art.nr.: ZLS924

typ: G125/E27/20W/300/4000K/PAB/MC



1 / 24

--	--	--	--	--	--	--	--	--	--	--	--	--	--	--

5W





art.nr.: ZLS712

tup: C37/E14/5W/SMD/2835/3000K/PAB/MC



1 / 10 / 100



5W





art.nr.: ZLS722

tup: C37/E14/5W/SMD/2835/4000K/PAB/MC



1 / 10 / 100



5W





art.nr.: ZLS702



tup: C37/E14/5W/SMD/2835/6000K/PAB/MC



1 / 10 / 100



8W



art.nr.: ZLS714



tup: C37/E14/8W/SMD/2835/3000K/PAB/MC



1 / 10 / 100

	710 Lm	3000K	AC 165-265V	 8W 60W	IP20	Ra ≥ 80	 20.000	 30.000 h	 0% 100%		 <1.0sec	 160°		
--	---------------	--------------	-----------------------	---------------	-------------	----------------	------------	--------------	-------------	--	-------------	----------	--	--

8W



art.nr.: ZLS724



tup: C37/E14/8W/SMD/2835/4000K/PAB/MC



1 / 10 / 100

	720 Lm	4000K	AC 165-265V	 8W 65W	IP20	Ra ≥ 80	 20.000	 30.000 h	 0% 100%		 <1.0sec	 160°		
--	---------------	--------------	-----------------------	---------------	-------------	----------------	------------	--------------	-------------	--	-------------	----------	--	--

8W



art.nr.: ZLS704

tup: C37/E14/8W/SMD/2835/6000K/PAB/MC



1 / 10 / 100


	720 Lm	6000K	AC 165-265V	 8W 65W	IP20	Ra ≥ 80	 20.000	 30.000 h	 0% 100%		 <1.0sec	 160°		
--	---------------	--------------	-----------------------	---------------	-------------	----------------	------------	--------------	-------------	--	-------------	----------	--	--

5W




art.nr.: ZLS812

tup: G45/E14/5W/SMD/2835/3000K/PAB/MC

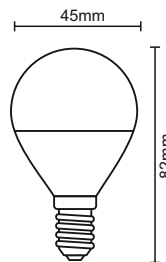

1 / 10 / 100




5W




art.nr.: ZLS822

tup: G45/E14/5W/SMD/2835/4000K/PAB/MC

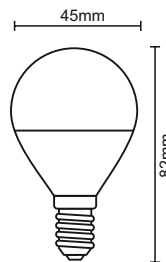

1 / 10 / 100




5W




art.nr.: ZLS802



tup: G45/E14/5W/SMD/2835/6000K/PAB/MC

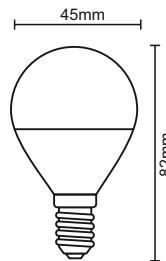

1 / 10 / 100



8W

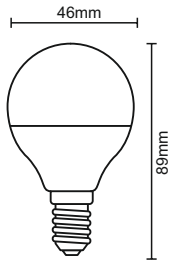

art.nr.: ZLS814



tip: G45/E14/8W/SMD/2835/3000K/PAB/MC



1 / 10 / 100



8W

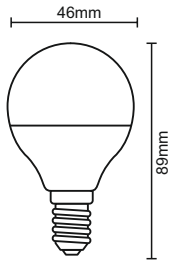

art.nr.: ZLS824



tip: G45/E14/8W/SMD/2835/4000K/PAB/MC



1 / 10 / 100



8W

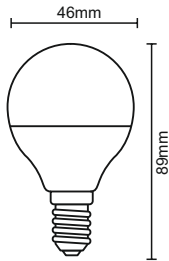

art.nr.: ZLS804

tip: G45/E14/8W/SMD/2835/6000K/PAB/MC



1 / 10 / 100




5W




art.nr.: ZLS817

tvp: G45/E27/5W/SMD/2835/3000K/PAB/MC



1 / 10 / 100




5W




art.nr.: ZLS827

tvp: G45/E27/5W/SMD/2835/4000K/PAB/MC



1 / 10 / 100




5W




art.nr.: ZLS807



tvp: G45/E27/5W/SMD/2835/6000K/PAB/MC



1 / 10 / 100



8W

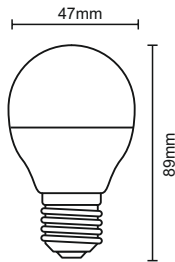

art.nr.: ZLS819



tip: G45/E27/8W/SMD/2835/3000K/PAB/MC



1 / 10 / 100

	710 Lm	3000K	AC 165-265V	 8W 60W	IP20	Ra ≥ 80	 20.000	 30.000 h	 0% 100%		 <1.0sec	 160°		
--	---------------	--------------	-----------------------	---------------	-------------	----------------	------------	--------------	-------------	--	-------------	----------	--	--

8W

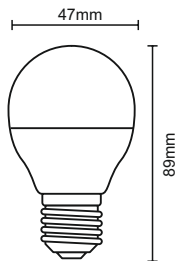

art.nr.: ZLS829


tip: G45/E27/8W/SMD/2835/4000K/PAB/MC



1 / 10 / 100

	720 Lm	4000K	AC 165-265V	 8W 65W	IP20	Ra ≥ 80	 20.000	 30.000 h	 0% 100%		 <1.0sec	 160°		
--	---------------	--------------	-----------------------	---------------	-------------	----------------	------------	--------------	-------------	--	-------------	----------	--	--

8W

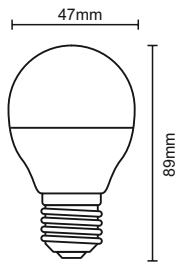

art.nr.: ZLS809



tip: G45/E27/8W/SMD/2835/6000K/PAB/MC



1 / 10 / 100

	720 Lm	6000K	AC 165-265V	 8W 65W	IP20	Ra ≥ 80	 20.000	 30.000 h	 0% 100%		 <1.0sec	 160°		
--	---------------	--------------	-----------------------	---------------	-------------	----------------	------------	--------------	-------------	--	-------------	----------	--	--

5W

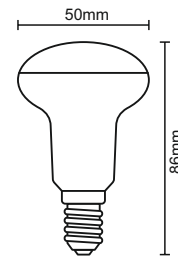

art.nr.: ZLS213



typ: R50/E14/5W/SMD/2835/3000K/PAB/MC

1 / 10 / 100

--	--	--	--	--	--	--	--	--	--	--	--	--	--	--



5W

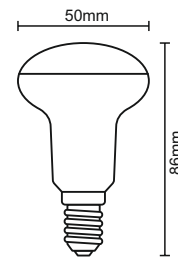

art.nr.: ZLS223



typ: R50/E14/5W/SMD/2835/4000K/PAB/MC

1 / 10 / 100

--	--	--	--	--	--	--	--	--	--	--	--	--	--	--



7W

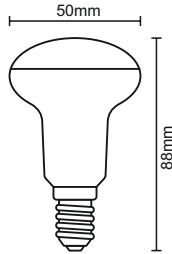



art.nr.: ZLS214

тип: R50/E14/9SMD/2835/2800K/PAB/MC



1 / 10 / 100

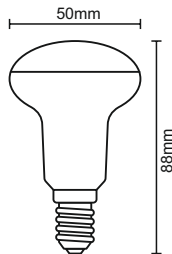

art.nr.: ZLS204

тип: R50/E14/9SMD/2835/6000K/PAB/MC



1 / 10 / 100




7W

3W



art.nr.: ZLS112

typ: GU10/3W/SMD/2835/3000K/PB/MC



ENERGY LABEL

Y UA IE IA

енергия - енергія

A⁺ A⁺ A A B C D E

3 kWh/1000h




3W



art.nr.: ZLS122

typ: GU10/3W/SMD/2835/4000K/PB/MC



ENERGY LABEL

Y UA IE IA

енергия - енергія

A⁺ A⁺ A A B C D E

3 kWh/1000h




3W



art.nr.: ZLS102

typ: GU10/3W/SMD/2835/6000K/PB/MC



ENERGY LABEL

Y UA IE IA



енергия - енергія

A⁺ A⁺ A A B C D E

3 kWh/1000h



6W



art.nr.: ZLS116



tip: GU10/6W/SMD/2835/3000K/PAB/MC



1 / 10 / 100

	450 Lm	3000K	AC 165-265V	 6W 50W	IP20	Ra ≥ 80	 20.000	 30.000 h	 0% 100%		 <1.0sec	 120°		
--	---------------	--------------	-----------------------	---------------	-------------	----------------	------------	--------------	-------------	--	-------------	----------	--	--

6W



art.nr.: ZLS126



tip: GU10/6W/SMD/2835/4000K/PAB/MC



1 / 10 / 100

	480 Lm	4000K	AC 165-265V	 6W 50W	IP20	Ra ≥ 80	 20.000	 30.000 h	 0% 100%		 <1.0sec	 120°		
--	---------------	--------------	-----------------------	---------------	-------------	----------------	------------	--------------	-------------	--	-------------	----------	--	--

6W



art.nr.: ZLS106

tip: GU10/6W/SMD/2835/6000K/PAB/MC



1 / 10 / 100

	500 Lm	6000K	AC 165-265V	 6W 50W	IP20	Ra ≥ 80	 20.000	 30.000 h	 0% 100%		 <1.0sec	 120°		
--	---------------	--------------	-----------------------	---------------	-------------	----------------	------------	--------------	-------------	--	-------------	----------	--	--





art.nr.: ZLS117

typ: GU10/7W/SMD/2835/3000K/PAB/MC



1 / 10 / 100



7W




art.nr.: ZLS127

typ: GU10/7W/SMD/2835/4000K/PAB/MC



1 / 10 / 100



7W





art.nr.: ZLS107



typ: GU10/7W/SMD/2835/6000K/PAB/MC



1 / 10 / 100



8W



art.nr.: ZLS118



typ: GU10/8W/SMD/2835/3000K/PAB/MC



1 / 10 / 100



8W



art.nr.: ZLS128



typ: GU10/8W/SMD/2835/4000K/PAB/MC



1 / 10 / 100



8W



art.nr.: ZLS108

typ: GU10/8W/SMD/2835/6000K/PAB/MC



1 / 10 / 100




5W



art.nr.: ZLS012C

tup: E14/64SMD/2835/2800K/CB

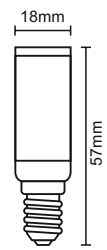

ENERGY LABEL: A+, A, A, B, C, D, E. 5 kWh/1000h




5W



art.nr.: ZLS022C

tup: E14/64SMD/2835/4000K/CB



ENERGY LABEL: A+, A, A, B, C, D, E. 5 kWh/1000h




1.5W



art.nr.: ZLS001



tup: RE/E14/SMD/6000K/MC

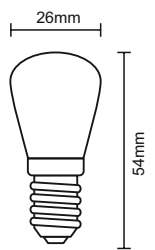

ENERGY LABEL: A+, A, A, B, C, D, E. 2 kWh/1000h



7W



art.nr.: ZLS013C



tvp: E14/88SMD/2835/2800K/CB



1 / 100 / 500



7W



art.nr.: ZLS023C

tvp: E14/88SMD/2835/4000K/CB



1 / 100 / 500



4W
DIMMABLE





art.nr.: ZLS614CD

typ: G9/45SMD/2835/2800K/CB/MC/D



1 / 100 / 1000

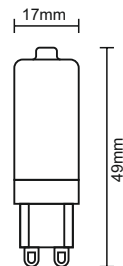

4W
DIMMABLE



art.nr.: ZLS624CD

typ: G9/45SMD/2835/4000K/CB/MC/D



1 / 100 / 1000



4W
DIMMABLE




art.nr.: ZLS604CD



typ: G9/45SMD/2835/6000K/CB/MC/D



1 / 100 / 1000



4W

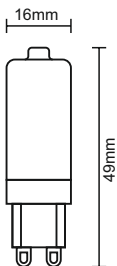

art.nr.: ZLS614C



tvp: G9/51SMD/2835/2800K/CB/MC



1 / 100 / 1000



4W

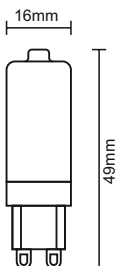

art.nr.: ZLS624C



tvp: G9/51SMD/2835/4000K/CB/MC



1 / 100 / 1000



4W

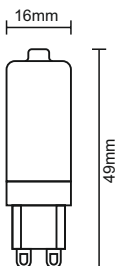

art.nr.: ZLS604C



tvp: G9/51SMD/2835/6000K/CB/MC



1 / 100 / 1000



5W





art.nr.: ZLS615CW

typ: G9/52SMD/2835/2800K/CB/W



1 / 10 / 400

5W





art.nr.: ZLS625CW

typ: G9/52SMD/2835/4000K/CB/W



1 / 10 / 400

5W

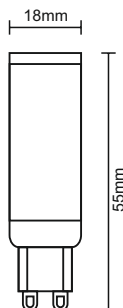

art.nr.: ZLS615C



tvp: G9/64SMD/2835/2800K/CB



1 / 100 / 500



5W

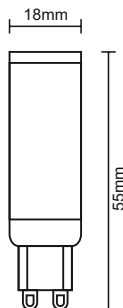

art.nr.: ZLS625C



tvp: G9/64SMD/2835/4000K/CB



1 / 100 / 500



7W

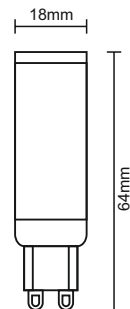



art.nr.: ZLS616C

typ: G9/88SMD/2835/2800K/CB



1 / 100 / 500

7W

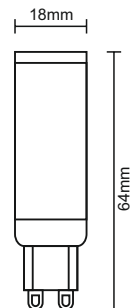



art.nr.: ZLS626C

typ: G9/88SMD/2835/4000K/CB



1 / 100 / 500

2W



art.nr.: ZLS410


тип: G4/2W/2835/2800K/CB/MC



1 / 100 / 1000



2W



art.nr.: ZLS420



тип: G4/2W/2835/4000K/CB/MC



1 / 100 / 1000



5W

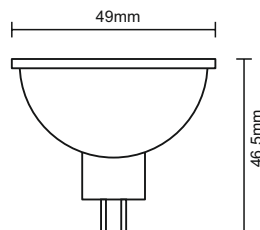

art.nr.: ZLS313



tip: MR16/GU5.3/5W/SMD/2835/3000K/PAB/MC



1 / 10 / 100



5W

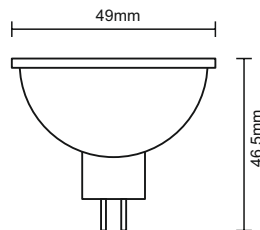

art.nr.: ZLS323



tip: MR16/GU5.3/5W/SMD/2835/4000K/PAB/MC



1 / 10 / 100



10W



art.nr.: **TLS221**



typ: T8/600/42SMD/2835/4100K



1 / 25

- G13
- 970 Lm
- 4100K
- AC 100-240V
- 20°C to +45°C
- IP50
- Ra ≥ 80
- 20.000
- 30.000 h
- 0% to 100%
- Mercury-free
- <1.0sec
- 300°
- Hg free
- UV free

10W



art.nr.: **TLS201**


typ: T8/600/42SMD/2835/6500K



1 / 25

- G13
- 980 Lm
- 6500K
- AC 100-240V
- 20°C to +45°C
- IP50
- Ra ≥ 80
- 20.000
- 30.000 h
- 0% to 100%
- Mercury-free
- <1.0sec
- 300°
- Hg free
- UV free

18W




art.nr.: **TLS222**


typ: T8/1200/88SMD/2835/4100K

	1850 Lm	4100K	AC 100-240V	-20 °C +45 °C	IP50	Ra=80								
G13	1850	4100K	AC	-20 °C +45 °C	IP50	Ra=80	20.000	30.000 h	0% 100%		<1.0sec	300°	Hg free	UV free

1 / 25



18W




art.nr.: **TLS202**


typ: T8/1200/88SMD/2835/6500K

	1870 Lm	6500K	AC 100-240V	-20 °C +45 °C	IP50	Ra=80								
G13	1870	6500K	AC	-20 °C +45 °C	IP50	Ra=80	20.000	30.000 h	0% 100%		<1.0sec	300°	Hg free	UV free

1 / 25




22W



art.nr.: **TLS223**


typ: T8/1500/104SMD/2835/4100K



1 / 25


- G13
- 2150 Lm
- 4100K
- AC 100-240V
- 20°C +45°C
- IP50
- Ra ≥ 80
- 20.000
- 30.000 h
- 0% 100%
- Mercury free
- <1.0sec
- 300°
- Hg free
- UV free

22W



art.nr.: **TLS203**



typ: T8/1500/104SMD/2835/6500K



1 / 25

- G13
- 2200 Lm
- 6500K
- AC 100-240V
- 20°C +45°C
- IP50
- Ra ≥ 80
- 20.000
- 30.000 h
- 0% 100%
- Mercury free
- <1.0sec
- 300°
- Hg free
- UV free

7W





art.nr.: ZFR102

tup: T18/E14/7W

1 / 100 / 1000



15W




art.nr.: ZFR103

tup: T18/E14/15W

1 / 100 / 1000





← min.8,1kg →

art.nr.: **T2100UV**
size: 100/2,5mm

8 585040 906014

1/550


max Ø 22mm

UL 94V-2

PA6.6

-20 °C
+85 °C

Halogen free



← min.8,1kg →

art.nr.: **T2101UV**
size: 100/2,5mm

8 585040 906021

1/550

max Ø 22mm

UL 94V-2

PA6.6

-20 °C
+85 °C

Halogen free



← min.8,1kg →

art.nr.: **T2140UV**
size: 140/2,5mm

8 585040 906038

1/450


max Ø 33mm

UL 94V-2

PA6.6

-20 °C
+85 °C

Halogen free



← min.8,1kg →

art.nr.: **T2141UV**
size: 140/2,5mm

8 585040 906045

1/450

max Ø 33mm

UL 94V-2

PA6.6

-20 °C
+85 °C

Halogen free



← min.8,1kg →

art.nr.: **T2200UV**
size: 200/2,5mm

8 585040 906052

1/300


max Ø 53mm

UL 94V-2

PA6.6

-20 °C
+85 °C

Halogen free



← min.8,1kg →

art.nr.: **T2201UV**
size: 200/2,5mm

8 585040 906069

1/300

max Ø 53mm

UL 94V-2

PA6.6

-20 °C
+85 °C

Halogen free



← min.18,2kg →

art.nr.: **T3140UV**
size: 140/3,6mm

8 585040 906076

1/300


max Ø 33mm

UL 94V-2

PA6.6

-20 °C
+85 °C

Halogen free



← min.18,2kg →

art.nr.: **T3141UV**
size: 140/3,6mm

8 585040 906083

1/300

max Ø 33mm

UL 94V-2

PA6.6


-20 °C
+85 °C

Halogen free



art.nr.: **T3201UV**
size: 200/3,6mm

max ∅ 53mm | UL 94V-2 | PA6.6 | -20°C +85°C | Halogen free




1/200

8 585040 906106



art.nr.: **T3200UV**
size: 200/3,6mm

max ∅ 53mm | UL 94V-2 | PA6.6 | -20°C +85°C | Halogen free



1/200

8 585040 906090



art.nr.: **T3251UV**
size: 250/3,6mm

max ∅ 65mm | UL 94V-2 | PA6.6 | -20°C +85°C | Halogen free



1/200

8 585040 906144



art.nr.: **T3250UV**
size: 250/3,6mm

max ∅ 65mm | UL 94V-2 | PA6.6 | -20°C +85°C | Halogen free




1/200

8 585040 906113



art.nr.: **T3301UV**
size: 300/3,6mm

max ∅ 76mm | UL 94V-2 | PA6.6 | -20°C +85°C | Halogen free




1/170

8 585040 906137



art.nr.: **T3300UV**
size: 300/3,6mm

max ∅ 76mm | UL 94V-2 | PA6.6 | -20°C +85°C | Halogen free



1/170

8 585040 906120



art.nr.: **T4201UV**
size: 200/4,8mm

max ∅ 53mm | UL 94V-2 | PA6.6 | -20°C +85°C | Halogen free



1/150

8 585040 906182




art.nr.: **T4200UV**
size: 200/4,8mm

max ∅ 53mm | UL 94V-2 | PA6.6 | -20°C +85°C | Halogen free



1/150

8 585040 906175



← min.22,2kg →

art.nr.: **T4250UV**
size: 250/4,8mm

8 585040 906151

1/120


max Ø 65mm

UL 94V-2

PA6.6

-20 °C
+85 °C

Halogen free



← min.22,2kg →

art.nr.: **T4251UV**
size: 250/4,8mm

8 585040 906168

1/120

max Ø 65mm

UL 94V-2

PA6.6

-20 °C
+85 °C

Halogen free



← min.22,2kg →

art.nr.: **T4300UV**
size: 300/4,8mm

8 585040 906199

1/110

max Ø 76mm

UL 94V-2

PA6.6

-20 °C
+85 °C

Halogen free



← min.22,2kg →

art.nr.: **T4301UV**
size: 300/4,8mm

8 585040 906205

1/110


max Ø 76mm

UL 94V-2

PA6.6

-20 °C
+85 °C

Halogen free



← min.22,2kg →

art.nr.: **T4370UV**
size: 370/4,8mm

8 585040 906212

1/90


max Ø 102mm

UL 94V-2

PA6.6

-20 °C
+85 °C

Halogen free



← min.22,2kg →

art.nr.: **T4371UV**
size: 370/4,8mm

8 585040 906229

1/90

max Ø 102mm

UL 94V-2

PA6.6

-20 °C
+85 °C

Halogen free



← min.22,2kg →

art.nr.: **T4430UV**
size: 430/4,8mm

8 585040 906236

1/75


max Ø 125mm

UL 94V-2

PA6.6

-20 °C
+85 °C

Halogen free



← min.22,2kg →

art.nr.: **T4431UV**
size: 430/4,8mm

8 585040 906243

1/75

max Ø 125mm

UL 94V-2

PA6.6


-20 °C
+85 °C

Halogen free



art.nr.: **T7201UV**
size: 200/7,6mm

max Ø 53mm	UL 94V-2	PA6.6	-20°C +85°C	Hg free
---------------	-------------	-------	----------------	------------




1 / 70

8 585040 906250



art.nr.: **T7251UV**
size: 250/7,6mm

max Ø 65mm	UL 94V-2	PA6.6	-20°C +85°C	Hg free
---------------	-------------	-------	----------------	------------




1 / 60

8 585040 906267



art.nr.: **T7301UV**
size: 300/7,6mm

max Ø 76mm	UL 94V-2	PA6.6	-20°C +85°C	Hg free
---------------	-------------	-------	----------------	------------



1 / 50

8 585040 906274



art.nr.: **T7371UV**
size: 370/7,6mm

max Ø 102mm	UL 94V-2	PA6.6	-20°C +85°C	Hg free
----------------	-------------	-------	----------------	------------



1 / 40

8 585040 906281



art.nr.: **T7431UV**
size: 430/7,6mm

max Ø 125mm	UL 94V-2	PA6.6	-20°C +85°C	Hg free
----------------	-------------	-------	----------------	------------



1 / 30

8 585040 906298



art.nr.: **T7531UV**
size: 530/7,6mm

max Ø 140mm	UL 94V-2	PA6.6	-20°C +85°C	Hg free
----------------	-------------	-------	----------------	------------




1 / 25

8 585040 906762




art.nr.: **T7530UV**
size: 530/7,6mm

max Ø 140mm	UL 94V-2	PA6.6	-20°C +85°C	Hg free
----------------	-------------	-------	----------------	------------



1 / 25

8 585040 906779



← min. 54,4kg →

art.nr.: **T7750UV**
size: 750/7,6mm

1/20

8 585040 906304


max Ø 218mm

UL 94V-2

PA6.6

-20 °C
+85 °C

Halogen free



← min. 54,4kg →

art.nr.: **T7751UV**
size: 750/7,6mm

1/20

8 585040 906311

max Ø 218mm

UL 94V-2

PA6.6

-20 °C
+85 °C


Halogen free



← min. 79,4kg →

1/25

8 585040 906328



art.nr.: **T9431UV**
size: 430/9,0mm


max Ø 125mm

UL 94V-2

PA6.6

-20 °C
+85 °C

Halogen free



← min. 79,4kg →

art.nr.: **T9780UV**
size: 780/9,0mm

1/18

8 585040 906335


max Ø 220mm

UL 94V-2

PA6.6

-20 °C
+85 °C

Halogen free



← min. 79,4kg →

art.nr.: **T9781UV**
size: 780/9,0mm

1/18

8 585040 906342

max Ø 220mm

UL 94V-2

PA6.6

-20 °C
+85 °C


Halogen free



← min. 114,0kg →

1/6

8 585040 906359



art.nr.: **T12031UV**
size: 1030/12,6mm

max Ø 295mm

UL 94V-2


PA6.6

-20 °C
+85 °C

Halogen free




art.nr.: **TR7201UV**
size: 200/76mm



max \varnothing 50mm | UL 94V-2 | PA6.6 | -20°C +85°C | Halogen free



art.nr.: **TR7301UV**
size: 300/76mm




max \varnothing 80mm | UL 94V-2 | PA6.6 | -20°C +85°C | Halogen free




art.nr.: **TH01**

UL 94V-2 | PA6.6 | -20°C +85°C | Halogen free




art.nr.: **TMS01**

UL 94V-2 | PA6.6 | -20°C +85°C | Halogen free




art.nr.: **TMS01/BK**

UL 94V-2 | PA6.6 | -20°C +85°C | Halogen free




art.nr.: **TMS02**


UL 94V-2 | PA6.6 | -20°C +85°C | Halogen free



art.nr.: **TMS02/BK**

UL 94V-2 | PA6.6 | -20°C +85°C | Halogen free




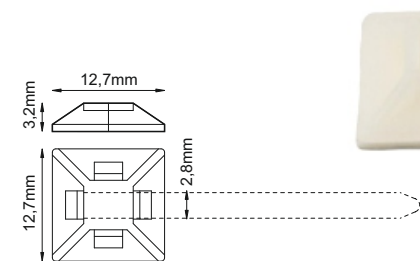

art.nr.: **TMA1212**




1 / 550



art.nr.: **TMA1212/BK**




1 / 550



art.nr.: **TMA1919**




1 / 240



art.nr.: **TMA1919/BK**




1 / 240



art.nr.: **TMA2828**



1 / 100



art.nr.: **TMA2828/BK**



1 / 100



art.nr.: **TP1510/BK**

size: 15mm/10m

 0.13mm	40.0kV	-25°C +90°C	PVC
---	--------	----------------	-----



1 / 10 / 600



art.nr.: **TP1510/BL**

size: 15mm/10m

 0.13mm	40.0kV	-25°C +90°C	PVC
--	--------	----------------	-----



1 / 10 / 600



art.nr.: **TP1510/BR**

size: 15mm/10m

 0.13mm	40.0kV	-25°C +90°C	PVC
---	--------	----------------	-----



1 / 10 / 600



art.nr.: **TP1510/GR**

size: 15mm/10m

 0.13mm	40.0kV	-25°C +90°C	PVC
--	--------	----------------	-----



1 / 10 / 600



art.nr.: **TP1510/RD**

size: 15mm/10m

 0.13mm	40.0kV	-25°C +90°C	PVC
---	--------	----------------	-----




1 / 10 / 600



art.nr.: **TP1510/WH**

size: 15mm/10m

 0.13mm	40.0kV	-25°C +90°C	PVC
--	--------	----------------	-----



1 / 10 / 600



art.nr.: **TP1510/YE**

size: 15mm/10m

 0.13mm	40.0kV	-25°C +90°C	PVC
---	--------	----------------	-----



1 / 10 / 600



art.nr.: **TP1510/YG**

size: 15mm/10m

 0.13mm	40.0kV	-25°C +90°C	PVC
--	--------	----------------	-----



1 / 10 / 600





art.nr.: **TP1910/BK**
size: 19mm/10m



1 / 10 / 300



art.nr.: **TP1910/BL**
size: 19mm/10m



1 / 10 / 300



art.nr.: **TP1910/BR**
size: 19mm/10m



1 / 10 / 300



art.nr.: **TP1910/GR**
size: 19mm/10m



1 / 10 / 300



art.nr.: **TP1910/RD**
size: 19mm/10m



1 / 10 / 300



art.nr.: **TP1910/WH**
size: 19mm/10m



1 / 10 / 300



art.nr.: **TP1910/YE**
size: 19mm/10m



1 / 10 / 300



art.nr.: **TP1910/YG**
size: 19mm/10m



1 / 10 / 300





art.nr.: **TP1920/BK**
size: 19mm/20m

1 / 10 / 300

0.13mm	40.0kV	-25°C +90°C	PVC
--------	--------	----------------	-----

8 585040 906601



art.nr.: **TP1920/BL**
size: 19mm/20m

1 / 10 / 300

0.13mm	40.0kV	-25°C +90°C	PVC
--------	--------	----------------	-----

8 585040 906618



art.nr.: **TP1920/BR**
size: 19mm/20m

1 / 10 / 300

0.13mm	40.0kV	-25°C +90°C	PVC
--------	--------	----------------	-----

8 585040 906663



art.nr.: **TP1920/GR**
size: 19mm/20m

1 / 10 / 300

0.13mm	40.0kV	-25°C +90°C	PVC
--------	--------	----------------	-----

8 585040 906656



art.nr.: **TP1920/RD**
size: 19mm/20m

1 / 10 / 300

0.13mm	40.0kV	-25°C +90°C	PVC
--------	--------	----------------	-----

8 585040 906625




art.nr.: **TP1920/WH**
size: 19mm/20m

1 / 10 / 300

0.13mm	40.0kV	-25°C +90°C	PVC
--------	--------	----------------	-----

8 585040 906632



art.nr.: **TP1920/YE**
size: 19mm/20m

1 / 10 / 300

0.13mm	40.0kV	-25°C +90°C	PVC
--------	--------	----------------	-----

8 585040 906649



art.nr.: **TP1920/YG**
size: 19mm/20m

1 / 10 / 300

0.13mm	40.0kV	-25°C +90°C	PVC
--------	--------	----------------	-----

8 585040 906670





art.nr.: **TP2510/BK**
size: 25mm/10m



1 / 10 / 300

0.13mm	40.0kV	-25°C +90°C	PVC
--------	--------	----------------	-----



art.nr.: **TP3810/BK**
size: 38mm/10m



1 / 6 / 180

0.13mm	40.0kV	-25°C +90°C	PVC
--------	--------	----------------	-----



art.nr.: **TP5010/BK**
size: 50mm/10m



1 / 5 / 150

0.13mm	40.0kV	-25°C +90°C	PVC
--------	--------	----------------	-----



art.nr: **BH201**
 typ: E27/4A/PC/B



1 / 50 / 500



art.nr: **BH211**
 typ: E27/4A/PC/W



1 / 50 / 500



art.nr: **BH101**
 typ: GU10/1A/C



1 / 100 / 1000



art.nr: **BH203**
 typ: E27/4A/PO



1 / 20 / 200





art.nr: **BH521**
tup: E27/1-160-9/S

art.nr: **BH511**
tup: E27/1-160-9/W



	max 60W	METAL	100cm
--	------------	-------	-------

	max 60W	METAL	100cm
--	------------	-------	-------



art.nr: **BH522**
tup: E27/1-271/S

art.nr: **BH512**
tup: E27/1-271/W



	max 60W	METAL	100cm
--	------------	-------	-------

	max 60W	METAL	100cm
--	------------	-------	-------

AAS01		13	FLO3		77
AAS02		13	FL10C		77
AAS03		13	FS01R		78
AAS11		07	FS02R		78
AS02		13	FS03R		79
BB01	BIB/80/BK	134	HU12		14
BH101	GU10/1A/C	182	HU21		17
BH201	E27/4A/PC/B	182	HU22		17
BH203	E27/4A/PO	182	HU23		17
BH211	E27/4A/PC/W	182	LB01		87
BH511	E27/1-160-9/W	183	LC721A/SI	CLR0/12W/SMD/4000K/SI	25
BH512	E27/1-271/W	183	LC721S	CLR4/12W/SMD/4000K	25
BH521	E27/1-160-9/S	183	LC722A/SI	CLR0/18W/SMD/4000K/SI	27
BH522	E27/1-271/S	183	LC722S	CLR4/18W/SMD/4000K	27
CAP1	ECL/1P67	115	LC722SM	CLR4/15W/SMD/4000K/MS	33
CU21/120		17	LC723A/SI	CLR0/24W/SMD/4000K/SI	28
CU21/60		17	LC723S	CLR4/24W/SMD/4000K	28
CU22/120		17	LC724A/SI	CLR0/50W/SMD/4000K/SI	31
CU22/60		17	LC724A/SI/S	CLS0/50W/SMD/4000K/SI	31
CU23/120		17	LC724S	CLR4/50W/SMD/4000K	29
CU23/60		17	LC724S/S	CLS4/50W/SMD/4000K	29
CW132	C20A/WP/3x1,5/2	120	LC725A/SI/R	CLE0/60W/SMD/4000K/SI	32
CW133	C20A/WP/3x1,5/3	120	LC725R/R	CLE5/60W/SMD/4000K	32
CW134	C20A/WP/3x1,5/4	120	LC741S	CLR4/12W/SMD/2700K/AS	26
DL1201/W		60	LC751S	CLR4/12W/SMD/4000K/AS	26
DL1202/W		60	LC754S	CLR4/50W/SMD/4000K/AS	30
DL1203/B		61	LC754S/S	CLS4/50W/SMD/4000K/AS	30
DL1204/W		61	LC755S/R	CLE4/60W/SMD/4000K/AS	33
DL1205/B		62	LC800A/SI	CLR0/24W/RC/SI	34
DL1205/W		62	LC800P	CLR6/24W/SMD/RC	35
DL1206/W		63	LC800S	CLR4/24W/SMD/RC	34
DL1207/W		63	LC801A/BCH	CLR0/50W/SMD/RC/BCH	42
DL1208/B		64	LC801A/GD	CLR0/50W/SMD/RC/GD	40
DL1208/W		64	LC801A/GD/S	CLS0/50W/SMD/RC/GD	40
DL2301/B		65	LC801A/SI	CLR0/50W/SMD/RC/SI	39
DL2301/W		65	LC801A/SI/S	CLS0/50W/SMD/RC/SI	39
DL3202/B		66	LC801L	CLR7/50W/SMD/RC	35
DL3205/W		73	LC801S	CLR4/50W/SMD/RC	36
DL3303/B		67	LC801S/S	CLS4/50W/SMD/RC	36
DL3303/W		67	LC802K	CLR5/60W/SMD/RC	44
DL3304/B		68	LC803S	CLR4/90W/SMD/RC	44
DL3304/W		68	LC811A/BK	CLR0/50W/SMD/RC/BK/AS	41
DL3401/W		66	LC811A/BK/S	CLS0/50W/SMD/RC/BK/AS	41
DL4301/B		69	LC811D	CLR3/50W/SMD/RC/AS	43
DL4301/W		69	LC811S	CLR4/50W/SMD/RC/AS	37
DL4302/W		70	LC811S/S	CLS4/50W/SMD/RC/AS	37
DL4303/W		70	LC811U	CLR2/50W/SMD/RC/AS	42
DL4304/B		71	LC811W	CLR1/50W/SMD/RC/AS	38
DL4304/W		71	LC811W/S	CLS1/50W/SMD/RC/AS	38
DL4305/B		72	LC812U	CLR2/60W/SMD/RC/AS	43
DL4306/B		72	LC813S	CLR4/90W/SMD/RC/AS	45
DL5301/S		73	LC814S	CLR4/150W/SMD/RC/AS	45
DL5302/B		74	LCL122A	CR1/18W/SMD/4000K/A	22
DL5303/B		74	LCL122B	CR1/18W/SMD/4000K/B	22
FCL01		75	LCL1223A	CR2/24W/SMD/4000K/A	23
FCL02		75	LCL421	CLR12W/24SMD/5730/4000K	20
FL01		76	LCL421/44	CLR12W/24SMD/5730/4000K/44	21
FL02		76	LCL421M	CLR12W/24SMD/5730/4000K/MS	20

LCL421M/44	CLR12W/24SMD/5730/4000K/MS/44	21	LFL122	FL103/4000K	110
LCL533	CLR26W/96SMD/2835/RC/AS	23	LFL122S	FL113/4000K	111
LCL636	CLR65W/144SMD/1R/AS	24	LFL123	FL104/4000K	112
LCL636T	CLT65W/144SMD/1R/AS	24	LFL124	FL105/4000K	113
LDL143	DR01/7W/SMD/3000K/WH	47	LGL411	GL502/2800K	118
LDL143/S	DR01/7W/SMD/3000K/SI	47	LGL413	GL522/2800K	119
LDL153	DR01/7W/SMD/4000K/WH	46	LGL421	GL502/4000K	118
LDL153/S	DR01/7W/SMD/4000K/SI	46	LGL423	GL522/4000K	119
LDL154	DR01/10W/SMD/4000K/WH	48	LGL514	GL501/2800K	116
LDL154/S	DR01/10W/SMD/4000K/SI	48	LGL514S	GL511/2800K	117
LDL253	DR02/7W/SMD/4000K/WH	49	LGL524	GL501/4000K	116
LDL253/S	DR02/7W/SMD/4000K/SI	49	LGL524S	GL511/4000K	117
LEL101	EML01/3W/3H/6000K	18	LHO1R		84
LEL201	EML02/1W/3H/6000K	18	LHO2R		84
LEL301	EML03/2W/3H/6000K	19	LHO3R		85
LEL401	EML04/3W/3H/6000K	19	LHO4R		85
LF1021	F01-10/4000K	121	LHO5R		86
LF1021S	F01-10/4000K/SE	121	LHI31		87
LF1022	F01-20/4000K	122	LHZ41		86
LF1022S	F01-20/4000K/SE	122	LM101		89
LF1023	F01-30/4000K	123	LM102		89
LF1023S	F01-30/4000K/SE	123	LN201		88
LF2021	F02-10/4000K/BK	124	LNL121/1	WTL9W/1/300/2835/4000K	50
LF2021S	F02-10/4000K/BK/PS	125	LNL122/1	WTL18W/1/600/2835/4000K	50
LF2022	F02-20/4000K/BK	126	LNL122/3	WTL20W/3/600/2835/4000K	50
LF2022H	F02-20/4000K/BK/H	127	LNL123/1	WTL36W/1/1200/2835/4000K	51
LF2022MS	F02-20/4000K/BK/MS	129	LNL124	WTL40W/1200/2835/4000K	51
LF2022S	F02-20/4000K/BK/PS	128	LNL323/1	LW36W/1/1200/2835/4000K	56
LF2023	F02-30/4000K/BK	129	LNL323/2	LW40W/2/1200/2835/4000K	56
LF2023H	F02-30/4000K/BK/H	131	LNL324/3	LW40W/3/1200/2835/4000K	57
LF2023S	F02-30/4000K/BK/PS	131	LNL324/3E	LW40W/3/1200/2835/4000K/E	58
LF2024	F02-50/4000K/BK	132	LNL324/3S	LW40W/3/1200/2835/4000K/MS	58
LF2024H	F02-50/4000K/BK/H	133	LNL325/3	LW50W/3/1500/2835/4000K	57
LF2024S	F02-50/4000K/BK/PS	133	LNL423	LW40W/1200/2835/4000K	58
LF2025	F02-100/4000K/BK	134	LNL7121/SI	LB01/15W/600/SMD/4000K/SI	54
LF2121	F02-10/4000K/WH	124	LNL7121/WH	LB01/15W/600/SMD/4000K/WH	54
LF2122	F02-20/4000K/WH	126	LNL7221/SI	LB11/15W/600/SMD/4000K/SI	54
LF2122S	F02-20/4000K/WH/PS	128	LNL7321/SI	LB02/15W/600/SMD/4000K/SI	55
LF2123	F02-30/4000K/WH	130	LNL7421/WH	LB03/15W/600/SMD/4000K/WH	55
LF2124	F02-50/4000K/WH	132	LNL7521/CH	LB04/15W/600/SMD/4000K/CH	55
LF2221	F02-10/4000K/GY	125	LNL822	T5/9W/600/2835/4000K	53
LF2222	F02-20/4000K/GY	127	LNL823	T5/12W/900/2835/4000K	53
LF2223	F02-30/4000K/GY	130	LNL922	BL10W/600/2835/4000K	52
LF4023	F04-30/5000K/BK	135	LNL923	BL15W/900/2835/4000K	52
LF4024	F04-50/5000K/BK	135	LPL111	PR6W/30SMD/2835/2800K	94
LF4025	F04-100/5000K/BK	136	LPL113	PR12W/60SMD/2835/2800K	95
LF4027	F04-200/5000K/BK	136	LPL113H	PR12W/120SMD/2835/2800K/HV	106
LF5023	F05-30/5000K/BK	137	LPL114	PR18W/90SMD/2835/2800K	96
LF5024	F05-50/5000K/BK	137	LPL115	PR24W/120SMD/2835/2800K	97
LF5025	F05-100/5000K/BK	137	LPL121	PR6W/30SMD/2835/4000K	94
LFL110	FL101/2800K	108	LPL123	PR12W/60SMD/2835/4000K	95
LFL111	FL102/2800K	109	LPL123H	PR12W/120SMD/2835/4000K/HV	106
LFL112	FL103/2800K	110	LPL124	PR18W/90SMD/2835/4000K	96
LFL112S	FL113/2800K	111	LPL125	PR24W/120SMD/2835/4000K	97
LFL113	FL104/2800K	112	LPL211	PS6W/30SMD/2835/2800K	98
LFL114	FL105/2800K	113	LPL213	PS12W/60SMD/2835/2800K	99
LFL120	FL101/4000K	108	LPL213H	PS12W/120SMD/2835/2800K/HV	107
LFL121	FL102/4000K	109	LPL214	PS18W/90SMD/2835/2800K	100

LPL215	PS24W/120SMD/2835/2800K	101	T3140UV	171	
LPL221	PS6W/30SMD/2835/4000K	98	T3141UV	171	
LPL223	PS12W/60SMD/2835/4000K	99	T3200UV	172	
LPL223H	PS12W/120SMD/2835/4000K/HV	107	T3201UV	172	
LPL224	PS18W/90SMD/2835/4000K	100	T3250UV	172	
LPL225	PS24W/120SMD/2835/4000K	101	T3251UV	172	
LPL321	PRSF6W/30SMD/2835/4000K	102	T3300UV	172	
LPL323	PRSF12W/60SMD/2835/4000K	102	T3301UV	172	
LPL324	PRSF18W/90SMD/2835/4000K	103	T4200UV	172	
LPL325	PRSF24W/120SMD/2835/4000K	103	T4201UV	172	
LPL421	PSSF6W/30SMD/2835/4000K	104	T4250UV	173	
LPL423	PSSF12W/60SMD/2835/4000K	104	T4251UV	173	
LPL424	PSSF18W/90SMD/2835/4000K	105	T4300UV	173	
LPL425	PSSF24W/120SMD/2835/4000K	105	T4301UV	173	
LS401		88	T4370UV	173	
LSF101	SL60/12V	115	T4371UV	173	
LSL121	SL-1/4000K	06	T4430UV	173	
LSL222	SL2-60W/4000K	06	T4431UV	173	
LSL322	SL3-50/4000K	07	T7201UV	174	
LSL323	SL3-100/4000K	07	T7251UV	174	
LSL422	SL4-60/5000K	08	T7301UV	174	
LSL423	SL4-80/5000K	08	T7371UV	174	
LSL511	SL5-40/2700K	09	T7431UV	174	
LSL512	SL5-60/2700K	10	T7530UV	174	
LSL513	SL5-80/2700K	11	T7531UV	174	
LSL521	SL5-40/5000K	09	T7750UV	175	
LSL522	SL5-60/5000K	10	T7751UV	175	
LSL523	SL5-80/5000K	11	T9431UV	175	
LSL621/RP	SL6-40/5000K/RP	12	T9780UV	175	
LU112/SR	HB02/150W/S01/10/5000K/SR	14	T9781UV	175	
LU221/1	HB03/100W/ZH1/10/5000K	15	T12031UV	175	
LU222/1	HB03/150W/ZH1/10/5000K	15	TH01	176	
LU222/DALI	HB03/150W/S0/DALI/5000K	16	TLS201	T8/600/42SMD/2835/6500K	167
LU223/1	HB03/200W/ZH1/10/5000K	15	TLS202	T8/1200/88SMD/2835/6500K	168
LW101		89	TLS203	T8/1500/104SMD/2835/6500K	169
ML01R		90	TLS221	T8/600/42SMD/2835/4100K	167
ML02R		90	TLS222	T8/1200/88SMD/2835/4100K	168
MS121	MSE595x595/WH	93	TLS223	T8/1500/104SMD/2835/4100K	169
PL120P/U	WPL32W/SMD/4500K/PP/WH/UGR	92	TMA1212		177
PL121	WPL40W/SMD/4500K/WH	91	TMA1212/BK		177
PL121H	WPL40W/SMD/4500K/WH/HV	91	TMA1919		177
PL121H/U	WPL40W/SMD/4500K/HV/WH/UGR	92	TMA1919/BK		177
PSF103	PS08/12V	114	TMA2828		177
PSF104	PS30/12V	114	TMA2828/BK		177
RLNL324		59	TMS01		176
RLU112		14	TMS01/BK		176
RLU2/1		16	TMS02		176
SM2/1		16	TMS02/BK		176
SN100	SNA1000mm	93	TP1510/BK		178
SNN250	SNH2500mm	59	TP1510/BL		178
SNR001	SR120/4	93	TP1510/BR		178
SNR180	SR180/2	59	TP1510/GR		178
T2100UV		171	TP1510/RD		178
T2101UV		171	TP1510/WH		178
T2140UV		171	TP1510/YE		178
T2141UV		171	TP1510/YG		178
T2200UV		171	TP1910/BK		179
T2201UV		171	TP1910/BL		179

TP1910/BR		179	ZLS420	G4/2W/2835/4000K/CB/MC	165
TP1910/GR		179	ZLS503	A60/E27/12W/270/6000K	140
TP1910/RD		179	ZLS505	A65/E27/15W/270/6000K	141
TP1910/WH		179	ZLS507	A80/E27/18W/270/6000K/PAB/MC	142
TP1910/YE		179	ZLS509	A95/E27/22W/240/6000K/PAB/MC	143
TP1920/BK		179	ZLS513	A60/E27/12W/270/3000K	140
TP1920/BL		180	ZLS515	A65/E27/15W/270/3000K	141
TP1920/BR		180	ZLS517	A80/E27/18W/270/3000K/PAB/MC	142
TP1920/GR		180	ZLS519	A95/E27/22W/240/3000K/PAB/MC	143
TP1920/RD		180	ZLS523	A60/E27/12W/270/4000K	140
TP1920/WH		180	ZLS525	A65/E27/15W/270/4000K	141
TP1920/YE		180	ZLS527	A80/E27/18W/270/4000K/PAB/MC	142
TP2510/BK		180	ZLS529	A95/E27/22W/240/4000K/PAB/MC	143
TP2510/YG		180	ZLS561	A60/E27/7W/300/6000K	138
TP3810/BK		181	ZLS562	A60/E27/10W/300/6000K	139
TP5010/BK		181	ZLS571	A60/E27/7W/300/3000K	138
TR7201UV		181	ZLS572	A60/E27/10W/300/3000K	139
TR7301UV		176	ZLS581	A60/E27/7W/300/4000K	138
WLO1R		176	ZLS582	A60/E27/10W/300/4000K	139
WLO2R		80	ZLS604C	G9/51SMD/2835/6000K/CB/MC	161
WLO3R		80	ZLS604CD	G9/45SMD/2835/6000K/CB/MC/D	160
WLO4R		81	ZLS614C	G9/51SMD/2835/2800K/CB/MC	161
WLO5R		81	ZLS614CD	G9/45SMD/2835/2800K/CB/MC/D	160
WLO6R		82	ZLS615C	G9/64SMD/2835/2800K/CB	163
WLO7R		82	ZLS615CW	G9/52SMD/2835/2800K/CB/W	162
WLO8R		83	ZLS616C	G9/88SMD/2835/2800K/CB	164
WLF101	WFM/12V	83	ZLS624C	G9/51SMD/2835/4000K/CB/MC	161
WLF102	WF2M/12V	115	ZLS624CD	G9/45SMD/2835/4000K/CB/MC/D	160
WLF103	WF3M/12V	115	ZLS625C	G9/64SMD/2835/4000K/CB	163
WLF201	VDE1M/0/1	115	ZLS625CW	G9/52SMD/2835/4000K/CB/W	162
WLF211	VDE15CM/1/1	53	ZLS626C	G9/88SMD/2835/4000K/CB	164
ZFR102	T18/E14/7W	53	ZLS702	C37/E14/5W/SMD/2835/6000K/PAB/MC	146
ZFR103	T18/E14/15W	170	ZLS704	C37/E14/8W/SMD/2835/6000K/PAB/MC	147
ZLS001	RE/E14/SMD/6000K/MC	170	ZLS712	C37/E14/5W/SMD/2835/3000K/PAB/MC	146
ZLS012C	E14/64SMD/2835/2800K/CB	158	ZLS714	C37/E14/8W/SMD/2835/3000K/PAB/MC	147
ZLS013C	E14/88SMD/2835/2800K/CB	158	ZLS722	C37/E14/5W/SMD/2835/4000K/PAB/MC	146
ZLS022C	E14/64SMD/2835/4000K/CB	159	ZLS724	C37/E14/8W/SMD/2835/4000K/PAB/MC	147
ZLS023C	E14/88SMD/2835/4000K/CB	158	ZLS802	G45/E14/5W/SMD/2835/6000K/PAB/MC	148
ZLS102	GU10/3W/SMD/2835/6000K/PB/MC	159	ZLS804	G45/E14/8W/SMD/2835/6000K/PAB/MC	149
ZLS106	GU10/6W/SMD/2835/6000K/PAB/MC	154	ZLS807	G45/E27/5W/SMD/2835/6000K/PAB/MC	150
ZLS107	GU10/7W/SMD/2835/6000K/PAB/MC	155	ZLS809	G45/E27/8W/SMD/2835/6000K/PAB/MC	151
ZLS108	GU10/8W/SMD/2835/6000K/PAB/MC	156	ZLS812	G45/E14/5W/SMD/2835/3000K/PAB/MC	148
ZLS112	GU10/3W/SMD/2835/3000K/PB/MC	157	ZLS814	G45/E14/8W/SMD/2835/3000K/PAB/MC	149
ZLS116	GU10/6W/SMD/2835/3000K/PAB/MC	154	ZLS817	G45/E27/5W/SMD/2835/3000K/PAB/MC	150
ZLS117	GU10/7W/SMD/2835/3000K/PAB/MC	155	ZLS819	G45/E27/8W/SMD/2835/3000K/PAB/MC	151
ZLS118	GU10/8W/SMD/2835/3000K/PAB/MC	156	ZLS822	G45/E14/5W/SMD/2835/4000K/PAB/MC	148
ZLS122	GU10/3W/SMD/2835/4000K/PB/MC	157	ZLS824	G45/E14/8W/SMD/2835/4000K/PAB/MC	149
ZLS126	GU10/6W/SMD/2835/4000K/PAB/MC	154	ZLS827	G45/E27/5W/SMD/2835/4000K/PAB/MC	150
ZLS127	GU10/7W/SMD/2835/4000K/PAB/MC	155	ZLS829	G45/E27/8W/SMD/2835/4000K/PAB/MC	151
ZLS128	GU10/8W/SMD/2835/4000K/PAB/MC	156	ZLS912	G95/E27/18W/300/3000K/PAB/MC	144
ZLS204	R50/E14/9SMD/2835/6000K/PAB/MC	157	ZLS914	G125/E27/20W/300/3000K/PAB/MC	145
ZLS213	R50/E14/5W/SMD/2835/3000K/PAB/MC	153	ZLS922	G95/E27/18W/300/4000K/PAB/MC	144
ZLS214	R50/E14/9SMD/2835/2800K/PAB/MC	152	ZLS924	G125/E27/20W/300/4000K/PAB/MC	145
ZLS223	R50/E14/5W/SMD/2835/4000K/PAB/MC	153			
ZLS313	MR16/GU5.3/5W/SMD/2835/3000K/PAB/MC	152			
ZLS323	MR16/GU5.3/5W/SMD/2835/4000K/PAB/MC	166			
ZLS410	G4/2W/2835/2800K/CB/MC	166			
		165			

**Certificate
Of
Compliance**

Certificate Number: UN2014062815R-2

Applicant : NEDES, s.r.o.
Havni 35 91921 Zelená, Slovakia.

Manufacturer : NEDES, s.r.o.
Havni 35 91921 Zelená, Slovakia.

Product : LED Bulb Light

Trade Mark : NEDES

Model Number : FX3A66, FX3B066, FX3B6A, FX3C3, FX3D4, FX3A6, FX3D44, FX3F35, FX3A66, FX3A6, FX3A70, FX3D106, FX3D126, FX3C37, FX3A6, FX3D94, FX3A60, FX3A60

Test Standard: EN 6390:2012

The EUT described above has been tested by us with the listed standards and found in compliance with the council LVD Directive 2006/95/EC. It is possible to use CE marking to demonstrate the compliance with LVD Directive.

The certificate applies to the tested sample above mentioned only and shall not imply an assessment of the whole production. It is only valid in connection with the test report number: UN2014062815R-2.

2014-06-28
Date of issue





United testing technology (Hong Kong) Limited
Unit 04, 7/F, Bright Way Tower No. 33 Mong Kok Road, Kowloon, HK.
4/F, Unit 2, Jansing Building, Cheung Kong Industry Area, West Shatin Road, New Territories, Shenzhen, PRC.
Tel: +86-755-89100996 Fax: +86-755-89101156
<http://www.ut-tech.com> E-mail: info@ut-tech.com

**Certificate
Of
Compliance**

Certificate Number: UN2014062815R-3

Applicant : NEDES, s.r.o.
Havni 35 91921 Zelená, Slovakia.

Manufacturer : NEDES, s.r.o.
Havni 35 91921 Zelená, Slovakia.

Product : LED Bulb Light

Trade Name : NEDES

Model Number : FX3A66, FX3B066, FX3B6A, FX3C3, FX3D4, FX3A6, FX3D44, FX3F35, FX3A66, FX3A6, FX3A70, FX3D106, FX3D126, FX3C37, FX3A6, FX3D94, FX3A60, FX3A60

Test Standard: IEC62321-2:2013

The EUT described above has been consolidated by us and found in compliance with the council RoHS Directive 2011/65/EU. It is only valid in connection with the test report number: UN2014062815R-2.

2014-06-28
Date of issue



RoHS



United testing technology (Hong Kong) Limited
Unit 04, 7/F, Bright Way Tower No. 33 Mong Kok Road, Kowloon, HK.
4/F, Unit 2, Jansing Building, Cheung Kong Industry Area, West Shatin Road, New Territories, Shenzhen, PRC.
Tel: +86-755-89100996 Fax: +86-755-89101156
<http://www.ut-tech.com> E-mail: info@ut-tech.com

**Certificate
Of
Compliance**

Certificate Number: UN2014062815R-4

Applicant : NEDES, s.r.o.
Havni 35 91921 Zelená, Slovakia.

Manufacturer : NEDES, s.r.o.
Havni 35 91921 Zelená, Slovakia.

Product : LED Bulb Light

Trade Name : NEDES

Model Number : FX3A66, FX3B066, FX3B6A, FX3C3, FX3D4, FX3A6, FX3D44, FX3F35, FX3A66, FX3A6, FX3A70, FX3D106, FX3D126, FX3C37, FX3A6, FX3D94, FX3A60, FX3A60

Test Standard: EN60910-2:2013
EN1547:2008
EN1000-3-2:2006+A1:2009+A2:2003, EN1000-3-3:2013
EN1000-4-2:2009, EN1000-4-3:2006+A2:2010,
EN1000-4-3:2004+A1:2010, EN1000-4-5:2006, EN1000-4-6:2009,
EN1000-4-8:2010, EN1000-4-11:2004

The EUT described above has been tested by us with the listed standards and found in compliance with the council EMC Directive 2004/103/EC. It is possible to use CE marking to demonstrate the compliance with EMC Directive.

The certificate applies to the tested sample above mentioned only and shall not imply an assessment of the whole production. It is only valid in connection with the test report number: UN2014062815R-2.

2014-06-28
Date of issue





United testing technology (Hong Kong) Limited
Unit 04, 7/F, Bright Way Tower No. 33 Mong Kok Road, Kowloon, HK.
4/F, Unit 2, Jansing Building, Cheung Kong Industry Area, West Shatin Road, New Territories, Shenzhen, PRC.
Tel: +86-755-89100996 Fax: +86-755-89101156
<http://www.ut-tech.com> E-mail: info@ut-tech.com

**Certificate
Of
Compliance**

Certificate Number: UN2014062815R-1

Applicant : NEDES, s.r.o.
Havni 35 91921 Zelená, Slovakia.

Manufacturer : NEDES, s.r.o.
Havni 35 91921 Zelená, Slovakia.

Product : Led Light

Trade Name : NEDES

Model Number : QR, QR, CGU10, CMR16, LGU10, LMR16, GU10-120, MR16-120, GX53, WL368, WL488, GU10-8730-SMD, GU10-COB, GU10-2838-SMD

Test Standard: EN 6390:2012

The EUT described above has been tested by us with the listed standards and found in compliance with the council LVD Directive 2006/95/EC. It is possible to use CE marking to demonstrate the compliance with LVD Directive.

The certificate applies to the tested sample above mentioned only and shall not imply an assessment of the whole production. It is only valid in connection with the test report number: UN2014062815R-1.

2014-06-28
Date of issue





United testing technology (Hong Kong) Limited
Unit 04, 7/F, Bright Way Tower No. 33 Mong Kok Road, Kowloon, HK.
4/F, Unit 2, Jansing Building, Cheung Kong Industry Area, West Shatin Road, New Territories, Shenzhen, PRC.
Tel: +86-755-89100996 Fax: +86-755-89101156
<http://www.ut-tech.com> E-mail: info@ut-tech.com

**Certificate
Of
Compliance**

Certificate Number: UN2014062815R-5

Applicant : NEDES, s.r.o.
Havni 35 91921 Zelená, Slovakia.

Manufacturer : NEDES, s.r.o.
Havni 35 91921 Zelená, Slovakia.

Product : Led Light

Trade Name : NEDES

Model Number : QR, QR, CGU10, CMR16, LGU10, LMR16, GU10-120, MR16-120, GX53, WL368, WL488, GU10-8730-SMD, GU10-COB, GU10-2838-SMD

Test Standard: IEC62321-2:2013

The EUT described above has been consolidated by us and found in compliance with the council RoHS Directive 2011/65/EU. It is only valid in connection with the test report number: UN2014062815R-1.

2014-06-28
Date of issue



RoHS



United testing technology (Hong Kong) Limited
Unit 04, 7/F, Bright Way Tower No. 33 Mong Kok Road, Kowloon, HK.
4/F, Unit 2, Jansing Building, Cheung Kong Industry Area, West Shatin Road, New Territories, Shenzhen, PRC.
Tel: +86-755-89100996 Fax: +86-755-89101156
<http://www.ut-tech.com> E-mail: info@ut-tech.com

**Certificate
Of
Compliance**

Certificate Number: UN2014062815R-6

Applicant : NEDES, s.r.o.
Havni 35 91921 Zelená, Slovakia.

Manufacturer : NEDES, s.r.o.
Havni 35 91921 Zelená, Slovakia.

Product : Led Light

Trade Name : NEDES

Model Number : QR, QR, CGU10, CMR16, LGU10, LMR16, GU10-120, MR16-120, GX53, WL368, WL488, GU10-8730-SMD, GU10-COB, GU10-2838-SMD

Test Standard: EN60910-2:2013
EN1547:2008
EN1000-3-2:2006+A1:2009+A2:2003, EN1000-3-3:2013
EN1000-4-2:2009, EN1000-4-3:2006+A2:2010,
EN1000-4-3:2004+A1:2010, EN1000-4-5:2006, EN1000-4-6:2009,
EN1000-4-8:2010, EN1000-4-11:2004

The EUT described above has been tested by us with the listed standards and found in compliance with the council EMC Directive 2004/103/EC. It is possible to use CE marking to demonstrate the compliance with EMC Directive.

The certificate applies to the tested sample above mentioned only and shall not imply an assessment of the whole production. It is only valid in connection with the test report number: UN2014062815R-1.

2014-06-28
Date of issue





United testing technology (Hong Kong) Limited
Unit 04, 7/F, Bright Way Tower No. 33 Mong Kok Road, Kowloon, HK.
4/F, Unit 2, Jansing Building, Cheung Kong Industry Area, West Shatin Road, New Territories, Shenzhen, PRC.
Tel: +86-755-89100996 Fax: +86-755-89101156
<http://www.ut-tech.com> E-mail: info@ut-tech.com



NEDES s.r.o.
Hlavná 35, 91921 Zeleneč, SLOVAKIA
nedes@nedes.sk
IČO: 46257691
IČDPH: SK2023295054

www.nedes.eu